



# NetIQ SecureLogin - Advanced Authentication Plugin

## **Configuration Guide**

Version 5.1.0

# Table of Contents

|                                             |          |
|---------------------------------------------|----------|
| <b>Table of Contents</b> .....              | <b>2</b> |
| <b>Introduction</b> .....                   | <b>3</b> |
| About This Document .....                   | 3        |
| <b>Configuration of NSL AA Plugin</b> ..... | <b>4</b> |
| Configuring SSO Authentication .....        | 4        |
| Enabling Kiosk Mode .....                   | 6        |

# Introduction

## About This Document

### Purpose of the Document

This NetIQSecureLogin Advanced Authentication Plugin Configuration Guide is intended for system administrators and describes how to install NetIQ SecureLogin Advanced Authentication Plugin.

### Document Conventions

This document uses the following conventions:

**Warning.** This sign indicates requirements or restrictions that should be observed to prevent undesirable effects.

**Important notes.** This sign indicates important information you need to know to use the product successfully.

**Notes.** This sign indicates supplementary information you may need in some cases.

**Tips.** This sign indicates recommendations.

- Terms are italicized, e.g.: ***Authenticator***.
- Names of GUI elements such as dialogs, menu items, and buttons are put in bold type, e.g.: the **Logon** window.

## Configuration of NSL AA Plugin

NetIQ SecureLogin Advanced Authentication Plugin permits to use authenticators that are supported by NetIQ Advanced Authentication Framework instead of using a password for SSO authentication.

NSL AA Plugin supports 2 modes of operation:

- Single Sign On (SSO) authentication in application;
- Kiosk mode.

## Configuring SSO Authentication

If the user wants to use dynamic Username and have an opportunity to edit it, then the user is required to create the following registry: **BlankUsername**.


**Registry Path:**HKEY\_LOCAL\_MACHINE\SOFTWARE\NetIQ\NSLPlugin;

**Registry Type:**DWORD;

**Registry Name:**BlankUsername;


**Registry Value:**1.

The Username field will be empty and the user will be provided with an opportunity to enter the **Username**:

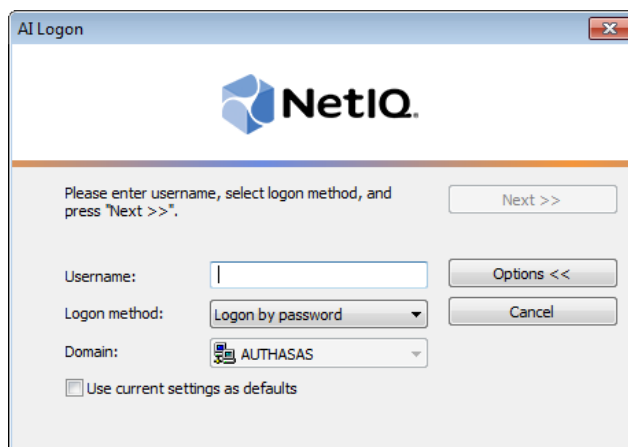

SecureLogin can prompt the user to re-authenticate with their network credentials or strong authentication device before SecureLogin retrieves and submit the applications credentials.

While adding the new application, click **Yes** at the **Re-authentication** step to enforce re-authentication and select one of methods of authentication:

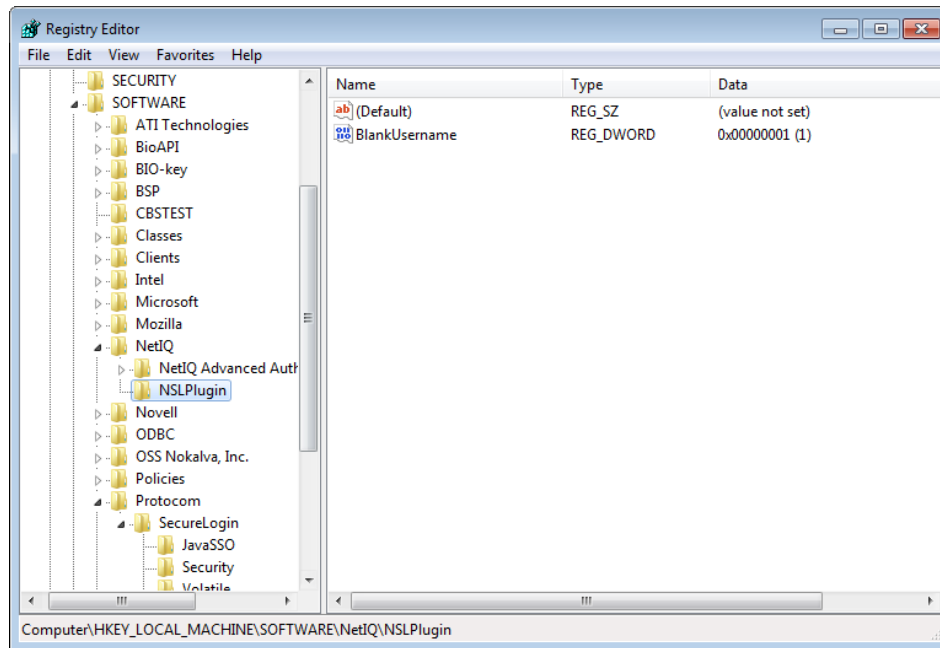

 The list of the available methods of authentication depends on installed elements of Biometric Service Provider (BSP).

All other steps are reproduced as during the standardized procedure of adding an application.

Click **Apply** to save changes.

## Enabling Kiosk Mode

To enable kiosk mode, create the following registry:

**Registry Path:** HKEY\_LOCAL\_MACHINE\SOFTWARE\Protocom\SecureLogin;

**Registry Type:** DWORD;

**Registry Name:** NSLADAUTH;

**Registry Value:** 1.