

User Application: Design Guide

Designer for Identity Manager Roles Based Provisioning Tools 4.0.2

June 15, 2012

Legal Notices

Novell, Inc. makes no representations or warranties with respect to the contents or use of this documentation, and specifically disclaims any express or implied warranties of merchantability or fitness for any particular purpose. Further, Novell, Inc. reserves the right to revise this publication and to make changes to its content, at any time, without obligation to notify any person or entity of such revisions or changes.

Further, Novell, Inc. makes no representations or warranties with respect to any software, and specifically disclaims any express or implied warranties of merchantability or fitness for any particular purpose. Further, Novell, Inc. reserves the right to make changes to any and all parts of Novell software, at any time, without any obligation to notify any person or entity of such changes.

Any products or technical information provided under this Agreement may be subject to U.S. export controls and the trade laws of other countries. You agree to comply with all export control regulations and to obtain any required licenses or classification to export, re-export or import deliverables. You agree not to export or re-export to entities on the current U.S. export exclusion lists or to any embargoed or terrorist countries as specified in the U.S. export laws. You agree to not use deliverables for prohibited nuclear, missile, or chemical biological weaponry end uses. See the [Novell International Trade Services Web page \(http://www.novell.com/info/exports/\)](http://www.novell.com/info/exports/) for more information on exporting Novell software. Novell assumes no responsibility for your failure to obtain any necessary export approvals.

Copyright © 2011-2012 Novell, Inc. All rights reserved. No part of this publication may be reproduced, photocopied, stored on a retrieval system, or transmitted without the express written consent of the publisher.

Novell, Inc.
1800 South Novell Place
Provo, UT 84606
U.S.A.
www.novell.com

Online Documentation: To access the latest online documentation for this and other Novell products, see [the Novell Documentation Web page \(http://www.novell.com/documentation\)](http://www.novell.com/documentation).

Novell Trademarks

For Novell trademarks, see [the Novell Trademark and Service Mark list \(http://www.novell.com/company/legal/trademarks/tmlist.html\)](http://www.novell.com/company/legal/trademarks/tmlist.html).

Third-Party Materials

All third-party trademarks are the property of their respective owners.

Contents

About This Guide	11
1 Introduction to the User Application Design Tools	13
1.1 About the Provisioning View	13
1.2 About the Directory Abstraction Layer Editor	14
1.3 About the Provisioning Request Definition Editor	14
1.4 About the ECMA Expression Builder	14
1.5 About the Provisioning Team Editor	15
1.6 About the Roles Catalog	15
1.7 Documenting a Project	15
1.7.1 Provisioning Locales	15
1.7.2 Directory Abstraction Layer	15
1.7.3 Provisioning Request Definitions	16
1.7.4 Provisioning Teams	16
1.7.5 Role Catalog	16
2 Working with the Provisioning View	17
2.1 Setting Up a Provisioning Project	17
2.1.1 Creating a User Application Driver	17
2.1.2 Creating a Role Service Driver	19
2.1.3 Modifying the Role Service Driver Properties	20
2.1.4 About E-Mail Notification Templates	21
2.2 Accessing the Provisioning View	21
2.3 Setting Provisioning View Preferences	23
2.4 Importing Provisioning Objects	23
2.4.1 Importing from a Driver Configuration File	23
2.4.2 Importing from an Identity Vault	23
2.5 Exporting Provisioning Objects	24
2.6 Validating Provisioning Objects	24
2.6.1 Directory Abstraction Layer Objects	25
2.6.2 Provisioning Request Definitions	25
2.6.3 Provisioning Teams	25
2.6.4 Role Configuration Objects	26
2.6.5 Roles	26
2.6.6 Resources	26
2.6.7 User Application Driver Locales	27
2.7 Deploying Provisioning Objects	27
2.7.1 Deploying Provisioning Objects	27
2.7.2 Testing the Deployed Changes	29
2.8 Comparing Provisioning Objects	29
2.9 Specifying Locales and Localization Resource Groups	30
2.9.1 Specifying the Default Locale	30
2.9.2 Defining the User Application's Supported Locales	30
2.9.3 Creating a Custom Localization Resource Group	32
2.10 Localizing Provisioning Objects	35
2.10.1 Using Designer to Localize	36
2.10.2 Supported Languages	37
2.10.3 Exporting and Importing Data to Localize	37

3	Configuring the Directory Abstraction Layer	43
3.1	About the Directory Abstraction Layer	43
3.1.1	Analyzing the User Application's Data Needs	44
3.1.2	About the Directory Abstraction Layer Editor	44
3.1.3	About Directory Abstraction Layer Editor Files	46
3.2	Working with Entities and Attributes	47
3.2.1	About Entities and Attributes	47
3.2.2	Adding Entities	48
3.2.3	Adding Attributes	53
3.2.4	Updating the Schema Elements List	54
3.3	Working with Lists	54
3.4	Working with Queries	57
3.5	Working with Relationships	61
3.6	Working with Configuration Settings	64
3.7	Directory Abstraction Layer Property Reference	65
3.7.1	Entity Properties	65
3.7.2	Attribute Properties	69
3.7.3	Queries Properties	79
3.7.4	Relationship Properties	80
4	Configuring Provisioning Request Definitions	83
4.1	About Provisioning Request Definitions	83
4.2	Using the Provisioning Request Definition Editor	84
4.2.1	Creating a Provisioning Request Definition	84
4.2.2	Starting the Provisioning Request Definition Editor	85
4.2.3	Creating a Provisioning Request Definition By Using a Template	87
4.2.4	Creating a Custom Provisioning Request Definition	93
4.2.5	Creating a Roles Based Provisioning Request Definition	94
4.2.6	Modifying Settings of a Provisioning Request Definition	96
4.3	Provisioning and Workflow Example	102
4.3.1	Step 1: Initiating the Request	102
4.3.2	Step 2: Approving the Request	103
4.3.3	Step 3: Fulfilling the Request	106
4.3.4	Step 4: Completing the Workflow	106
5	Creating Forms for a Provisioning Request Definition	107
5.1	About Forms	107
5.1.1	About Form Control Data Binding	109
5.1.2	About Forms and Events	110
5.2	About the Forms Tab	110
5.2.1	About Form Selection	111
5.2.2	About Form Controls	112
5.3	Creating Forms	114
5.3.1	Creating New Forms	114
5.3.2	Adding Form Controls and Actions	115
5.3.3	Defining Events	117
5.3.4	Using the Scripts Tab	121
5.4	Action Reference	123
5.5	Form Control Reference	125
5.5.1	Data Type for Roles Based Request Forms	127
5.5.2	Data Type for Resource Based Request Forms	127
5.5.3	Controls for User-Entered Comments	127
5.5.4	General Form Control Properties	128
5.5.5	CheckBoxPickList	128
5.5.6	DatePicker	130

5.5.7	DateTimePicker	131
5.5.8	DNContainer	132
5.5.9	DNDisplay	134
5.5.10	DNLookup	136
5.5.11	DNMaker	141
5.5.12	DNQuery	143
5.5.13	Global List	144
5.5.14	Localized Label	145
5.5.15	Html	147
5.5.16	MVCheckbox	147
5.5.17	MVEditor	149
5.5.18	Password	154
5.5.19	PickList	154
5.5.20	Static List	157
5.5.21	Text	158
5.5.22	Text Area	159
5.5.23	Title	160
5.5.24	TrueFalseCheckBox	161
5.5.25	TrueFalseRadioButtons	162
5.5.26	TrueFalseSelectBox	162
5.6	Working with Distinguished Names	163
5.6.1	Formatting DNs	163
5.6.2	Working with Object Selectors	163
5.7	Using DAL Queries in Forms	165
5.8	Printing Forms	170
5.9	Providing Direct Access to a Form	171

6 Creating the Workflow for a Provisioning Request Definition 173

6.1	About the Workflow Tab	173
6.1.1	Canvas	174
6.1.2	Palette	175
6.1.3	Views	176
6.2	Adding Activities to a Workflow	177
6.2.1	Setting the General Properties of an Activity	177
6.2.2	Defining the Data Item Mappings	180
6.2.3	Defining the E-Mail Notification Settings	181
6.3	Adding Flow Paths	182
6.4	Configuring Flow Paths	182
6.5	Guidelines for Creating Workflows	184
6.5.1	Rules for Activities	185
6.5.2	Rules for Flow Paths	185
6.5.3	Understanding Workflow Data	187
6.6	Guidelines for Creating Roles Based Workflows	192
6.6.1	About Role Approval Workflows	192
6.6.2	Writing Custom Role Workflows	194
6.6.3	About Separation of Duties Approval Workflows	198
6.6.4	Customizing the Standard Separation of Duties Workflow	201
6.7	Guidelines for Creating Resource Based Workflows	201
6.7.1	About Resource Approval Workflows	202
6.7.2	Writing Custom Resource Workflows	204
6.8	Debugging a Workflow	207
6.8.1	Using the Log Activity	207
6.8.2	Using the Workflow Database	207
6.8.3	Changing Log Levels	207
6.9	Provisioning Multiple Individuals with One Workflow Instance	208
6.9.1	Basic Steps for Using the Workflow	208
6.9.2	Setting up the Workflow for a Manager to Use	209

6.10	Making Distinguished Name References Portable	210
6.11	Configuring Digital Signature Support	210
6.11.1	Digital Signature Workflow Properties	211
6.11.2	Creating a Signature Declaration	212

7 Workflow Activity Reference 213

7.1	Start Activity	214
7.1.1	Properties	214
7.1.2	Data Item Mapping	215
7.1.3	E-Mail Notification	216
7.2	Approval Activity	216
7.2.1	Properties	217
7.2.2	Data Item Mapping	223
7.2.3	Available ECMAScript Methods	224
7.2.4	E-Mail Notification	224
7.2.5	Addressing an Approval Activity	226
7.3	Log Activity	233
7.3.1	Properties	233
7.3.2	Data Item Mapping	234
7.3.3	E-Mail Notification	234
7.4	Branch Activity	234
7.4.1	Properties	234
7.4.2	Data Item Mapping	235
7.4.3	E-Mail Notification	235
7.5	Merge Activity	235
7.5.1	Properties	235
7.5.2	Data Item Mapping	235
7.5.3	E-Mail Notification	235
7.6	Condition Activity	236
7.6.1	Properties	236
7.6.2	Data Item Mapping	236
7.6.3	E-Mail Notification	236
7.7	Mapping Activity	237
7.7.1	Properties	237
7.7.2	Data Item Mapping	237
7.7.3	E-mail Notification	238
7.8	Workflow Status	238
7.8.1	Properties	238
7.8.2	Data Item Mapping	238
7.8.3	E-Mail Notification	238
7.9	E-Mail Activity	239
7.9.1	Properties	239
7.9.2	Data Item Mapping	239
7.9.3	E-Mail Notification	239
7.10	Role Request Binding Activity	241
7.10.1	Properties	241
7.10.2	Data Item Mapping	241
7.10.3	E-Mail Notification	241
7.11	Role Request Activity	241
7.11.1	Properties	242
7.11.2	Data Item Mapping	246
7.11.3	E-Mail Notification	246
7.12	Resource Request Binding Activity	246
7.12.1	Properties	247
7.12.2	Data Item Mapping	247
7.12.3	E-Mail Notification	247
7.13	Resource Request Activity	247

7.13.1	Properties	248
7.13.2	Data Item Mapping	250
7.13.3	E-Mail Notification	250
7.14	Start Workflow Activity	250
7.14.1	Properties	250
7.14.2	Data Item Mapping	251
7.14.3	E-Mail Notification	251
7.15	Finish Activity	251
7.15.1	Properties	251
7.15.2	Data Item Mapping	252
7.15.3	E-mail Notification	252
7.16	Rest Activity	254
7.16.1	Properties	254
7.16.2	Data Item Mapping	256
7.16.3	E-Mail Notification	257
7.17	Integration Activity	258
7.17.1	Properties	258
7.17.2	Data Item Mapping	259
7.17.3	E-Mail Notification	260
7.18	Entitlement Activity	260
7.18.1	Properties	260
7.18.2	Data Item Mapping	261
7.18.3	E-Mail Notification	261
7.19	Entity Activity	262
7.19.1	Properties	262
7.19.2	Data Item Mapping	263
7.19.3	E-Mail Notification	264
7.19.4	Working with Entity Activities	264

8 Working with Integration Activities 267

8.1	About the Integration Activity	267
8.2	Adding an Integration Activity	267
8.3	Moving Data to and from the Integration Activity	269
8.4	Using the Integration Activity Editor Interface	272
8.4.1	XML Views	273
8.4.2	Action Model	278
8.4.3	WSDL Editor	284
8.4.4	Messages	284
8.4.5	Regenerating Code for the Action Model	285
8.4.6	Adding Actions to the Action Model	285
8.5	Actions	285
8.5.1	Advanced	286
8.5.2	Data Exchange	291
8.5.3	Repeat	296
8.5.4	Comment	303
8.5.5	Decision	304
8.5.6	Function	305
8.5.7	Log	306
8.5.8	Map	307

9 Working with ECMA Expressions 315

9.1	About the ECMA Expression Builder	315
9.1.1	About ECMAScript	316
9.1.2	ECMAScript Capabilities	316
9.1.3	Using the ECMA Expression Builder	316
9.1.4	About Java Integration	319

9.1.5	About XPath Integration	320
9.1.6	About Global Configuration Values Integration	322
9.1.7	About Global ECMAScripts Integration	322
9.1.8	Performance Considerations	322
9.2	ECMAScript Examples	323
9.2.1	General Examples	323
9.2.2	Flowdata Examples	323
9.2.3	Form Control Examples	324
9.2.4	Error Handling	325
9.3	User Application API	325
9.3.1	Form Action Script Methods	326
9.3.2	IDVault Functions	336
9.3.3	nrfRequest Properties and Methods	337
9.4	Role Vault API	342
9.4.1	About the Role Vault API	342
9.4.2	Role Script API Reference	348
9.4.3	Role Vault Bean API Reference	354

10 Configuring Provisioning Teams 365

10.1	About Teams	365
10.1.1	About Team Requests	366
10.1.2	Using a Team to Manage Direct Reports	367
10.2	Managing Teams	367
10.2.1	Creating a Team	367
10.2.2	Deleting a Provisioning Team	370
10.2.3	Creating a Team to Manage Direct Reports	371

11 Configuring Roles 373

11.1	About the Roles Based Provisioning Module	373
11.2	About the Role Catalog	373
11.3	About the Role Editor	374
11.3.1	Understanding Role Hierarchy	374
11.3.2	Using the Role Editor	375
11.3.3	Role Properties Reference	386
11.4	About the Separation of Duties Editor	388
11.4.1	Using the Separation of Duties Editor	388
11.4.2	Separation of Duties Constraints Properties	389
11.5	About the Role Configuration Editor	392
11.5.1	Role Configuration Editor Properties	393
11.6	Importing Roles Defined in CSV Files	395
11.6.1	Setting Up the File to Import	395
11.6.2	Required CSV File Format	398
11.6.3	Using the Wizard to Import Roles	398
11.6.4	Error Handling	400

12 Configuring Resources 401

12.1	About Resources	401
12.2	About the Resource Editor	401
12.2.1	Using the Resource Editor	401
12.2.2	Resource Property Reference	407
12.3	Importing Resources Defined in CSV Files	408
12.3.1	Setting Up the File to Import	408
12.3.2	Required CSV File Format	411
12.3.3	Using the Wizard to Import Roles from a CSV File	412
12.3.4	Error Handling	413

A ECMAScript Core Reference

415

A.1	ECMAScript Operators	415
A.2	Functions/Methods	418
A.3	DOM Methods	418
A.3.1	Node	418
A.3.2	Document	423
A.3.3	Element	428
A.3.4	Attribute	434
A.3.5	CharacterData	435
A.3.6	NodeList	436
A.3.7	NamedNodeMap	438
A.3.8	Text	440
A.3.9	DocumentType	440
A.3.10	DOMImplementation	441
A.3.11	Notation	442
A.3.12	Entity	443
A.3.13	ProcessingInstruction	443
A.4	ECMAScript Core	443
A.4.1	Array Object	444
A.4.2	Boolean Object	445
A.4.3	Date Object	445
A.4.4	Function Object	452
A.4.5	Global	452
A.4.6	Math Object	454
A.4.7	Number Object	459
A.4.8	Object	461
A.4.9	String Object	461

About This Guide

This guide describes how to use the Designer to create User Application components. It explains how to work with the Provisioning view, the directory abstraction layer editor, the provisioning request definition editor, the provisioning team editor, and the role catalog.

- ♦ Chapter 1, “Introduction to the User Application Design Tools,” on page 13
- ♦ Chapter 2, “Working with the Provisioning View,” on page 17
- ♦ Chapter 3, “Configuring the Directory Abstraction Layer,” on page 43
- ♦ Chapter 4, “Configuring Provisioning Request Definitions,” on page 83
- ♦ Chapter 5, “Creating Forms for a Provisioning Request Definition,” on page 107
- ♦ Chapter 6, “Creating the Workflow for a Provisioning Request Definition,” on page 173
- ♦ Chapter 7, “Workflow Activity Reference,” on page 213
- ♦ Chapter 8, “Working with Integration Activities,” on page 267
- ♦ Chapter 9, “Working with ECMA Expressions,” on page 315
- ♦ Chapter 10, “Configuring Provisioning Teams,” on page 365
- ♦ Chapter 11, “Configuring Roles,” on page 373
- ♦ Chapter 12, “Configuring Resources,” on page 401
- ♦ Appendix A, “ECMAScript Core Reference,” on page 415

Audience

This guide is intended for designers responsible for creating and modifying User Application components.

Feedback

We want to hear your comments and suggestions about this manual and the other documentation included with this product. Please use the User Comments feature at the bottom of each page of the online documentation, or go to www.novell.com/documentation/feedback.html and enter your comments there.

Additional Documentation

For documentation on other Identity Manager features, see the [Identity Manager Documentation Web site](http://www.novell.com/documentation/idm) (<http://www.novell.com/documentation/idm>).

1 Introduction to the User Application Design Tools

This section provides an overview of the tools available for designing and configuring the User Application. Topics include:

- ◆ [Section 1.1, “About the Provisioning View,” on page 13](#)
- ◆ [Section 1.2, “About the Directory Abstraction Layer Editor,” on page 14](#)
- ◆ [Section 1.3, “About the Provisioning Request Definition Editor,” on page 14](#)
- ◆ [Section 1.4, “About the ECMA Expression Builder,” on page 14](#)
- ◆ [Section 1.5, “About the Provisioning Team Editor,” on page 15](#)
- ◆ [Section 1.6, “About the Roles Catalog,” on page 15](#)
- ◆ [Section 1.7, “Documenting a Project,” on page 15](#)

IMPORTANT: The User Application is an application and not a framework. The areas within the User Application that are supported to be modified are outlined within the product documentation. Modifications to areas not outlined within the product documentation are not supported.

1.1 About the Provisioning View

The Provisioning view provides persistent access to Designer’s provisioning, roles, and compliance features. Use the Provisioning view to perform the following actions on provisioning and roles objects:

- ◆ Access the editors that allow you to create and manipulate User Application components, such as:
 - ◆ The directory abstraction layer editor.
 - ◆ The provisioning request definitions editor.
 - ◆ The provisioning editor.
 - ◆ The roles catalog.

Double-clicking an item from the Provisioning view opens the editor for that item.

- ◆ Manipulate object definitions, such as:
 - ◆ Importing and exporting object definitions from the Identity Vault or the local file system.
 - ◆ Validating local object definitions.
 - ◆ Deploying object definitions to the Identity Vault.
 - ◆ Comparing the objects on the local file system with those in the Identity Vault.

- ♦ Define the User Application driver's supported and default locales, including:
 - ♦ Importing and exporting display labels and other User Application strings for localization.
 - ♦ Defining custom localization resource groups (used only for field localization).

1.2 About the Directory Abstraction Layer Editor

The directory abstraction layer editor allows you to define directory abstraction layer definitions. Use the directory abstraction layer editor to modify the User Application's behavior by:

- ♦ Adding new entities (Identity Vault objects).
- ♦ Defining the set of attributes for an entity.
- ♦ Specifying the contents of lists.
- ♦ Modeling relationships among entities.
- ♦ Defining automatic lookups between entities.
- ♦ Defining LDAP searches as Queries that you can run from request and approval forms.

1.3 About the Provisioning Request Definition Editor

The provisioning request definition editor allows you to create custom provisioning request definitions by using a rich set of Eclipse-based design tools. Use the provisioning request definition editor to:

- ♦ Define the basic characteristics of the provisioning request.
- ♦ Design the associated workflow.
- ♦ Define the request and approval forms.
- ♦ Configure the activities and flow paths.

1.4 About the ECMA Expression Builder

Designer incorporates an ECMAScript interpreter and expression editor, which allows you create script expressions that refer to and modify workflow data. For example, you can use scripting to:

- ♦ Create new data items needed in a workflow under the flowdata element.
- ♦ Perform basic string, date, math, relational, concatenation, and logical operations on data.
- ♦ Call standard or custom Java classes for more sophisticated data operations.
- ♦ Use expressions for runtime control to:
 - ♦ Modify or override form field labels.
 - ♦ Initialize form field data.
 - ♦ Customize e-mail addresses and content.
 - ♦ Set entitlement grant/revoke rights and parameters.
 - ♦ Evaluate any past activity data to conditionally follow a workflow path by using the Condition Activity.
 - ♦ Write different log messages that are conditionally triggered by using a single Log Activity.

1.5 About the Provisioning Team Editor

The provisioning team editor allows you to define a set of users who can act as a team within the User Application. The team definition determines who can manage provisioning requests and approval tasks associated with this team. The team definition consists of a list of team managers, team members, and team options. In addition, you can define the set of provisioning request objects that the team can act on.

1.6 About the Roles Catalog

The Roles Catalog includes tools that let you define the contents of the *Roles* tab of the User Application. The tools available through the roles catalog include:

- ♦ **Resource editor:** Defines the set of available resources. Includes information about the resource's trustees, owners, approval workflow, and entitlements.
- ♦ **Role editor:** Defines the set of available roles. Includes information about the role's trustees, owners, role containment hierarchy, and entitlements.
- ♦ **Separation of Duties editor:** Defines the separation of duties constraints and how to handle requests for exceptions to those constraints.
- ♦ **Role Configuration editor:** Lets you modify the roles subsystem administrative settings.

The Roles Catalog also includes a menu option that enables you to import roles defined in a comma-separated values (CSV) file.

1.7 Documenting a Project

Designer provides a document generator that helps you quickly generate customized documentation for your Designer projects. You can define your own document style, but Designer ships with a default provisioning style. The default provisioning style includes sections for the User Application. The sections include:

- ♦ [Section 1.7.1, "Provisioning Locales," on page 15](#)
- ♦ [Section 1.7.2, "Directory Abstraction Layer," on page 15](#)
- ♦ [Section 1.7.3, "Provisioning Request Definitions," on page 16](#)
- ♦ [Section 1.7.4, "Provisioning Teams," on page 16](#)
- ♦ [Section 1.7.5, "Role Catalog," on page 16](#)

1.7.1 Provisioning Locales

Lists the supported locales and default locales along with the provisioning resource groups.

1.7.2 Directory Abstraction Layer

Includes the following sections:

- ♦ **Entities:** Including access properties, auxiliary classes, and LDAP classes.
- ♦ **Global lists:** Including key and display label.
- ♦ **Queries:** Including the query's keys, parameters, and conditions.

- ♦ **Relationships:** Including key, parent key, parent attribute, child key, and child attribute.
- ♦ **Configuration:** Including default entity key, default locale, and container classes.

1.7.3 Provisioning Request Definitions

Includes:

- ♦ A table containing the definition's category, status, and e-mail notification.
- ♦ An image of the workflow's structure.
- ♦ A section for each activity with a table that lists the data mappings for the activity or the expression (if supported by the activity type).
- ♦ A section for each form.

1.7.4 Provisioning Teams

Includes:

- ♦ Display name
- ♦ The team members
- ♦ The request type and scope
- ♦ The manager's permissions

1.7.5 Role Catalog

Includes the following section:

- ♦ **Resources:**
- ♦ **Roles:** Including display name, description, role level, and categories.
- ♦ **Separation of Duties Constraints:** Including display name, description, conflicting roles, approval type, and approvers.
- ♦ **Role Configuration:** Including role removal grace period, role level display names and descriptions, approval types and approval definitions.

2 Working with the Provisioning View

This section provides details on using the Provisioning view. Topics include:

- ♦ [Section 2.1, “Setting Up a Provisioning Project,” on page 17](#)
- ♦ [Section 2.2, “Accessing the Provisioning View,” on page 21](#)
- ♦ [Section 2.3, “Setting Provisioning View Preferences,” on page 23](#)
- ♦ [Section 2.4, “Importing Provisioning Objects,” on page 23](#)
- ♦ [Section 2.5, “Exporting Provisioning Objects,” on page 24](#)
- ♦ [Section 2.6, “Validating Provisioning Objects,” on page 24](#)
- ♦ [Section 2.7, “Deploying Provisioning Objects,” on page 27](#)
- ♦ [Section 2.8, “Comparing Provisioning Objects,” on page 29](#)
- ♦ [Section 2.9, “Specifying Locales and Localization Resource Groups,” on page 30](#)
- ♦ [Section 2.10, “Localizing Provisioning Objects,” on page 35](#)

To perform many of the operations available from the Provisioning view (such as compare, import, and deploy along with the wizards and editors), Designer must be able to establish a connection to the Identity Vault. Designer generates error messages when it cannot connect to the Identity Vault while performing these actions. To ensure that Designer is always able to connect to the Identity Vault, you can choose to save the password when you configure the Identity Vault credentials for your project. When you choose *Save password*, Designer saves the password to the local file system; it is not secure.

2.1 Setting Up a Provisioning Project

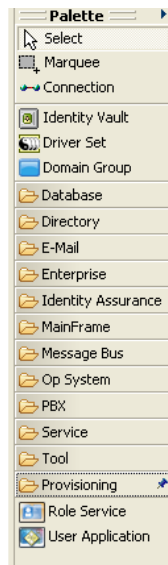
The Provisioning view is only available for Designer projects that contain a User Application driver. After you set up an Identity Manager project and configure an Identity Vault and driver set for the project, you add and configure a User Application driver.

To use Designer to configure the *Roles* tab of the User Application, you must additionally add a Role Service driver to your project. See [Section 2.1.2, “Creating a Role Service Driver,” on page 19](#) after completing [Section 2.1.1, “Creating a User Application Driver,” on page 17](#).


- ♦ [Section 2.1.1, “Creating a User Application Driver,” on page 17](#)
- ♦ [Section 2.1.2, “Creating a Role Service Driver,” on page 19](#)
- ♦ [Section 2.1.3, “Modifying the Role Service Driver Properties,” on page 20](#)
- ♦ [Section 2.1.4, “About E-Mail Notification Templates,” on page 21](#)

2.1.1 Creating a User Application Driver


- 1 In an open Designer project, create a new driver by using one of these methods:
 - ♦ Click *Provisioning* in the *Palette*, then drag a *User Application* icon onto the canvas.



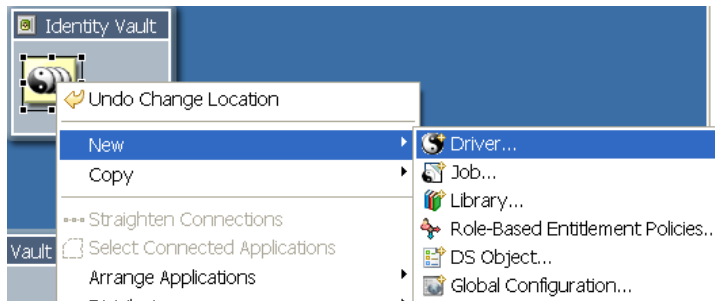- ◆ Right-click the driver set for your project, then select *New > Driver*.



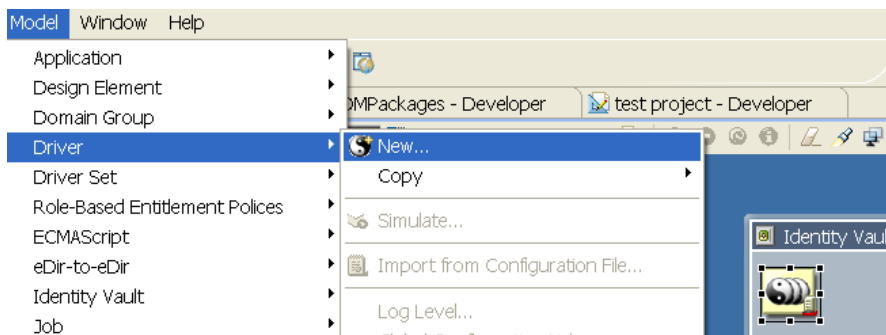- ◆ Click the driver set for your project, then select *Model > Driver > New*.



- 2 Select *User Application Base* from the list of driver base packages in the Driver Configuration Wizard, then click *Next*.
- 3 Use the following information to configure the driver:

Field	Description
Driver Name	Specify the name of an existing User Application driver (the driver specified during the User Application installation), or the name of a new User Application driver.

Field	Description
Authentication ID	Specify the DN of the User Application Administrator.
Application Password	Specify the password for the User Application Administrator (above).
Host	Specify the hostname or IP address of the application server where the Identity Manager User Application is deployed. This information is used: <ul style="list-style-type: none"> ◆ To trigger workflows on the application server to connect to access workflows (terminate, retract, and so on). ◆ To update cached data definitions.
Port	Specify the port for the Host (above).
Application context	Specify context of the User Application context. For example, IDMProv.
Allow Initiator Override	This property applies to workflows that are started automatically. Workflows started automatically are typically started under the Admin identity. Selecting Yes for this property allows those workflows to be started under another user identity. For more information, see the <i>Identity Manager User Application: Administration Guide</i> .

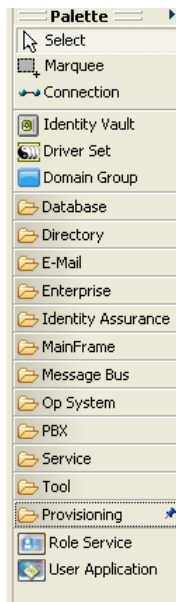
4 Click *Next*.

5 Click *Finish*.

NOTE: When you create a User Application driver, e-mail templates for the User Application are added to the Default Notification Collection. You must explicitly deploy them. They are not deployed by default when you deploy the User Application driver.

2.1.2 Creating a Role Service Driver

- 1 In the same project where you created a User Application driver, click *Provisioning* in the *Palette*, then drag and drop *Role Service* icon onto the Modeler.



- 2 Select *Role and Resource Service Base* from the list of driver base packages in the Driver Configuration Wizard, then click *Next*.
- 3 Specify the name you want to use for the driver and click *Next*.
- 4 Specify the properties you want to use for connecting the driver to the User Application and click *Next*.
- 5 Click *Finish*.

2.1.3 Modifying the Role Service Driver Properties

After creating the Role Service driver, you can optionally modify some of the driver configuration settings and modify the additional settings described in [Table 2-1](#). To customize the additional settings:

- 1 In the Modeler, right-click the Role Service driver and select *Driver > Properties*.
- 2 Select *Driver Configuration* (in the left pane).
- 3 Click the *Driver Parameters* tab.
- 4 Click the *Driver Options* tab. You can modify the driver's properties that you specified when you created the driver as well as the properties described in [Table 2-1](#).
- 5 Click *OK* to save the changes.

Table 2-1 Additional Settings for Customizing the Role Service Driver


Field	Description
Number of days before processing removed request objects	The number of days the driver should wait before cleaning up request objects that have finished processing. This value determines how long you are able to track the status of requests that have been fulfilled.

Field	Description
Frequency of reevaluation of dynamic and nested groups (in minutes)	The number of minutes the driver should wait before reevaluating dynamic and nested groups. This value determines the timeliness of updates to dynamic and nested groups used by the User Application. In addition, this value can have an impact on performance. Therefore, before specifying a value for this option, you need to weigh the performance cost against the benefit of having up-to-date information in the User Application.
Generate audit events	Determines whether audit events are generated by the driver.

2.1.4 About E-Mail Notification Templates

Identity Manager includes a standard set of e-mail notification templates, (see “[Working with E-Mail Templates](#)” in the *User Application: Administration Guide*). When you create a User Application driver, any e-mail notification templates that are missing from the standard set are replaced. However, existing e-mail notification templates, which might come from an earlier version of Identity Manager, are not updated. To replace existing templates with new templates:

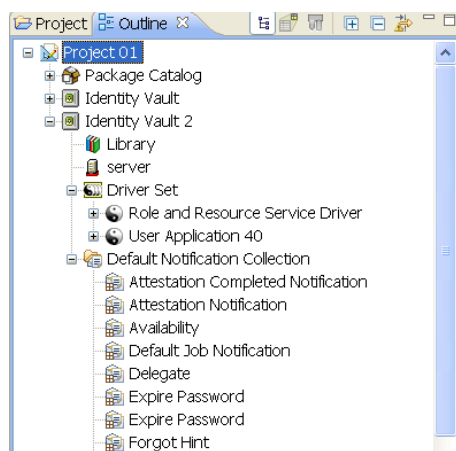- 1 Expand the Outline view.



- 2 In the Default Notification Collection, delete the e-mail notification templates that you want to replace.
- 3 Right-click *Default Notification Collection* and select *Add Default Templates* or *Add All Templates*.
You can also use this command at any time to update e-mail notification templates without creating a new User Application driver.
- 4 To deploy the e-mail notification templates to the Identity Vault, right-click *Default Notification Collection* and select *Live > Deploy*.

2.2 Accessing the Provisioning View


You can access the Provisioning view in the following ways:

- ♦ Select *Window > Show View > Provisioning*.

- In the Modeler window, right-click the User Application, then select *Show Provisioning View*.
- In the Outline view, right-click the User Application, then select *Show Provisioning View*.




When it is open, the Provisioning view displays all of the provisioning projects located in the same workspace. The contents of the view depend on what version of the User Application driver you selected when you created the project.

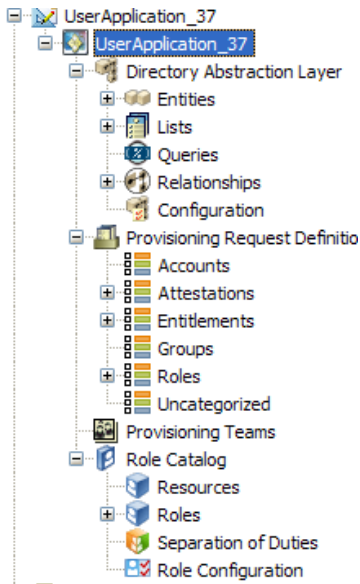Figure 2-1 Sample Provisioning View




The Provisioning view displays icons to indicate the object's status. The icons are described in [Table 2-2](#).

Table 2-2 Provisioning View Status Icons

Icon	Description
	Indicates that the local object has changed.
	Indicates that the local object contains a validation warning.
	Indicates that the local object contains a validation error.

The User Application driver icon includes a tooltip that provides the project's Identity Vault name, the DriverSet, the driver name, and the version. [Figure 2-2](#) shows an example of the tooltip for a Version 3.5 User Application driver.

Figure 2-2 User Application Driver Tooltip



TIP: If you do not see the User Applications that you expect, it might be because the project is corrupt. If your project is corrupt, you must re-create it.

2.3 Setting Provisioning View Preferences

You can customize some Provisioning view behaviors by setting preferences. You access the preferences page through *Windows > Preferences > Novell > Provisioning*. For more information, see “Provisioning” in the “Setting Preferences” chapter of the *Designer 4.0.2 for Identity Manager 4.0.2 Administration Guide*.

2.4 Importing Provisioning Objects

The Provisioning view’s import feature lets you import provisioning objects in different ways.

- ◆ [Section 2.4.1, “Importing from a Driver Configuration File,” on page 23](#)
- ◆ [Section 2.4.2, “Importing from an Identity Vault,” on page 23](#)

This feature is useful when you begin a new project based on one or more definitions from an existing project, or when you want to share definitions with other developers working on the same project.

NOTE: When you change the Identity Vault or driver set’s deploy context, you must save the project before performing an import. If you do not save the change, Designer continues to use the old deploy context for import operations.

2.4.1 Importing from a Driver Configuration File

To import objects from a driver configuration file:

- 1 Open the Provisioning view.
- 2 Select the root node representing the type of object you want to import.
- 3 Right-click the container and select *Import from File*. Confirm the import operation (which might overwrite existing definitions of the same name) by clicking *OK*.
- 4 Specify the name of the driver configuration file you want to import, then click *OK*.

Trustee information is stored in the driver configuration file. When you import a driver configuration file using Designer, the trustee information is processed as expected. If you import the driver configuration file using iManager, the trustee information is ignored.

2.4.2 Importing from an Identity Vault

- 1 Open the Provisioning view and select the container into which you want to import the definitions.

To import a specific provisioning object, select that node in the Provisioning view. To import all objects of a specific type, select the root node representing that type.

- 2 Right-click the container and select one of the following:
 - ◆ *Live > Import* to import the contents of the currently selected container.

- ♦ *Live > Import Object* to browse the Identity Vault and select the object to import.
- ♦ *Live > Import From* to browse the Identity Vault and select a container whose contents you want to import objects from.

If prompted, provide the Identity Vault credentials and click *OK*.

NOTE: For provisioning teams, *Import Object* imports only the team object. *Import Team Requests* imports any associated team request objects.

- 3 Navigate to the Identity Vault container or object that you want to import and click *OK*.
- 4 Review the Import Summary page to determine how you want to proceed. To complete the import, click *Import*, or click *Cancel*. If you click *Import*, Designer performs the operation and displays a summary of the completed operation.

2.5 Exporting Provisioning Objects

The Provisioning view's export feature allows you to move project components from one project to another without re-creating the contents. It also allows you to clone a project. You can use it to export provisioning objects (and their children) to an XML-based driver configuration file. You use the resulting file as the input to the Import from File feature, enabling you to easily share the contents of your provisioning project with other developers.

To export to a driver configuration file:

- 1 Open the Provisioning view and select the object containing the definitions to export.
To export a specific provisioning object, select that node in the Provisioning view. To export all of the objects of a specific type, select the root node representing that type.
- 2 Right-click the container or object and select *Export to File*.
- 3 Provide the name and location of the file to generate, then click *OK*.
The default name for the file reflects the contents of the file. For example, if you export lists, the default name for the file is `lists.xml`. You can change the name as needed.

2.6 Validating Provisioning Objects

The Validation feature allows you to validate provisioning objects on the local file system before you deploy. The validation runs Designer's project checker and displays the results in the Project Checker view.

You can validate provisioning objects individually, by node (such as the directory abstraction layer, a provisioning team, or a separation of duty constraint), or at the User Application driver level. Each node (individual, container-level, or driver-level) has a right-click menu item called *Validate*. In addition, when you open an object in the editor, you can access the *Validate* option, for that item, from Designer's main menu and toolbar. For example, if you have a provisioning request definition open in the editor, the main menu and toolbar provides a *PRD > Validate* menu option.

NOTE: Validation does not check the Identity Vault for the existence of any object.

Each object type has unique validation rules. They are described in each of the following sections:

- ♦ [Section 2.6.1, "Directory Abstraction Layer Objects," on page 25](#)
- ♦ [Section 2.6.2, "Provisioning Request Definitions," on page 25](#)
- ♦ [Section 2.6.3, "Provisioning Teams," on page 25](#)

- ♦ [Section 2.6.4, “Role Configuration Objects,” on page 26](#)
- ♦ [Section 2.6.5, “Roles,” on page 26](#)
- ♦ [Section 2.6.6, “Resources,” on page 26](#)
- ♦ [Section 2.6.7, “User Application Driver Locales,” on page 27](#)

2.6.1 Directory Abstraction Layer Objects

Designer does the following:

- ♦ Verifies that the XML is well-formed and complies with the schema that defines the elements needed for entities, attributes, lists, relationships, and so on.
- ♦ Checks every entity to ensure that references to other entities and global lists are valid.
For example, when validating an entity and its attributes, the validator checks that all references to other entities via the Edit Entity, DNLookup, and Detail Entity references exist.
- ♦ Ensures that every entity has at least one attribute defined.
- ♦ Ensures that every local and global list contains at least one item.

2.6.2 Provisioning Request Definitions

Designer does the following:

- ♦ Validates that every Provisioning Request Definition has at least one request form and one approval form.
- ♦ Ensures that the Condition Activity has both an outbound true flow path and an outbound false flow path.
- ♦ Ensures that the Entitlement Activity Data Item Mapping for DirXML-Entitlement-DN is valid.
- ♦ Ensures that the Final Timeout Action property (for User Activities) has a matching flow path link leading from the activity. For example, if Final Timeout Action=denied, there must be a denied link.
- ♦ For Branch and Merge activities, ensures that a workflow has an equal number of Branch and Merge activities. It also ensures that all paths descending from a Branch activity merge into one Merge activity, that all merge activities have a branch activity, and that all Merge activities have a branch-activity-id attribute.
- ♦ Ensures that static list keys contain the correct data for the decimal data type.

2.6.3 Provisioning Teams

Designer does the following:

- ♦ Validates that managers and members have been defined for the team.
- ♦ Validates that team requests are specified for the team.
- ♦ If the request scope is Categories, it validates that the team request actually references a category.

2.6.4 Role Configuration Objects

Designer does the following:

- ◆ Ensures that the *Quorum* value should be a number between 0 and 100. Validation rules take into consideration that a percentage can be entered.
- ◆ Ensures that the *Removal Grace Period* is a positive number.
- ◆ Ensures that Display Names and Descriptions use supported locales.
- ◆ Ensures that the Provisioning Request Definitions defined for the Role Approval and SoD Conflict Approvals are valid, are not templates, and whose process types match properly.
- ◆ Separation of Duties (SoD) approvers must exist and be valid.

2.6.5 Roles

Before deployment, Designer validates that:

- ◆ The category exists.
- ◆ The description is provided for all supported languages.
- ◆ The Quorum is a valid expression.
- ◆ Approvers are present when the approval type is set to standard serial or parallel.

On deploy, Designer validates that the following objects exist in the Identity Vault:

- ◆ The entitlement
- ◆ The owner
- ◆ The Role Trustees
- ◆ The lower-level roles
- ◆ Groups
- ◆ Containers
- ◆ Approvers
- ◆ Provisioning request definition

2.6.6 Resources

Before deployment, Designer validates that:

- ◆ The category exists.
- ◆ The description is provided for all supported languages.
- ◆ The Quorum is a valid expression.
- ◆ Approvers are present when the approval type is set to standard serial or parallel.

On deploy, Designer validates that the following objects exist in the Identity Vault:

- ◆ The owner
- ◆ The Resource Trustees
- ◆ Approvers
- ◆ Provisioning request definition

2.6.7 User Application Driver Locales

For the User Application driver locales, Designer ensures that the locales contain descriptions and display names. You can turn off the validation of display names for each locale by setting a preference. For more information, see [Section 2.3, “Setting Provisioning View Preferences,” on page 23](#).

2.7 Deploying Provisioning Objects

The Provisioning view’s Deploy feature deploys your provisioning objects to the specified User Application driver. You must deploy any changes you’ve made to the provisioning objects in the design environment before you see them reflected in the Identity Manager User Application. The Provisioning view allows you to deploy a container and all its children (for example, all entities or all lists), or to deploy just a single provisioning object (such as a single list element). When you select an item to deploy, Designer compares it to the same item in the Identity Vault. If the items are equal, Designer prevents you from deploying. When there are differences, Designer displays them and allows you to proceed or to cancel the deployment.

NOTE: When you change the Identity Vault or driver set’s deploy context, you must save the project before performing a deploy. If you do not save the change, Designer continues to use the old deploy context for deploy operations.

Deployment and Versions

If you deploy a Version 4.0 User Application driver and the Identity Vault does not contain the necessary 4.0 schema changes, the provisioning objects are not deployed and Designer displays an error message in the Deploy Results dialog box. This is to prevent you from deploying a 4.0 driver to a 3.0 Identity Vault.

2.7.1 Deploying Provisioning Objects

- 1 Save any changes.

If the objects contain unsaved changes, Designer displays the unsaved definitions and prompts you to save them. If you do not, Designer still deploys the objects but does not deploy the unsaved changes. Choosing not to save the changes does not cancel the deployment.

- 2 Open the Provisioning view, right-click the object to deploy, then select *Live > Deploy* or *Live > Deploy All*.

To deploy a specific provisioning object, select that node in the Provisioning view. To deploy all of the objects of a specific type, select the root node representing that type.

Designer prompts you for Identity Vault credentials (if necessary), validates the objects, and writes any messages to the project checker view.

When you deploy a *driver* that contains provisioning objects that fail validation, Designer deploys the driver but not the invalid objects (regardless of the deployment preferences). Designer displays the errors in the deployment result dialog box.

When you deploy a *provisioning object* that contains validation errors, Designer performs the deployment based on the defined preferences and writes the errors to the Project Checker view.

- ♦ [“Tips for Deploying Provisioning Request Definitions” on page 28](#)
- ♦ [“Deploying Roles” on page 28](#)


Tips for Deploying Provisioning Request Definitions

- ♦ If errors associated with activities are detected during deployment of a provisioning request definition, Designer identifies the activity in which the error occurred by activity Id. However, in the user interface, Designer by default displays activities by activity name. To make it easier to identify the activity in an error message, turn on the display of activity Ids before you deploy the provisioning request definition. To turn on the display of activity Ids, right-click the Workflow canvas and select *Show Activity Ids*.
- ♦ A common error occurs when you fail to replace a placeholder expression in an entitlement provisioning activity. If this is the case, correct the error, then deploy the provisioning request definition again.
- ♦ Designer cannot evaluate expressions at design time, so it might display a warning when you use an expression for an entitlement that must be resolved at runtime. This is not a fatal error and the deployment will succeed.
- ♦ Make sure that the *Status* is *Active* (in the *Overview* tab).
- ♦ If a provisioning request definition with the same CN already exists in the Identity Vault, the Deployment Summary displays the differences. You can review the differences before you decide to proceed.

Deploying Roles

Because roles can be related through a role hierarchy, Designer notifies you, on deploy, if the role you are deploying contains any dependent roles. To ensure that roles in the Identity Vault are in a valid state, Designer requires that you deploy the role and any dependent roles at the same time by displaying them in the dialog box shown in [Figure 2-3 on page 28](#).

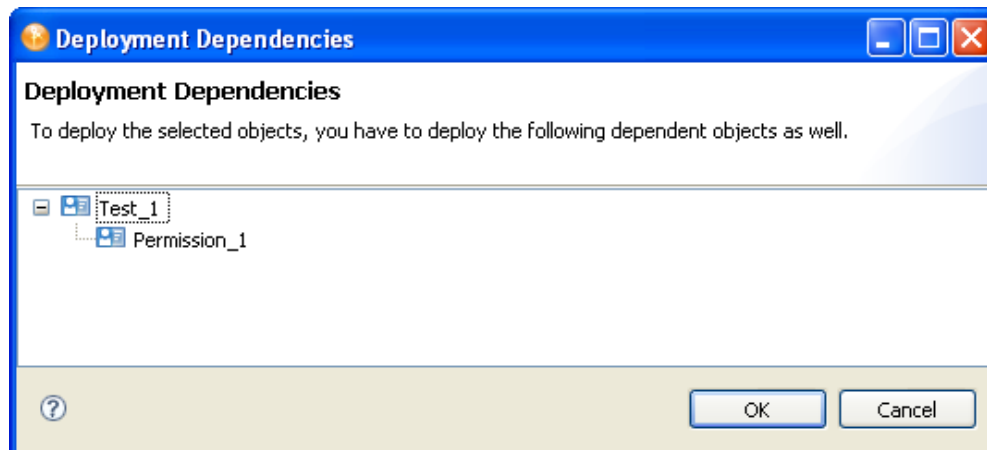Figure 2-3 Deploying Dependent Roles



2.7.2 Testing the Deployed Changes

You can access the User Application from within Designer to view or test what you deploy:

- 1 Select *Tools > Access User Application*.
- 2 Choose the project and User Application driver container associated with the User Application you want to view, then click *OK*.

Designer uses the driver configuration information that you defined for the project to make the connection. Designer uses the browser settings specified in *Windows > Preferences > General > Web Browser*

2.8 Comparing Provisioning Objects

The Provisioning view's Compare feature allows you to see the differences between the provisioning objects in the local file system and those that are running in the deployed User Application driver. When Designer encounters a difference, it allows you to specify what action you want to take on that difference. You can ignore or reconcile it.

NOTE: When you change the Identity Vault or driver set's deploy context, you must save the project before performing a compare. If you do not save the change, Designer continues to use the old deploy context for compare operations.

To compare provisioning objects:

- 1 Right-click a container or object in the Provisioning view, then select *Live > Compare*.
- 2 If prompted, provide Identity Vault credentials, then click *OK*.

Designer displays the results of the comparison. By default, only the differences are displayed, but you can show the full comparison by deselecting *Only show differences*.

NOTE: For provisioning teams, you must select the container to compare the provisioning request and provisioning team objects. If you select an individual team, it compares only the provisioning team objects.

- 3 If there are differences, select one of the following actions:

Reconcile Status	Description
Do not reconcile	Do not change any definitions.
Update Designer	Import the definitions from the Identity Vault.
Update eDirectory	Deploy the definition from Designer to the Identity Vault.
Reconciled by parent	For informational purposes. Specifies whether one of the parent objects is already being reconciled. It is always disabled and is only set if the parent object is already being reconciled to Designer or the Identity Vault.

If a provisioning request definition or role object contains trustees, the trustees for the local object are compared with the trustees defined for the object in the Identity Vault. Trustees are not compared for directory abstraction layer objects.

2.9 Specifying Locales and Localization Resource Groups

- Section 2.9.1, “Specifying the Default Locale,” on page 30
- Section 2.9.2, “Defining the User Application’s Supported Locales,” on page 30
- Section 2.9.3, “Creating a Custom Localization Resource Group,” on page 32

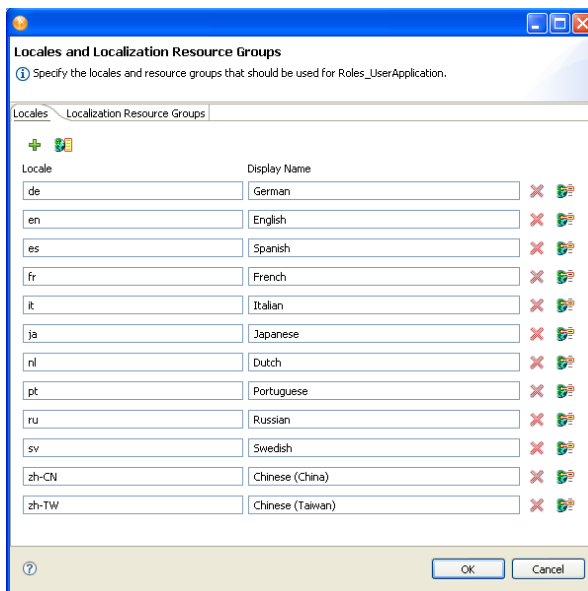
2.9.1 Specifying the Default Locale

To specify the User Application driver’s default locale:

- 1 Right-click the User Application driver in the Provisioning view, then select *Configure > Default Locale*.
- 2 Select the locale from the drop-down list box, then click *OK*. If you do not see the locale in the list, you must add it through the Locales dialog box.

2.9.2 Defining the User Application’s Supported Locales

- 1 Right-click the User Application driver in the Provisioning view, then select *Configure > Locales*. Designer displays the Supported Locales dialog box.



Button	Description
--------	-------------



Lets you add a new locale to the list of locales supported by the User Application driver. When you click the *Add* button, Designer prompts you for the Language and Country. You can either select them or type a value. The Language is required and displays as the locale. The country is not required.

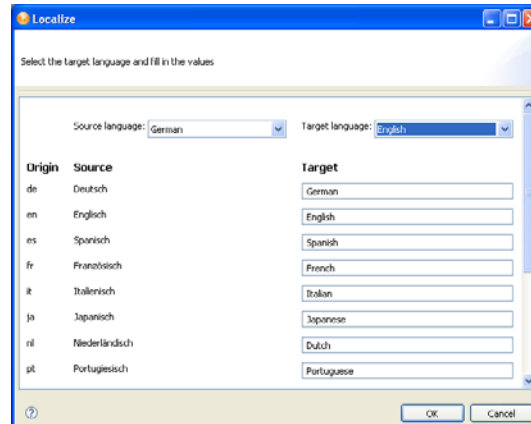


Deletes the selected Locale from the supported list. Any files for the selected locale are not deleted.

Button**Description**




Lets you localize all supported locales in one dialog box. When you click the button, it launches this dialog box:





You can select the source language from which you want to translate the names of the supported locales. Select the target language into which you want to translate the names of the supported locales. Type the translation in the *Target* field.




Lets you localize the display labels for the selected locale. This is the same procedure described in [Section 2.10, “Localizing Provisioning Objects,” on page 35](#).

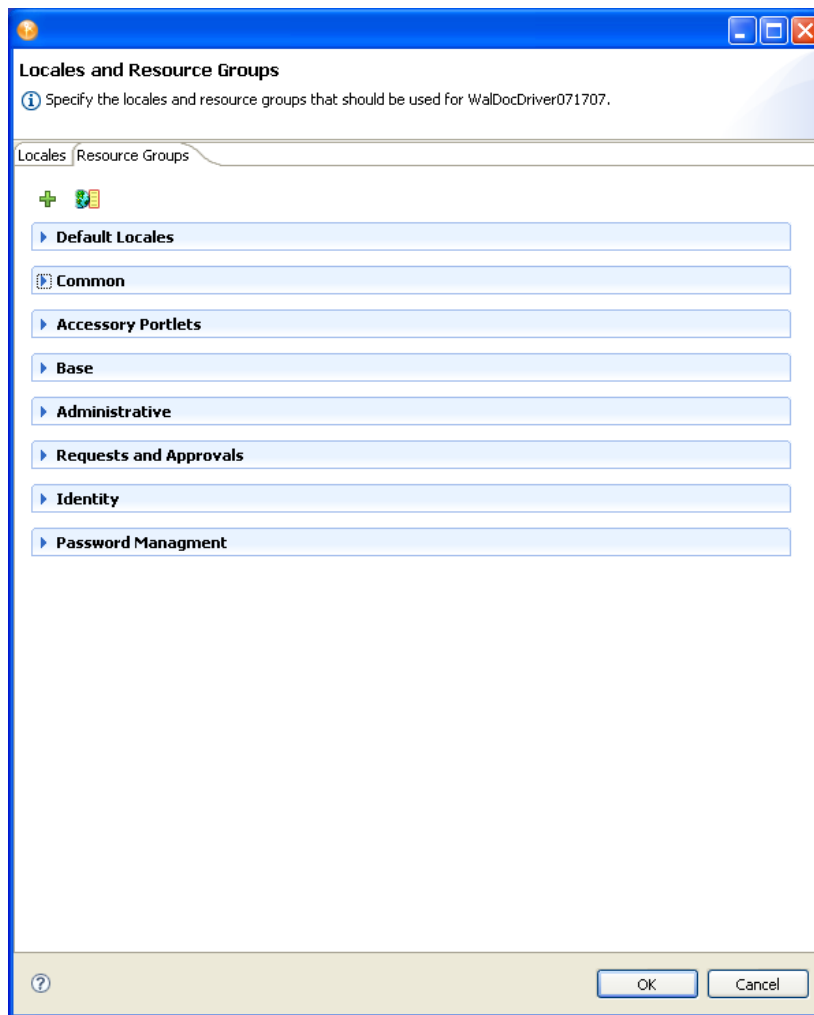- 2 Click , then select the Language and optionally the Country from the drop-down list, or type the value. The language is required, but the country is not. The language is displayed as the Locale in the Supported Locales dialog box.
- 3 Click *OK*.
- 4 Click *Resource groups*, then click the localization resource group that you want to support the new locale.




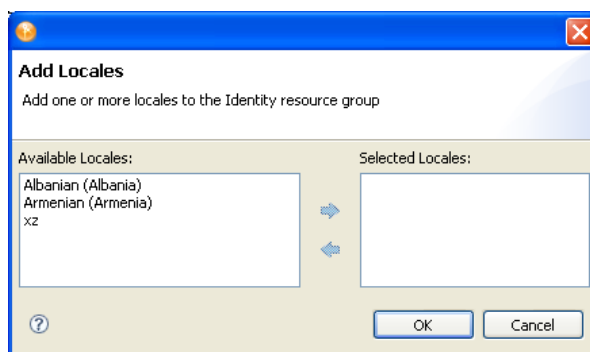- 5 Click  in the Locales area, then select the locale from the *Available Locales* list and move it to the Selected Locales list, then click *OK*.




2.9.3 Creating a Custom Localization Resource Group

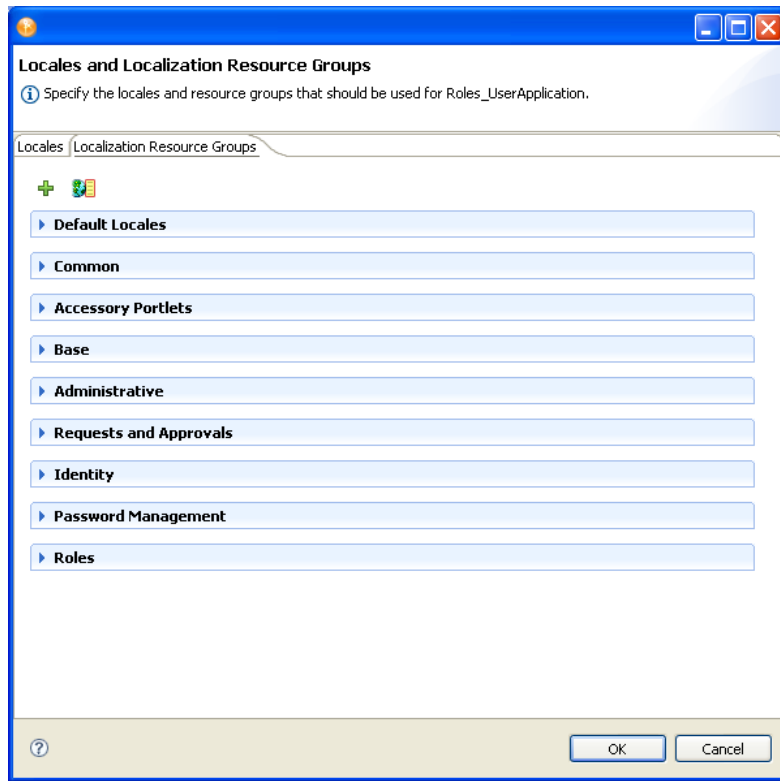- 1 Right-click the User Application driver in the Provisioning view, then select *Configure > Locales*. Go to the *Localization Resource Groups* tab.




2 Click .

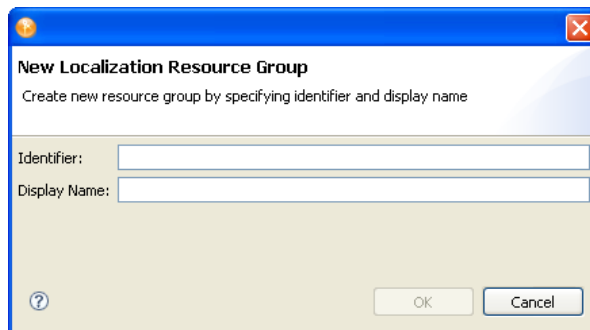




3 Complete the fields as follows:

Field	Description
Identifier	A unique name used to identify the localization resource group.
Display Name	The name displayed in Designer to correspond with this group.

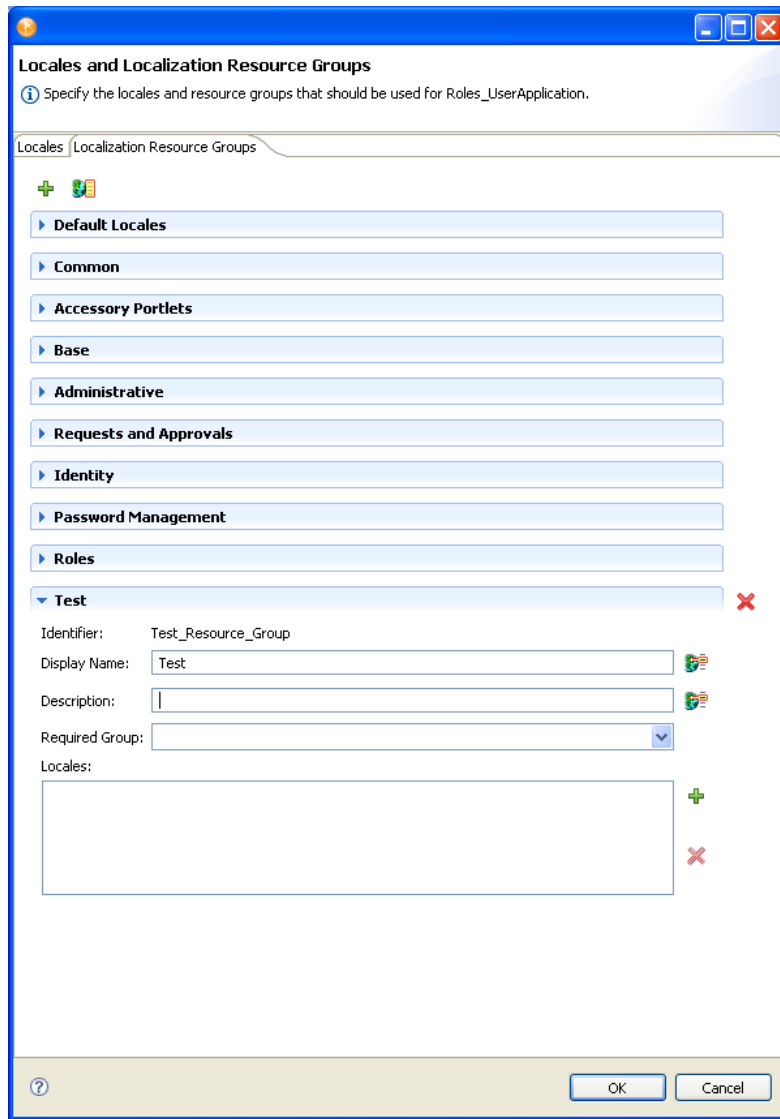4 Click **OK**. The Localization Resource Groups property dialog box displays:



5 Complete the fields as follows:

Button	Description
	Lets you add a new localization resource group.
	Deletes the current localization resource group.
	Lets you localize the localization resource groups in one dialog box.
<i>Description</i>	Lets you add descriptive text for this entry.
<i>Required Group</i>	Lets you specify dependencies on other localization resource groups. Localization resource groups are used for creating resource bundles for non-standard language. The required groups are defined in the <i>User Application: Localization Toolkit Guide</i> . Contact your Novell Sales Representative for more information about the toolkit.

Button	Description
<i>Locales</i>	Lets you add or remove the locales into which this localization resource group must be localized. If the locale is not on the list, see “To specify the User Application driver’s default locale:” on page 30.

2.10 Localizing Provisioning Objects

- ◆ [Section 2.10.1, “Using Designer to Localize,” on page 36](#)
- ◆ [Section 2.10.2, “Supported Languages,” on page 37](#)
- ◆ [Section 2.10.3, “Exporting and Importing Data to Localize,” on page 37](#)

Designer allows you to translate the names and descriptions of provisioning objects into multiple languages. [Table 2-3](#) describes the types of provisioning objects that you can translate.

Table 2-3 *Localizable Objects*

Designer Tool	Description
Directory Abstraction Layer Editor	<ul style="list-style-type: none"> ◆ Entity and attribute display labels ◆ Relationship names ◆ Global and local list items ◆ Query display labels and parameter display labels
Provisioning Request Definition Editor	<ul style="list-style-type: none"> ◆ Activity properties that are displayed to the user ◆ Form properties that are displayed to the user
Provisioning Team Editor	<ul style="list-style-type: none"> ◆ Provisioning team display name and descriptions
Roles Catalog	<ul style="list-style-type: none"> ◆ Resource display label and description ◆ Role display label and description ◆ Separation of Duties display label and description ◆ Role level display label and description

To localize the provisioning objects listed in [Table 2-3](#):

- 1 Verify that the locale (or language) is supported by the User Application driver. See [Section 2.10.2, “Supported Languages,” on page 37](#) for the list of languages supported by default.
- 2 If necessary, add the new locale (or language) to the User Application driver and to the resource groups. For more information, see [Section 2.9.2, “Defining the User Application’s Supported Locales,” on page 30.](#)
- 3 Translate the names and descriptions in one of the following ways:
 - 3a Directly within Designer.

NOTE: You cannot edit the provisioning request definitions in the Attestation category. For this reason, you cannot use this method for localizing them. You must use the method described in [Step 3b](#).

For more information, see [Section 2.10.1, “Using Designer to Localize,” on page 36.](#)

- 3b By exporting the set of localizable objects into an external properties or XML file, translating the contents of the file, then importing the data back into the project.

For more information, see [Section 2.10.3, “Exporting and Importing Data to Localize,”](#) on page 37).

2.10.1 Using Designer to Localize

- 1 Click the localize button.



When you click this button, Designer displays a dialog box that lets you add the localized text. This is an example of the Localization dialog box.



The languages displayed in this dialog box are the languages currently supported by the User Application driver. If your language is not shown in this dialog, you must add it. For more information, see [Section 2.9.2, “Defining the User Application’s Supported Locales,”](#) on page 30.

The directory abstraction layer editor provides multiple ways to localize data. You can access the localization dialog boxes in these ways:

Table 2-4 Accessing the Localization Dialog Boxes

To define the localization text for...	Perform this action...
Every localizable item in the directory abstraction layer	Select <i>DAL > Set Global Localization</i> . or Click <i>Set Global Localization</i> (from the editor's toolbar), then select the <i>Target Language</i> before entering the localized text in the <i>Target</i> field.
A specific entity, relationship, or list	From the tree view, right-click the object to localize, select <i>Localize</i> , then select the <i>Target Language</i> before entering the localized text in the <i>Target</i> field.
A single display label	Select a specific entity or attribute, then click <i>Localize Display Label</i> (beside the <i>Display Label</i> field in the Property pane).

2.10.2 Supported Languages

You can localize the display labels, display names, and descriptions into the languages listed in the localization dialog box. This list represents the languages (locales) supported by the User Application driver. For information about adding new languages to this list, see [Section 2.9, “Specifying Locales and Localization Resource Groups,”](#) on page 30.

The locale configuration is stored in the driver's `<default-locale>` element in the `AppConfig.AppDefs.locale-configuration` XMLData attribute.

You *must* provide a display label for the User Application driver's default language, or the User Application generates the following runtime error: `The resource resolver com.novell.soa.common.i18n.LocalizedMapResolver did not return a resource for the default locale of <locale>. It is required that a resource exist for the default local.`

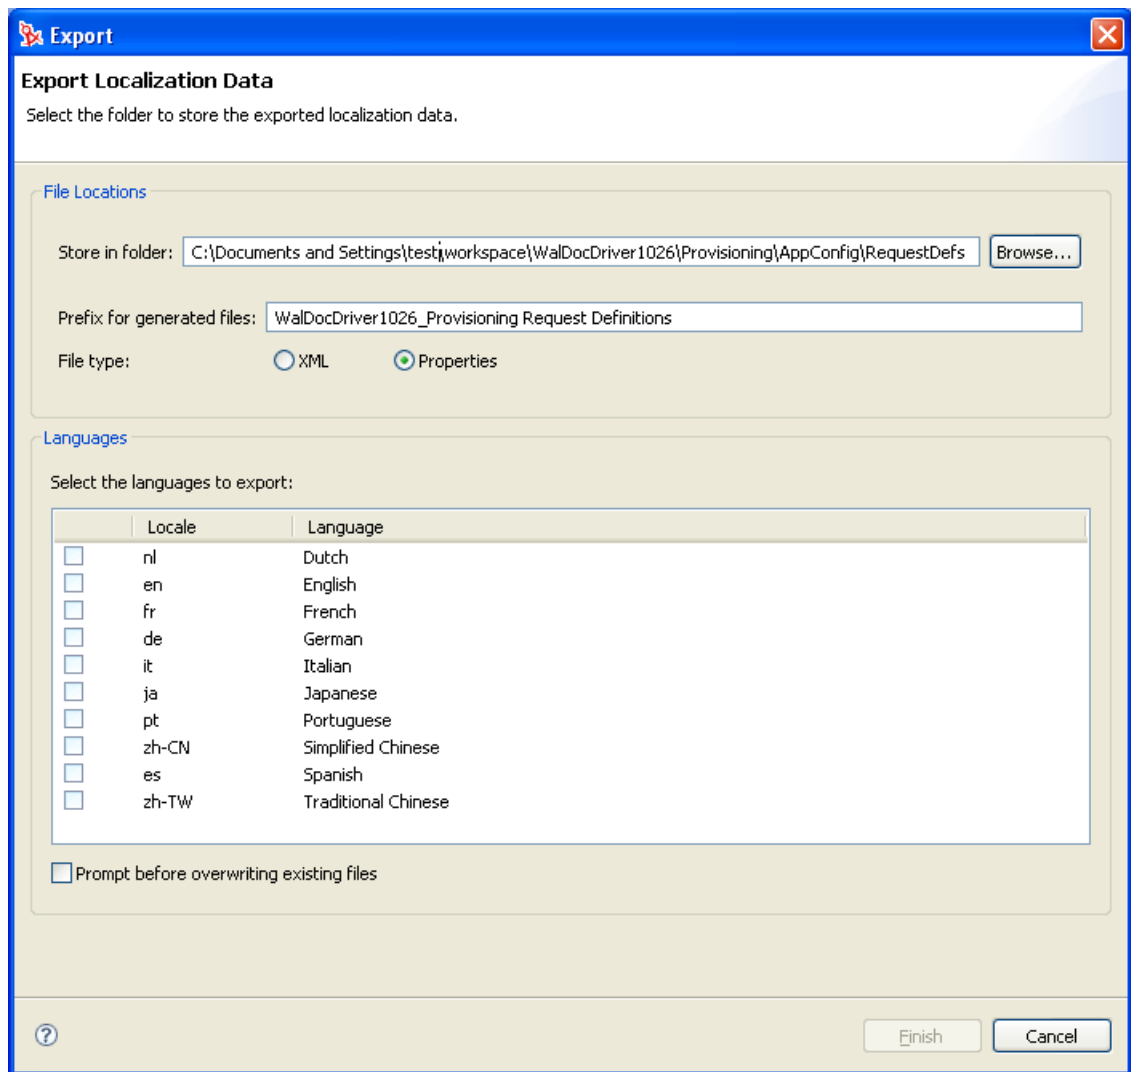
2.10.3 Exporting and Importing Data to Localize

You can export the localizable data (such as display names and descriptions) in your project to an XML or properties file. After the data in that file is translated, you can import it back to the Designer project. You can export an entire driver, one object, or a subset of objects.

- ♦ [“Exporting Data to Localize”](#) on page 37
- ♦ [“Importing Localized Files”](#) on page 39

Exporting Data to Localize

- 1 Right-click a container node or an object in the Provisioning view.
- 2 Select *Localize > Export Localization Data*.




3 Fill in the fields as follows:

Field	Description
<i>Store in folder</i>	Specify the name of a local folder where the exported files should be written.
<i>Prefix for generated files</i>	Specify a prefix for the generated files. Determine a naming strategy so you are able to identify the files for projects.
<i>File Type</i>	Select <i>XML</i> or <i>Properties</i> depending on the encoding or format you prefer. XML files are UTF-8 encoded. Properties use Unicode*.
<i>Select the languages to export</i>	Select the languages you want localizations for. A file containing the display label key is generated for that language. The localizations need to be added to this file in the proper format so you can import them to the proper User Application driver objects.
<i>Prompt before overwriting existing files</i>	If this option is selected, Designer prompts you before it overwrites any existing files of the same name in the target directory.

- 4 Click *Finish*. Designer displays a message describing the result of the export operation and the location of the exported data.

Importing Localized Files

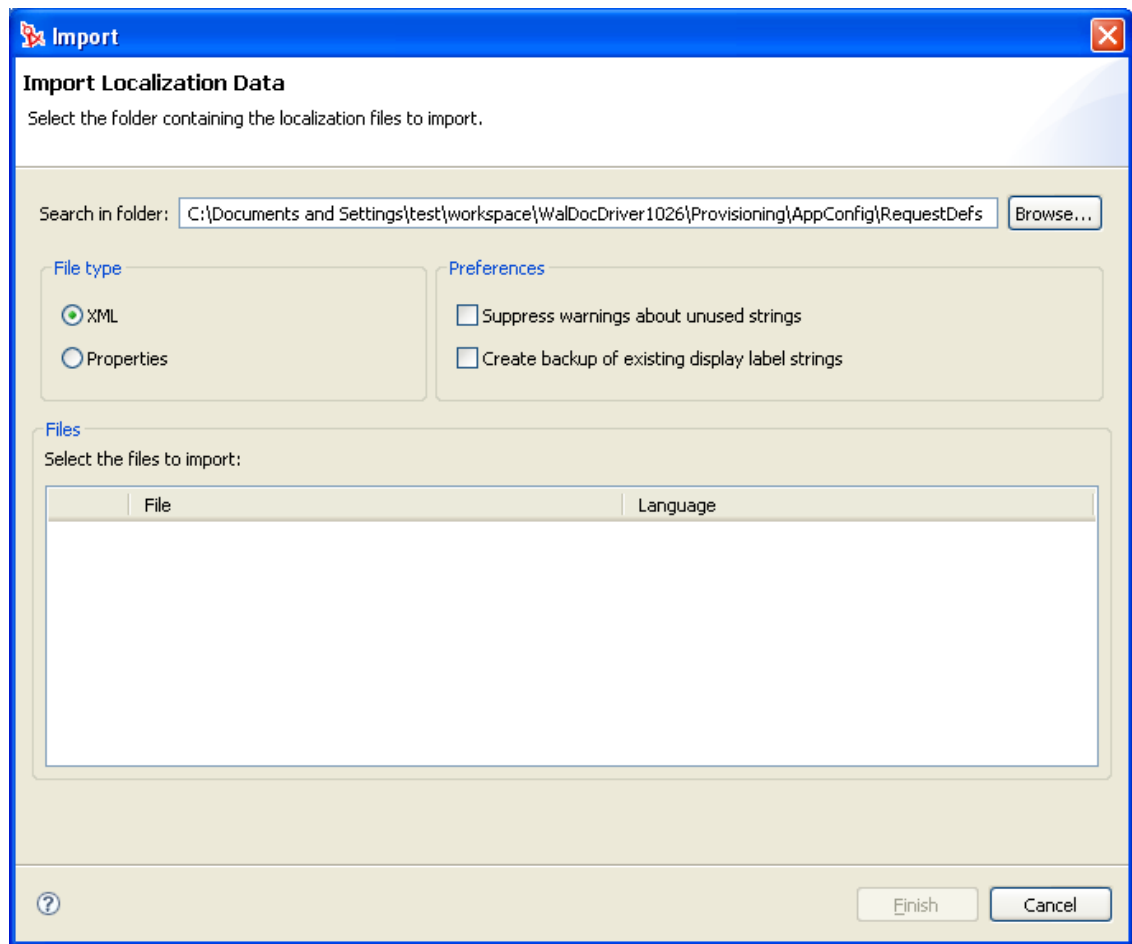- 1 Right-click a container node or an object in the Provisioning view, then select *Localize > Import Localization Data*.



2 Fill in the fields as follows:

Field	Description
<i>Search in folder</i>	Specify the folder location where the files to import are located.
<i>File Type</i>	Select <i>XML</i> if the file you want to import is in XML format. Select <i>Properties</i> if the file you want to import is in the properties format.
<i>Preferences</i>	Select <i>Suppress warnings about unused strings</i> if you want the wizard to suppress warning messages. Select <i>Create backup of existing display label strings</i> if you want the wizard to create a backup of the existing strings before the import. Useful in case you need to revert.
<i>Files</i>	Select the files to import. This table is populated with the files from the folder location and file type specified above. If it is blank, no files of the specified type are located in the target folder. The wizard attempts to determine the language by looking at the filename. If the name cannot be determined, it defaults to English. You can change the <i>Language</i> column if the wizard assumes the wrong language. The wizard changes the filename to reflect the language you specify and import the display labels to the corresponding language.

- 3 Click *Finish* to complete the import. Designer displays a status dialog box that describes the results including any errors reading the files and any warnings about display label keys that are unused.

3 Configuring the Directory Abstraction Layer

This section provides details on configuring the directory abstraction layer. Topics include:

- ♦ [Section 3.1, “About the Directory Abstraction Layer,” on page 43](#)
- ♦ [Section 3.2, “Working with Entities and Attributes,” on page 47](#)
- ♦ [Section 3.3, “Working with Lists,” on page 54](#)
- ♦ [Section 3.4, “Working with Queries,” on page 57](#)
- ♦ [Section 3.5, “Working with Relationships,” on page 61](#)
- ♦ [Section 3.6, “Working with Configuration Settings,” on page 64](#)
- ♦ [Section 3.7, “Directory Abstraction Layer Property Reference,” on page 65](#)

3.1 About the Directory Abstraction Layer

The directory abstraction layer is a set of XML-based files that define a logical view of an Identity Vault for the User Application. The User Application uses the directory abstraction layer definitions to determine:

- ♦ The Identity Vault objects and attributes that the User Application can display or modify.
- ♦ How the User Application displays Identity Vault data.
- ♦ The relationships the User Application can display.
- ♦ The provisioning request categories, e-mail notification types, and delegate relationships the User Application can display.

The User Application ships with a default set of entities, relationships, and lists that it needs to function, but you can add new or modify existing directory abstraction layer objects to customize the User Application for your own business needs. You use the directory abstraction layer editor to define the contents of the directory abstraction layer.

- ♦ [Section 3.1.1, “Analyzing the User Application’s Data Needs,” on page 44](#)
- ♦ [Section 3.1.2, “About the Directory Abstraction Layer Editor,” on page 44](#)
- ♦ [Section 3.1.3, “About Directory Abstraction Layer Editor Files,” on page 46](#)

3.1.1 Analyzing the User Application's Data Needs

Before you make changes to the directory abstraction layer objects, analyze how you want to display your Identity Vault data in the User Application. Consider:

- ◆ What parts of the Identity Vault you want to make available to the User Application.

For example, what objects do you want your users to be allowed to search and display? Check this list against the base set of abstraction layer definitions to determine if you need to add any new objects.
- ◆ What is the structure of your Identity Vault schema? Have you added custom extensions and auxiliary classes?
- ◆ What is the structure of your data?
 - ◆ What is required and what is optional?
 - ◆ What validation rules are in place?
 - ◆ What are the relationships between objects (DN references)?
 - ◆ How are the attributes defined? (For example, an attribute that represents a phone number might be multi-valued for home, office, and cell phone numbers)
- ◆ Who sees the data? Is the User Application available as a public or private site?

Use the information about your data needs to map your Identity Vault objects to abstraction layer entities.

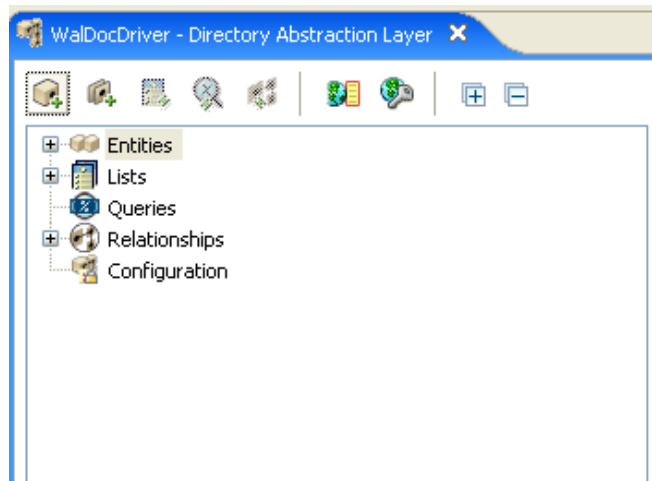
3.1.2 About the Directory Abstraction Layer Editor

The directory abstraction layer editor is a graphical tool for defining the directory abstraction layer files. When you add a User Application driver to an Identity Manager project and run the configuration wizard, Designer creates an initial set of directory abstraction layer files. If you do not run the configuration wizard, the initial files are not created. These base files are displayed when you start the directory abstraction layer editor.

To start the directory abstraction layer editor:

- 1 Open the *Provisioning view* and double-click the *Directory Abstraction Layer* node.

Designer displays the directory abstraction layer tree containing nodes for *Entities*, *Lists*, *Queries*, *Relationships*, and *Configuration*.











Node	Description
<i>Entities</i>	<p>Entities represent the Identity Vault objects available to the User Application. There are two types of entities:</p> <ul style="list-style-type: none"> ◆ Entities mapped from the schema: Entities that represent Identity Vault objects directly exposed to users via the User Application. Users can typically create, search, and modify the attributes of these entities. ◆ Entities representing LDAP relationships: Called DN lookups, these entities represent indexed searches and are used to support particular types of attributes in the User Application. DN lookup entities provide information about relationships between LDAP objects. DN lookup entities are: <ul style="list-style-type: none"> ◆ Used by the Org Chart portlet to determine relationships. ◆ Used in the Search List, Create, and Detail portlets to provide selection lists and DN contexts. ◆ Available to the workflow request and approval flow forms you define using the provisioning request definition editor.
<i>Lists</i>	<p>Defines the contents of global lists. Global lists are:</p> <ul style="list-style-type: none"> ◆ Associated with an attribute. The User Application displays the attribute values as a drop-down list in the User Application. ◆ Used to display Resource Request categories.
<i>Queries</i>	<p>Lets you define LDAP search criteria that can be run from a workflow form.</p>
<i>Relationships</i>	<p>Lets you map hierarchical relationships among schema-based entities. Used by the Organization Chart action of the <i>Identity Self-Service</i> tab of the User Application and in iManager when defining provisioning s.</p>
<i>Configuration</i>	<p>General configuration parameters.</p>

- 2 Use the left pane to navigate the directory abstraction layer nodes. When you select an item in the left pane, the right pane displays the properties for the selection.
- 3 Use the right pane to define the properties for the selection. For more information about the properties, see [Section 3.7, “Directory Abstraction Layer Property Reference,”](#) on page 65.

The following table describes the directory abstraction layer toolbar:

Table 3-1 Directory Abstraction Layer Toolbar

Toolbar Button	Description
	Launches the Add Entity Wizard.
	Launches the Add Attribute Wizard.
	Launches the New List Wizard.
	Launches the New Query Wizard
	Launches the New Relationship Wizard.
	Launches the Set Global Access Modifiers dialog box.
	Launches the Set Global Localization dialog box.
	Expands and collapses the directory abstraction layer tree.

3.1.3 About Directory Abstraction Layer Editor Files

The directory abstraction layer files you work with are stored in the Designer project's `Provisioning\AppConfig\DirectoryModel` directory. The filenames are derived from the object key.


Table 3-2 Local Directory Abstraction Layer Directories

Directory name	Description
ChoiceDefs	Contains the files that define global lists. Files have the <code>choice</code> extension.
EntityDefs	Contains the files that define the entities and attributes. Files have the <code>entity</code> extension.
QueryDefs	Contains the files that define queries. Files have the <code>query</code> extension.
RelationshipDefs	Contains the files that define the relationships available to the Org Chart portlet and iManager provisioning configuration. These files have the <code>relation</code> extension.

Designer creates the base set of directory abstraction layer files for each provisioning project. An identical set is added to the User Application driver when the User Application is installed.

To customize the Identity Manager User Application, you change the directory abstraction layer objects and the changes to the User Application driver. Some entities, attributes, lists, and relationships are required for the User Application to function properly. The editor displays a lock next to the definitions that you should not delete. From the list below, you can see that you should not delete the *Group*, *User* or *User Lookup* entities.

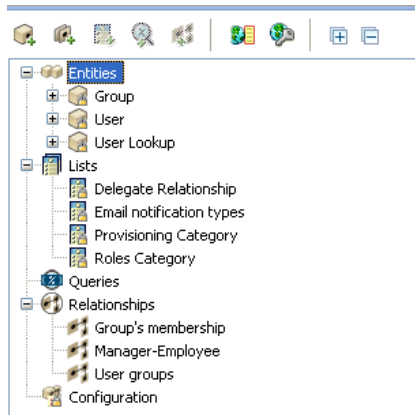Figure 3-1 DAL User Application Default Entities, Lists, and Relationships



If you define multiple User Application drivers in a single project, Designer creates multiple AppConfig folders and names them AppConfig, AppConfig1, AppConfig2, and so on.

3.2 Working with Entities and Attributes

You can customize your User Application by adding objects and their attributes based on the content of your own Identity Vault. You do this by adding new entities and attributes to the directory abstraction layer and deploying them to the User Application driver.

To modify the entity files installed by default, see [Section 3.2.2, “Adding Entities,” on page 48](#) and [Section 3.2.3, “Adding Attributes,” on page 53](#). To modify the entity files of an already ed project or a set of files defined by another developer, you must first import the files to your design environment. For information on importing files, see [Section 2.4, “Importing Provisioning Objects,” on page 23](#).

3.2.1 About Entities and Attributes

Any Identity Vault object that you want users to search, display, or edit in the Identity Manager User Application must be defined as an *entity* in the directory abstraction layer. For example, to use the inetOrgPerson Identity Vault object in the User Application, you must create an entity definition for it. There are two logical kinds of entities (but you create them the same way):

- ♦ **Entities that are mapped from schema:** These entities represent objects that exist in the Identity Vault that are directly exposed to users in the User Application. When defining this type of entity, expose all of the attributes that you want your users to work with. Examples of this entity type include User and Group. You can create more than one entity definition for the same object to expose different sets of attributes to different kinds of users. For more information, see [“Creating Multiple Entity Definitions for a Single Object” on page 48](#).
- ♦ **Entities that represent LDAP relationships:** This type of entity is known as a *DNLookup* and it is used by the User Application to:
 - ♦ Populate a list with the results of a DN search among related entities
 - ♦ Maintain referential integrity across DN referenced attributes during updates and deletes

Entities that support DNLookups are used by the Org Chart portlet to determine relationships and are also used by the Search, Create, and Detail portlets to provide pop-up selection lists and DN contexts. The User Lookup entity is an example of this type of entity. For more information, see [“Attributes and DNLookup Properties” on page 74](#).

Creating Multiple Entity Definitions for a Single Object

You can create more than one entity definition that represents the same Identity Vault object but provides a different view of the data. Within the entity definitions, you can define different attributes for each entity definition, or you can define the same attributes but specify different access properties that control how the attributes are searched, viewed, edited, or hidden.

NOTE: You can optionally define a filter to hide certain entities from the result set.

You can then use these different entity definitions in different parts of the user interface. For example, suppose that you want to create a directory of employees; one for a public site and one for an internal site. On the public site you want to supply first and last names and a phone number, but on the internal site, you want to list additional information like title, managers, and so on. Here's how you can accomplish this:

- 1 Create two entity definitions (with different keys).
Both entity definitions expose the same Identity Vault object, but one entity definition key is `public-staff-information`, and the other is `internal-staff-information`.
- 2 Within each entity definition, define a different set of attributes: one for `public-staff-information`, the other for `internal-staff-information`.
- 3 Use the *Portal Administration* tab of the Identity Manager User Application to create a portlet instance for the public page, and another one for the internal page.
For more information about creating portlet instances, see the Portlet Reference section in the *Identity Manager 3.5 User Application: Administration Guide*.

3.2.2 Adding Entities

You add entities through the Add Entity Wizard (described in the next procedure) or by clicking *Add Entity* (from the toolbar).

NOTE: When using the *Add Entity* button, you are prompted to select the object class of the entity to create, and the editor automatically adds the required attributes to the entity. Use the Add Attribute dialog box to complete the entity definition.

To add an entity using the Add Entity Wizard:

- 1 Launch the Add Entity Wizard in one of these ways:
 - From Designer's menus:
 - ♦ Select *File > New > Provisioning*. Choose *Directory Abstraction Layer Entity*, then click *Next*.
 - From the Provisioning view:
 - ♦ Right-click the *Entities* node, then choose *New*.
 - From the directory abstraction layer editor:
 - ♦ Select *DAL > New > Entity*
 - or
 - ♦ Right-click the *Entities* node, then choose *New Entity-Attributes Wizard*.


The New Entity dialog box displays.

NOTE: If launched from the *File* menu, the dialog box contains the additional fields shown below.

2 Fill in the fields as follows:

Field	Description
<i>Identity Manager Project and Provisioning Application</i>	The Identity Manager project and the provisioning application where you want to add the entity and attributes. NOTE: These fields display when you launch the wizard from the <i>File</i> menu.
<i>Entity Key</i>	A unique identifier for the entity.
<i>Display Label</i>	The string displayed when the entity is displayed by the User Application. You can localize this label. For more information, see Section 2.10, "Localizing Provisioning Objects," on page 35.

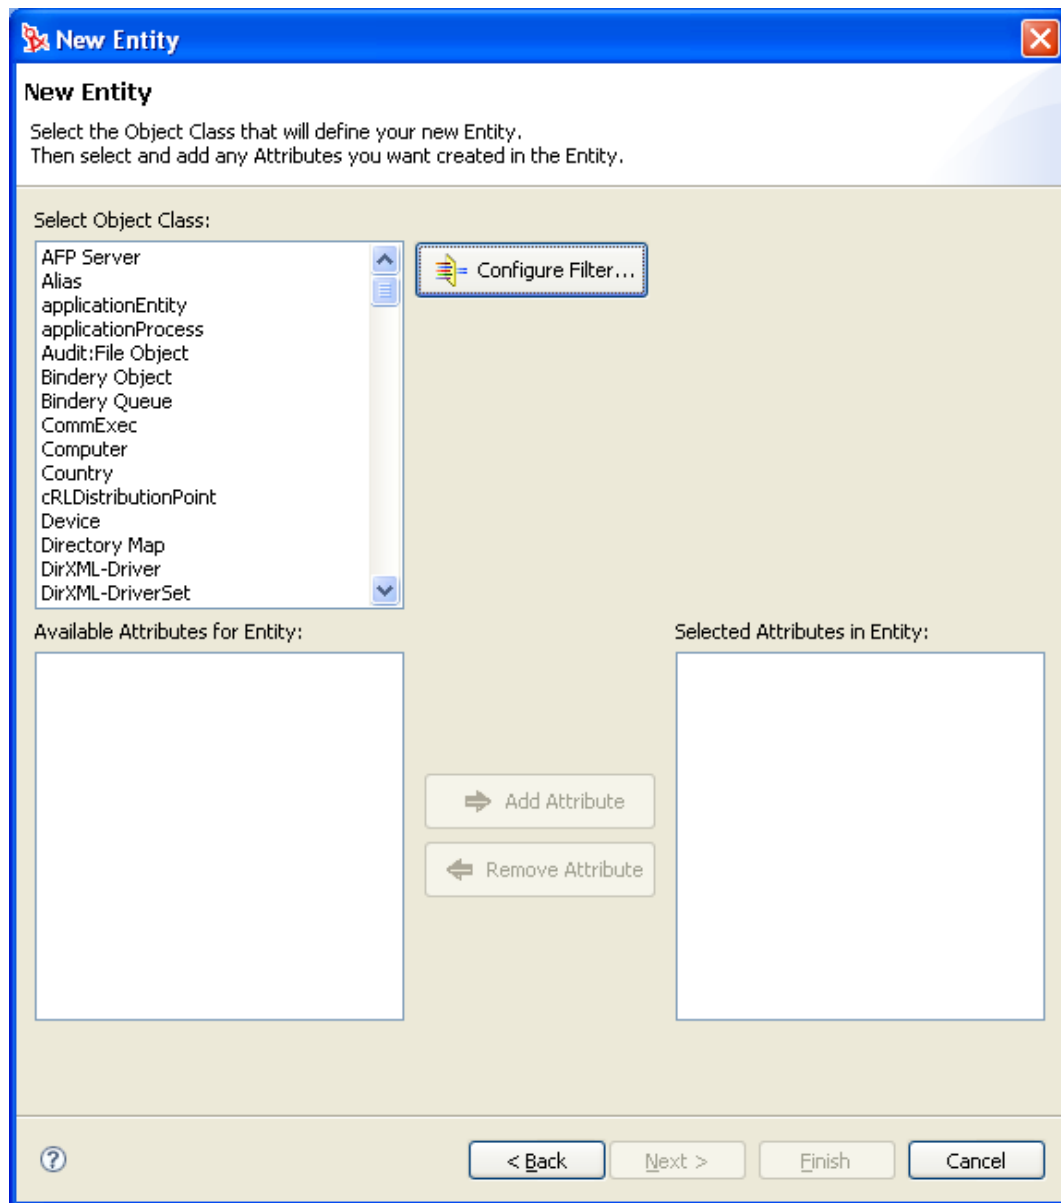3 Click *Next*. The New Entity dialog box displays:



- 4 Choose the entity's object class and add the attributes you want by double-clicking them in the *Available Attributes for Entity* list. Mandatory attributes are added when you select an *Object Class*, and you cannot remove them from the *Selected Attributes in Entity* list.

TIP: If the entity's object class is not shown in the *Select Object Class* list, you should update Designer's local schema file by following the steps described in [Section 3.2.4, "Updating the Schema Elements List,"](#) on page 54.

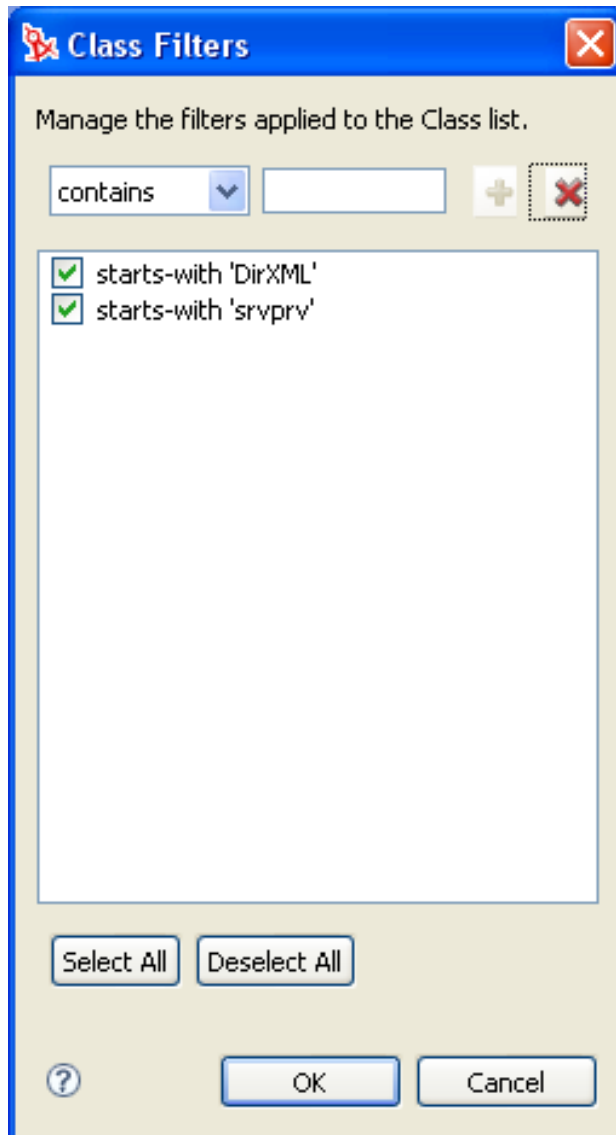
- 5 Click *Finish*.

The property page displays for editing. For more information, see ["Entity Properties"](#) on page 65. You must deploy the entity before it is available to the User Application.

Filter the Object Class List






You can limit the object classes shown in the New Entity dialog box by adding a filter. To add a filter:

- 1 Click *Configure Filter* to launch the Class List Filters dialog box.



By default, Designer does not apply any class filters. The Class Filter dialog box contains two predefined filters (*starts-with "DirXML"* and *starts-with "srvprv"*). To activate them, click *Select All*, then click *OK*. The filters are immediately applied to the object class list. Filters are applied until you deselect them.


2 Use the buttons as follows:

Button	Description
	Choose one of the string comparison operators, such as contains, starts-with, ends-with, then type the string to compare against.
	Adds a filter. Enabled when you define the filter comparison value.
	Removes the selected filter.
	Click this option when you want to use all of the filters. It selects all of the defined filters.
	Click this option when you want to deselect all of the defined filters. If you apply this change, no filters are used.

Adding Entity Filters

You define an entity filter to limit the entries returned for the specified entity. You define the filter based on attributes and their comparison to another value that you specify. For example, you can create a filter so that the User entity includes only those entries whose Region attribute contains Northeast.

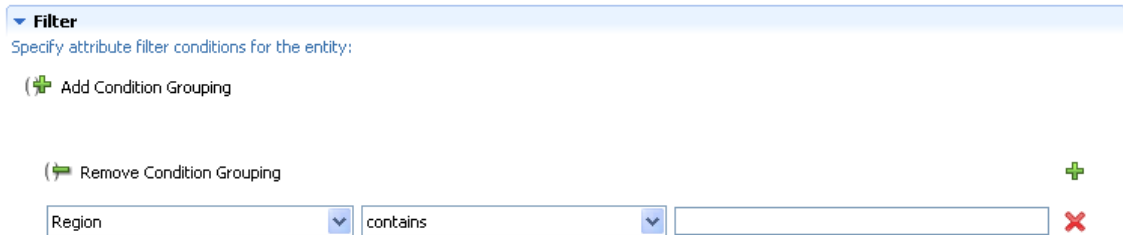1 Click *Add Condition Grouping*.



▼ Filter
Specify attribute filter conditions for the entity:

(+) Add Condition Grouping

(-) Remove Condition Grouping

Region contains

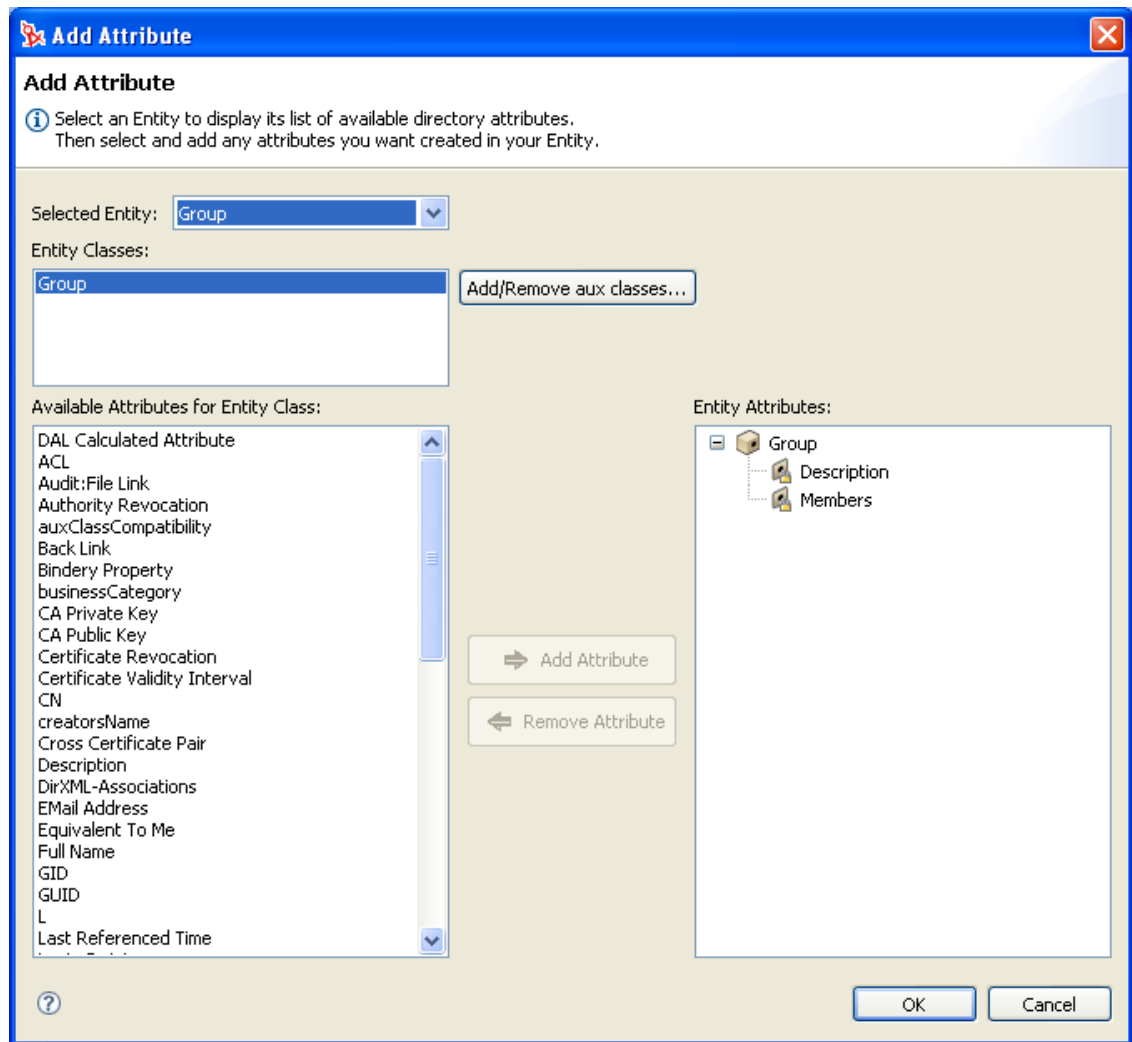
- 2 Use the drop-down list on the left to select an attribute.
- 3 Use the drop-down list in the middle to select a comparison operation.
- 4 Use the entry on the right to specify a value for comparison.
- 5 To specify multiple condition groupings, repeat this procedure. Within a condition grouping, you specify each criterion that you want and connect them by using the logical operations: and, or.

The conditions are evaluated in the order in which you define them.

3.2.3 Adding Attributes

- 1 Select an entity.
- 2 Do any of the following to add an attribute:
 - ♦ Right-click an entity, then select *Add Attribute*.
 - or
 - ♦ Click the *Add Attribute* button.
 - or
 - ♦ Click *DAL > New > Attribute*.

You are prompted to choose the entity class that contains the attributes that you want to add to the entity. You can also add (and remove) auxiliary classes if you need to add a class that contains the attribute you are looking for.



- 3 Add attributes by double-clicking them in the *Available Attributes for Entity Class* list.

LDAP operational attributes are supported by the directory abstraction layer editor and User Application; however, when you add an operational attribute, the Edit, Required, and Hidden properties are set to false and are disabled so you cannot change these property values.

TIP: If the attribute you want to add is not displayed in the *Available Attributes from Entity Class* list, you should update Designer’s local schema file by following the procedure in [Section 3.2.4, “Updating the Schema Elements List,”](#) on page 54.

- 4 Click OK. The property page displays for editing.

For more information, see [“Attribute Properties”](#) on page 69. To make an attribute available to the User Application, you must deploy it.

Adding DAL Calculated Attributes

You can create an attribute that is derived from an expression. For example, you can concatenate two or more attributes to produce a single calculated value. The expressions are ECMAScript compatible and conform to the ECMA 262 Language specification.

Restrictions: Because this attribute type does not map to a specific attribute in the Identity Vault, these attributes cannot be updated, removed, multivalued, required, or searched.

To create a calculated attribute:

- 1 Add an attribute as instructed in [Section 3.2.3, “Adding Attributes,”](#) on page 53 and make sure to select *DAL Calculated Attribute* from the *Available Attributes for Entity Class* list.

Designer adds the Attribute with the following restrictions:

Table 3-3 *Calculated Attribute Properties*

Property Name	Description
Expression	Click <i>Build ECMAScript Expression</i> to launch the ECMA Expression Builder. To learn more about how to use the ECMA Expression Builder, see Chapter 9, “Working with ECMA Expressions,” on page 315.

3.2.4 Updating the Schema Elements List

- 1 With the Identity Manager project open, right-click your Identity Vault, then select *Live > Import Schema*.
- 2 Choose *Import from eDirectory* and provide the specifications for the eDirectory host.
- 3 Click *Next*.
- 4 Select the classes and attributes to import, then click *Finish*.

3.3 Working with Lists

The lists node lets you define the contents of global lists. You can then define an attribute control type as a global list. When the User Application displays the attribute for editing, the contents of the global list are displayed in a drop-down list for the user to make a selection. By default, the directory abstraction layer includes the global lists described in [Table 3-4](#).

Table 3-4 Directory Abstraction Layer Default Global Lists

List Name	Description
Delegate Relationship	Defines the relationships that can be selected when making a Delegate Assignment by relationship. The contents of this list display in a drop-down list box. The values can only be DN attributes from the User entity.
Email Notification Types	Represents the type of e-mail notification that a user wants to receive when involved in proxy/delegate processing of resource requests. Types are locked. WARNING: Do not edit these values. This is used by the Preferred Notification attribute of the user entity.
Provisioning Category	Defines the set of categories that organize provisioned resources (entitlements) and provisioning requests. The categories in this list display in: <ul style="list-style-type: none">◆ Designer: Provisioning request definition editor plug-in◆ iManager: Provisioning Request Configuration plug-in◆ User Application: <i>Requests and Approvals</i> tab
Resources Category	Defines the set of categories that organize resources. The categories are displayed in: <ul style="list-style-type: none">◆ Designer: Role Plug-in◆ User Application: Roles and Resources tab
Roles Category	Defines the set of categories that organize roles. The categories are displayed in: <ul style="list-style-type: none">◆ Designer: Role plug-in◆ User Application: <i>Roles</i> tab

NOTE: You cannot delete these lists or change the key values for the lists. Except for the Email Notification types, you can add and remove items and change existing values and labels.

To create a new global list:

- 1 Launch the New List Wizard in one of these ways:

From Designer's menus:

- ◆ Select *File > New > Provisioning*, select *Directory Abstraction Layer List*, then click *Next*.

When launched from the File menu, the dialog box contains fields not displayed when launched in other ways.

- ◆ Select *DAL > New > List*.

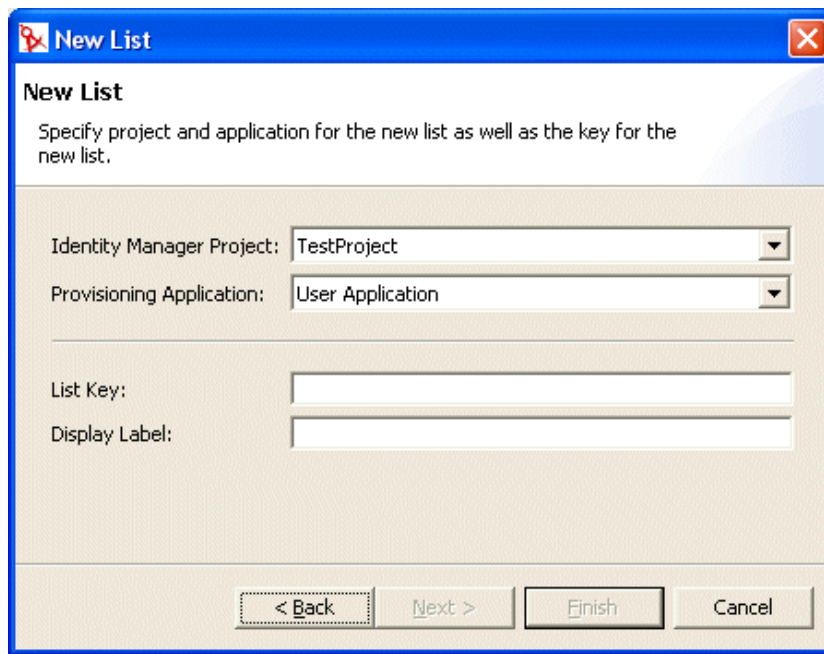
From the Provisioning view:

- ◆ Right-click the Lists node, then select *New*.

From the directory abstraction layer editor:

- ◆ Click *New List*.
- ◆ Right-click the Lists node, then select *Add List*.


The New List dialog box displays.



2 Fill in the fields as follows:

Field	Description
<i>Identity Manager Project and Provisioning Application</i>	Select the Identity Manager project and provisioning application where you want to add the list. NOTE: These fields display when you launch the wizard from the <i>File</i> menu.
<i>List Key</i>	The unique identifier for the list.
<i>Display Label</i>	The string used when the list is displayed in the User Application. You can localize this label. For more information, see Section 2.10, "Localizing Provisioning Objects," on page 35.



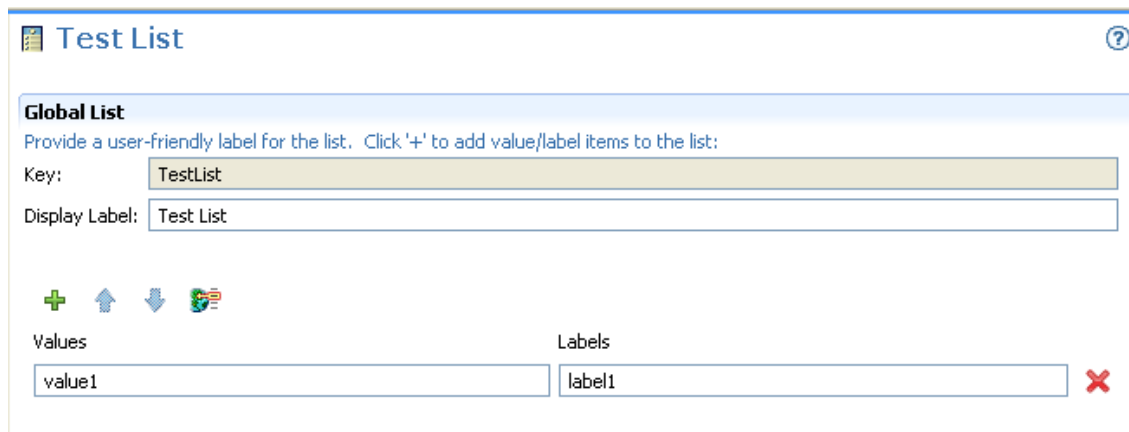

3 Click *Finish*. The Global Lists property page displays for editing.



4 Fill in the fields as follows:

Field	Description
<i>Display Label</i>	The name of the list. This is the name displayed in Designer.
<i>Labels</i>	The text for the list item to display in the User Application.
<i>Values</i>	The list item value stored in the Identity Vault. Valid characters include letters, numbers, and the underscore (_) character.

The following table describes the wizard's buttons:

Button	Description
	Adds a new value
	Moves the row up or down in the list. This order specifies how the labels are displayed in the User Application.
	Displays the localization dialog box. For more information on using the dialog box, see Section 2.10, "Localizing Provisioning Objects," on page 35 .
	Deletes the row.

5 Save the project.

6 to make it available to the User Application.

3.4 Working with Queries

The Queries node allows you to define commonly used LDAP searches that you can execute from a request or approval form by using the DNQuery control or by calling the `globalQuery()` method. To define the query, you specify the directory abstraction layer entity, the search root, the number of rows to retrieve, and the conditions for retrieving the source entity. You can hard-code the conditions (for example, Where LastName contains s) or specify one or more parameters that are supplied by the user on the request or approval form.

To create a query:

1 Launch the New Query Wizard in any of these ways:

From Designer's menus:

- ◆ Select *File > New > Provisioning*. Choose *Directory Abstraction Layer Query*, then click *Next*.
- ◆ Select *DAL > New > Query*.

From the Provisioning view:

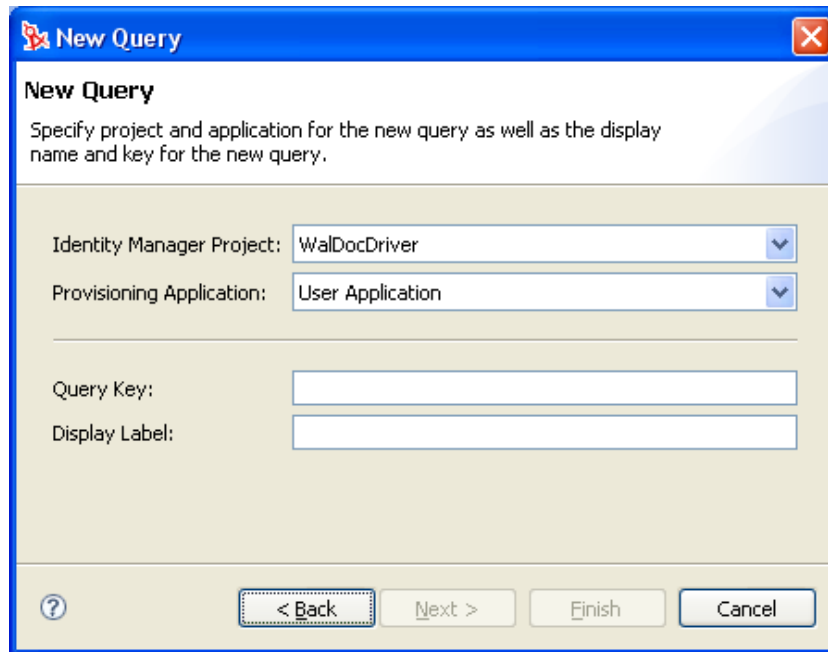
- ◆ Right-click *Query*, then select *Add*.

From the directory abstraction layer editor:

- ◆ Click the *Add Query* button.
- ◆ Right-click *Query*, then select *Add Query*.

The New Query dialog box displays.

NOTE: When launched from the *File* menu, the dialog box contains fields not displayed when launched in other ways.



2 Fill in the fields as follows:

Field	What to do
<i>Identity Manager Project and Provisioning Application</i>	Select the correct Identity Manager project and Provisioning Application. NOTE: This field displays when you create queries from the <i>File</i> menu.
<i>Query Key</i>	Type a unique value for the query key. This value is used in the Expression Builder to identify the query.
<i>Display Label</i>	Type a string to display in the directory abstraction layer editor and Provisioning view. This value is not visible in the Expression Builder.

3 Click *Finish*.

The editor creates the query and opens the property page for editing.

Sample Query ?

General
Provide a user-friendly label for the query:

Key:

Display Label:

Query Entity:

Parameters
Define parameter references:

Query Conditions
Provide conditions for the query entity selected above:

Add Condition Grouping

Search
Provide search constraints for the query:

Search Root:

Search Scope:


Max Search Entries: (0=use runtime setting)

- 4 Select a *Query Entity*. If the entity you want to use is not displayed, make sure it is defined in the Entities node.
- 5 In the *Parameters* section, define one or more parameters for the query. To add parameters:
 - 5a Click *Add Row*.


Parameters
Define parameter references:

Parameter Keys	Parameter Display Labels
<input type="text" value="param1"/>	<input type="text" value="label1"/> ✘

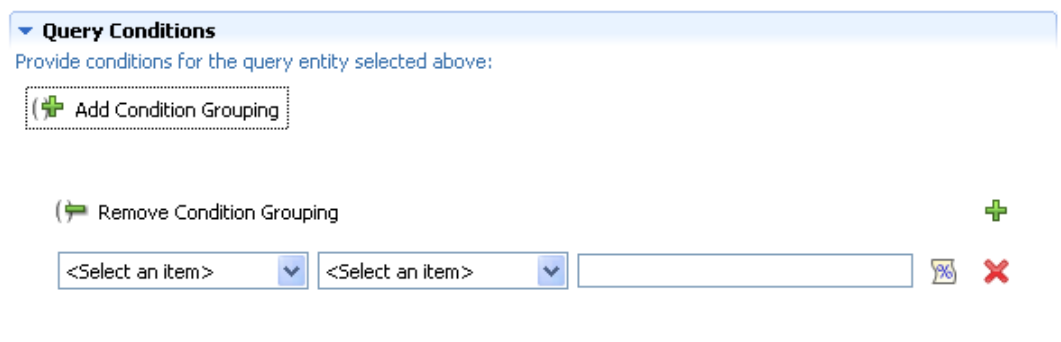- 5b Specify a unique key and a display label for the parameter. You pass this key when calling the `globalQuery()` method on a form. For more information on `globalQuery()`, see [“globalQuery\(fieldname, key, param\)” on page 335](#).
- 5c Add additional parameters by repeating these steps.
- 6 To further refine the query, add *Query Conditions*.
 - 6a Click *Add Condition Grouping* (a *Query Entity* must be selected to enable *Add Condition Grouping*).



- 6b Use the drop-down list on the left to select an attribute. The attributes in this drop-down are the attributes on the selected *Query Entity*.
- 6c Use the drop-down in the middle to select a comparison operation to perform against your chosen attribute.
- 6d Use the entry on the right to specify a value to compare against your chosen attribute. You can select a variable name by clicking *Predefined Parameters* to launch the Predefined Parameters dialog box.

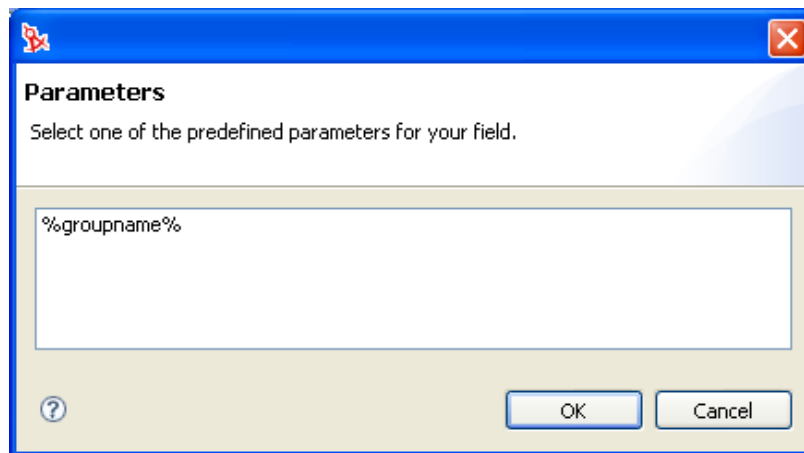

If the query needs to filter on more than one attribute or condition and you want to control the order in which the conditions are evaluated, you can define multiple conditions or condition groupings. Within a condition grouping, you specify each criterion that you want and connect them by using the logical operations: and, or.

- 7 To specify multiple condition groupings, click *Add Condition Groupings* and make your selections from the drop-down list boxes.
- 8 Define the query's LDAP Search properties if you want to narrow the search further than already defined for the selected entity. The query's search root, unlike the entity search root, does not support the use of predefined parameters. For more information, see [Section 3.7.3, "Queries Properties," on page 79](#).
- 9 Click *Save*.
- 10 the query to make it available to the User Application.

3.5 Working with Relationships

The Relationships node allows you to define relationships between entities defined in the directory abstraction layer. The relationships you define are used in the User Application by the Organization Chart and in iManager for defining the members within a group.

The relationship you define can be between like entities (such as user/user) or unlike entities (such as user/device). You can define conditions for the relationship to further refine it. For example, you might want to create a condition that shows all Manager-Employee relationships and then refine it to show only employees in one particular region, or show all the subordinates of a vice president located in the eastern region.

The following relationships are defined, by default, for the User Application:

- ◆ Group's membership (Org Chart only)
- ◆ Manager-Employee (Org Chart and Management)
- ◆ User groups (Org Chart only)

A relationship can only be used by Management when the Source and Target entities are both related to the InetOrgPerson object.

To successfully deploy a relationship, all of the components (entities and attributes) of the relationship must already be deployed.

- 1 Create a new relationship in any of these ways:

From Designer's menus:

- ◆ Select *File > New > Provisioning*. Choose *Directory Abstraction Layer Relationship*, then click *Next*.
- ◆ Select *DAL > New > Relationship*.

From the Provisioning view:

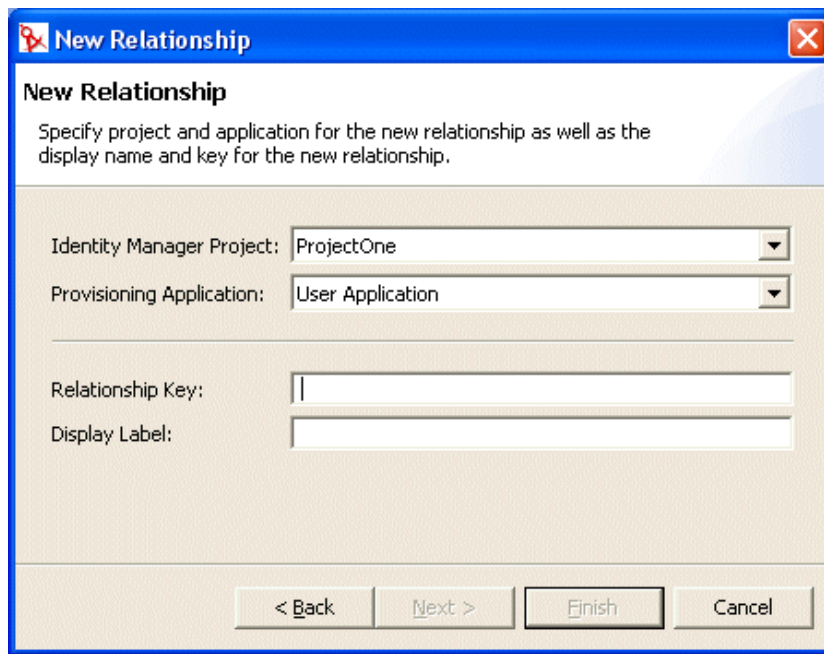
- ◆ Right-click *Relationships*, then select *Add*.

From the directory abstraction layer editor:

- ◆ Click the *Add Relationship* button.
- ◆ Right-click *Relationships*, then select *Add Relationship*.

The New Relationship dialog box displays.

NOTE: When launched from the *File* menu, the dialog box contains fields not displayed when launched in other ways.




2 Fill in the fields as follows:

Field	What to do
<i>Identity Manager Project and Provisioning Application</i>	Select the correct Identity Manager project and Provisioning Application. NOTE: This field displays when you create relationships from the <i>File</i> menu.
<i>Relationship Key</i>	Type a unique value for the relationship key.
<i>Display Label</i>	Type the string to display when the relationship displays in the User Application.

3 Click *Finish*.

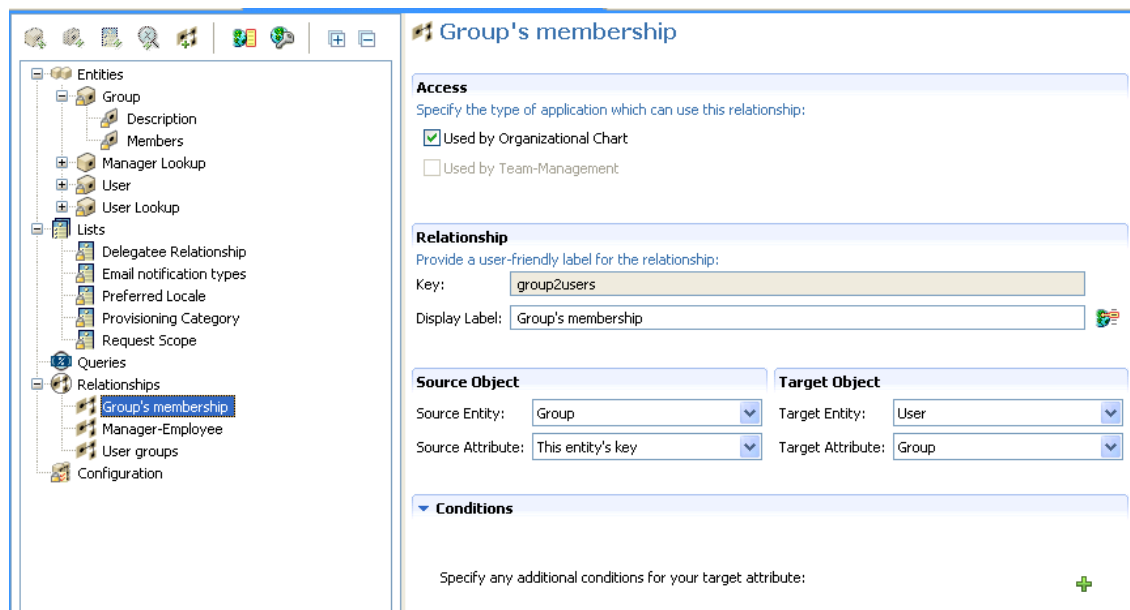The editor creates the relationship and opens the property page for editing.



For property definitions, see [Section 3.7.4, “Relationship Properties,”](#) on page 80.

To delete a relationship:

- 1 Right-click the relationship you want to delete, then click *Delete*.

To add a relationship condition:

- 1 Click *Add Row*.
- 2 Use the drop-down list box (on the left) to select an attribute. The attributes in this drop-down are attributes on the *Target Object* entity.
- 3 Select an operator from the middle drop-down list box.

- 4 Use the text field on the right to specify the comparison value to complete the condition. For example:

Manager-Employee(region)

Access
Specify the type of application which can use this relationship:

Used by Organizational Chart Enable Cascading Relationship
 Used by Team-Management 0 Maximum levels to cascade

Relationship
Provide a user-friendly label for the relationship:

Key: user2users2
 Display Label: Manager-Employee(region)

Source Object **Target Object**

Source Entity: User Target Entity: User
 Source Attribute: This entity's key Target Attribute: Manager

Conditions

Specify any additional conditions for your target attribute:

Region equals Latin




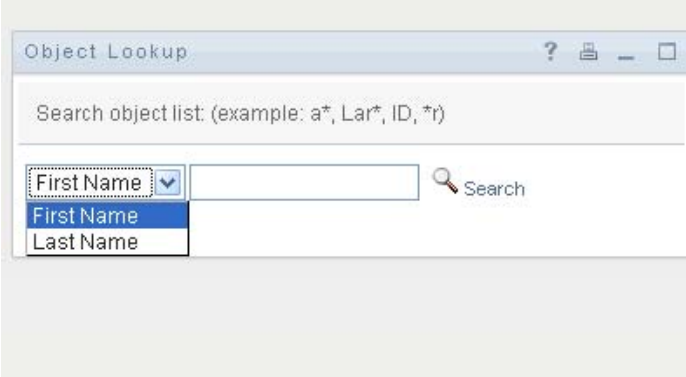
You can create a condition that filters on more than one attribute or condition and connect the attributes by using the logical operations: and, or. The conditions are evaluated in the order in which you define them.

3.6 Working with Configuration Settings

The Configuration node allows you to set general configuration properties for the User Application.

Table 3-5 Configuration Settings

Field	Description
Default 'My Profile' Entity	Defines the entity to display when the user clicks <i>My Profile</i> in the user interface. This field is restricted to show only entities whose object class is user (or LDAP inetOrgPerson).
Default LDAP Naming Attributes	Defines the default LDAP naming attribute if the entity's Create Naming Attribute is not defined.

Field	Description
<i>Default Management Attributes</i>	<p>The attributes used to look up members. In the My 's Work and My 's Settings pages of the User Application, the user is able to search for members by clicking the search icon. For example:</p> <p>Team Member: <input type="text"/>   </p> <p>The search displays the attributes specified here, for example:</p>  <p>These settings only affect the lookups performed by Managers. The User Application administrator sees only First Name and Last Name.</p>
<i>Container Classes</i>	<p>This provides the <i>Create User or Group</i> action with the contents of a selection list of container classes. The user selects a container from the selection list as the location for the newly created object.</p>

3.7 Directory Abstraction Layer Property Reference

The section provides definitions for the properties for the following abstraction layer nodes:

- ♦ [Section 3.7.1, "Entity Properties," on page 65](#)
- ♦ [Section 3.7.2, "Attribute Properties," on page 69](#)
- ♦ [Section 3.7.3, "Queries Properties," on page 79](#)
- ♦ [Section 3.7.4, "Relationship Properties," on page 80](#)

3.7.1 Entity Properties

You can set the following kinds of properties on entities:

- ♦ ["Entity Access Properties" on page 66](#)
- ♦ ["Entity General Properties" on page 66](#)
- ♦ ["Entity Auxiliary Properties" on page 66](#)
- ♦ ["Entity Search Properties" on page 67](#)
- ♦ ["Entity Create Properties" on page 68](#)

- ♦ “Entity Password Management Properties” on page 68
- ♦ “Using Predefined Parameters” on page 68

Entity Access Properties

Access properties control how the User Application interacts with the entity.

NOTE: You can also access the access properties by selecting *DAL > Set Global Access*.

Table 3-6 *Entity Access Properties*

Property Name	Description
Create	When selected, this object can be created by the User Application.
Edit	When deselected, this object cannot be changed by the User Application regardless of the underlying ACLs. When selected, this object is editable, but the Identity Vault ACLs are used to determine this.
View	When selected, this object can be displayed by the User Application.
Remove	When selected, this object can be deleted by the User Application.

Entity General Properties

Table 3-7 *Entity General Properties*

Property Name	Description
Key	The unique identifier for this entity. It defines the way the User Application references this object. It is defined when the entity is created and cannot be modified after the entity is created.
Display Label	Defines how the object is shown in the user interface.
Class Name	The eDirectory object class name.
LDAP Name	The LDAP object class name.
Include in Search	When selected, this entity is searchable in the User Application. Entities used in queries by identity portlets (such as Entity Search List or Entity Org Chart) must be selected (True).

Entity Auxiliary Properties

Table 3-8 Entity Auxiliary Properties

Property Name	Description
Auxiliary Classes	<p>A list of zero or more auxiliary classes for this entity. If you are adding auxiliary classes, you are prompted to define:</p> <ul style="list-style-type: none">◆ The auxiliary class by selecting from the list of those available◆ Whether it is searchable. Setting searchable to True applies a filter to LDAP searches that involve directory abstraction layer relationships. For example, if you added an aux class to the user entity and specified that the aux class was searchable, the Org Chart (using the manager-employee relationship) would display only the employees that have the aux class.◆ Whether to <i>Add Always</i>. When True (selected), the object class is automatically added when the entity is modified in the User Application. Modification includes create or update operations. When False, the object class is only added if an attribute associated with the auxiliary class is modified.

Entity Search Properties

Table 3-9 Entity Search Properties

Property Name	Description
Search Container	<p>The distinguished name of the LDAP node or container where searching starts (the search root). For example:</p> <p><code>ou=sample,o=ourOrg</code></p> <p>You can browse the Identity Vault to select the container, or you can use one of the predefined parameters described in “Using Predefined Parameters” on page 68.</p>
Search Scope	<p>Specifies where the search occurs in relation to the search root. Values are:</p> <p><Default>: This search scope is the same as selecting <i>Containers and subcontainers</i>.</p> <p>Container: The search occurs in the search root DN and all entries at the search root level.</p> <p>Container and subcontainers: The search occurs in the search root DN and all subcontainers. This is the same as selecting <i><Default></i>.</p> <p>Object: Limits the search to the object specified. This search is used to verify the existence of the specified object.</p>
Search Time Limit [ms]	Specify a value in milliseconds or specify 0 for no time limit.
Max Search Entries	Specify the maximum number of search result entries you want returned for a search. Specify 0 if you want to use the runtime setting. Recommendations: Set it between 100 and 200 for greatest efficiency. Do not set it over 1000.

Property Name	Description
Perform Automatic Query	<p>When selected, performs an automatic query of the entity and presents the results in a selectable list. Do not choose this option if the data returned will be a large number because it forces the user to scroll through a large result set.</p> <p>When not selected, allows the user to specify the search criteria for the entity query, then presents the results in a selectable list.</p>

Entity Create Properties

Table 3-10 *Entity Create Properties*

Property Name	Definition
Create Container	<p>The name of the container where a new entity of this type is created.</p> <p>You can browse the Identity Vault to select the container, or you can use one of the predefined parameters described in “Using Predefined Parameters” on page 68.</p> <p>If you do not specify this value, then the Create portlet prompts the user to specify a container for the new object. The portlet uses the search root specified in the entity definition as the base and allows the user to drill down from there. If there is no search root specified in the entity definition then it uses the root DN specified during the User Application installation.</p>
Create Naming Attribute	<p>The naming attribute of the entity. It is the relative distinguished name (RDN). This value is only necessary for entities where the access parameter Create is selected.</p>
LDAP attribute	<p>The LDAP attribute for the Create Naming Attribute.</p>
Create Naming Label	<p>Display label displayed in the User Application for the Create Naming Attribute.</p>

Entity Password Management Properties

Table 3-11 *Entity Password Management Properties*

Property Name	Definition
Password required when entity is created	<p>If the password attribute is required, set this value to True (selected) to ensure that one is required by the Create portlet. If a password is required, then you cannot create this entity in a workflow.</p>

Using Predefined Parameters

The directory abstraction layer editor allows you to use predefined parameters for certain values.

Table 3-12 *Predefined Parameters*

Predefined Parameter	Description
%driver-root%	Represents the Provisioning Driver DN. This value is specified during the User Application configuration during installation or a later configuration. It is stored in the User Application's realm configuration.
%user-root%	Represents the User Container DN. This value is specified during the User Application configuration during installation or a later configuration. It is stored in the User Application's realm configuration.
%group-root%	Represents the Group Container DN. This value is specified during the User Application configuration during installation or a later configuration. It is stored in the User Application's realm configuration.

3.7.2 Attribute Properties

You can set the following kinds of properties on attributes:

- ◆ [“Attribute Access Properties” on page 69](#)
- ◆ [“Attribute General Properties” on page 71](#)
- ◆ [“Attribute Default Value Properties” on page 71](#)
- ◆ [“Attribute UI Control Properties” on page 71](#)
- ◆ [“Attributes and DNLookup Properties” on page 74](#)

Attribute Access Properties

NOTE: You can set attribute access for all of an entity's attributes by selecting *DAL > Set Attribute Access*, right-clicking an entity, and selecting *Set Attribute Access*.

Table 3-13 *Attribute Access Properties*

Name	Description
Edit	When selected, this attribute can be edited/modified by the User Application. Even if it is selected (True), the attribute might still not be editable if the underlying Identity Vault ACLs/effective rights prevent it.
Enable	When deselected, this attribute cannot be used by the User Application. It is the same as removing the entry from the file.

Name	Description
Hide	<p>Controls whether the <i>Hide</i> check box in the User Application is enabled or disabled. The <i>Hide</i> check box allows users to control whether an attribute (such as a photo) is displayed by the application.</p> <p>When deselected, the <i>Hide</i> check box is disabled for this attribute, so the user cannot choose to hide this attribute.</p> <p>When selected, the <i>Hide</i> check box can be enabled in the User Application. However, the following must also be true of the logged-in user.</p> <ul style="list-style-type: none"> ◆ He or she is either the owner of the attribute or a User Application Administrator. ◆ He or she has Trustee rights to update the <code>srvprvHideAttributes</code> attribute on the Identity Vault. <p>If these requirements are not met, then the <i>Hide</i> check box is disabled in the user interface even if this setting is selected (True).</p> <p>TIP: When a user hides an attribute that contains an image, users who have viewed the image might continue to see it until their browser cache is refreshed.</p> <p>The Search and Hide properties are mutually exclusive. If Hide is selected (True), Search cannot also be selected (True). If Search is selected (True), Hide cannot be selected (True).</p>
Multivalue	<p>Specifies whether this attribute can be multivalued, for example, a phone number.</p> <p>When selected, the attribute can be multivalued.</p>
Read	<p>When this option is selected, the User Application can query this attribute. For most attributes this should be selected (True), but for some attributes, like password, it should be deselected.</p>
Require	<p>When this option is selected, the attribute must be supplied.</p>
Search	<p>When this option is selected, the User Application can search on this attribute. Attributes that are used in queries by identity portlets (such as Entity Search List or Entity Org Chart) or request and approval forms must be selected.</p> <p>TIP: If an attribute used in a search is also indexed in eDirectory, the search is faster.</p> <p>The Search and Hide properties are mutually exclusive. If Hide is selected (True), Search cannot also be selected (True). If Search is selected (True), Hide cannot be selected (True).</p>
View	<p>When this option is selected, the User Application can display this attribute. In most cases this is selected, but for attributes like password, it should be deselected. If you specify it in a request or approval form, view must be selected.</p>

Attribute General Properties

Table 3-14 Attribute General Properties

Property Name	Description
Key	The unique identifier for the attribute.
Display Label	The label that is displayed in the User Application.
Attribute Name	The eDirectory name for this attribute.
LDAP Name	The LDAP name for this attribute.

Attribute Default Value Properties

This value is used when an object is created via the Create identity portlet or through a workflow. You can express the default value as a literal or an ECMAScript expression. You cannot use a default value as part of a calculated attribute. If defined as an ECMAScript expression, it is resolved at runtime. If you define both the literal and an expression, the expression takes precedence.


TIP: If you want the default value to be displayed by the Create portlet, you must define the access property viewable as True (selected). If you want the user to be able to change the value, you must set the editable property to True.

Attribute UI Control Properties

Table 3-15 Attribute UI Control Properties

Property Name	Description
Data Type	Choose a data type from the following list: <ul style="list-style-type: none">◆ Binary◆ Boolean◆ DN◆ Integer◆ LocalizedString <p>NOTE: Selecting the LocalizedString Data Type causes the search to be case-sensitive in the UI.</p> <ul style="list-style-type: none">◆ String◆ Time

Property Name	Description
Format Type	<p>Used by the User Application to format data. Format types include:</p> <ul style="list-style-type: none">◆ None◆ AOL IM◆ Email◆ Groupwise IM◆ Image◆ Phone Number◆ Yahoo IM◆ Image URL◆ Date◆ DateTime <p>The Format Types are dependent on the data type. For example, a Time data type can only be associated with Date and DateTime formats.</p>

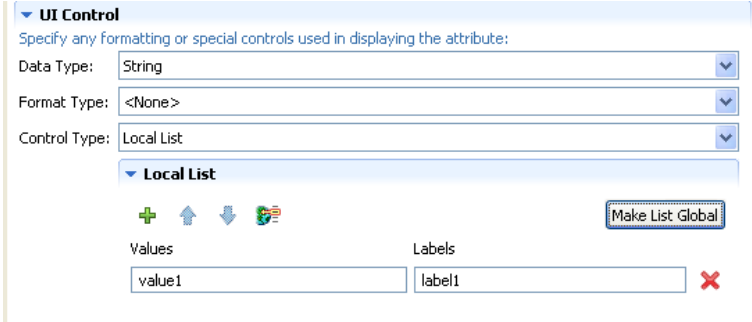Property Name	Description
Control Type	<p>Types include:</p> <p><i>DNLookup</i>: Defines that this attribute contains a DN reference. Use when you want to:</p> <ul style="list-style-type: none"> ◆ Populate a list with the results of a DN search among related entities. ◆ Maintain referential integrity across DN referenced attributes during updates and deletes. ◆ Use the attribute in an object selector dialog box. Object selectors are used by certain identity portlets, such as Detail, and are also available to the form controls you can define for provisioning request and approval forms. <p>The User Application uses this information to generate special user interface elements (such as an object selector), and to perform optimized searches based on the DNLookup definition.</p> <p>For more information on defining this property, see the “Attributes and DNLookup Properties” on page 74. For more information on the object selector dialog box for request and approval forms, see Section 5.6.2, “Working with Object Selectors,” on page 163.</p> <p><i>Global List</i>: Display this attribute as a drop-down list whose contents are defined in a file outside of this attribute definition. Click <i>Go to list</i> to access the Global List editor for the selected list.</p> <p>For more information, see Section 3.3, “Working with Lists,” on page 54.</p> <p><i>Local List</i>: Display this attribute as a drop-down list whose contents are defined with this attribute. To define a local list:</p> <ol style="list-style-type: none"> 1. With the attribute selected, set the control type to <i>Local List</i>.  <ol style="list-style-type: none"> 2. Use the buttons to add or remove list items. Use the up-arrow and down-arrow buttons to change the position of the item in the list. <p>In the <i>Value</i> column, type the value to write to the Identity Vault. It can include letters, numbers, and the underscore (_) character.</p> 3. In the <i>Labels</i> column, type the text you want displayed in the user interface. <p><i>Range</i>: Use the Range control type with Integer data types to restrict user input to a sequential range of values. Define the range’s start and end values.</p>

Attributes and DNLookup Properties


When you define an attribute as a DNLookup control type, it means that:

- ◆ This attribute can be used in an object selector dialog box that allows users to select from a list of possible values when searching on this attribute.
- ◆ When this attribute is created, populated, or deleted through the User Application, an attribute on a related entity is updated appropriately depending on the user action (create, delete, update) to maintain referential integrity.
- ◆ [“DNLookups for Object Selectors” on page 74](#)
- ◆ [“DNLookups for Referential Integrity” on page 78](#)
- ◆ [“DNLookup Property Reference” on page 78](#)

DNLookups for Object Selectors


The DNLookup Display properties for a particular attribute define the contents of the object selectors in the User Application. Object selectors are displayed by the Identity Self-Service portlets and in workflow request and approval forms. They provide a convenient way for users for users to search and select objects that represent DNs (such as users or groups). The object selector displays a drop-down list of attributes; the user can select one of the attributes and then enter search criteria for that attribute. In this example, the user searches for groups by group description.

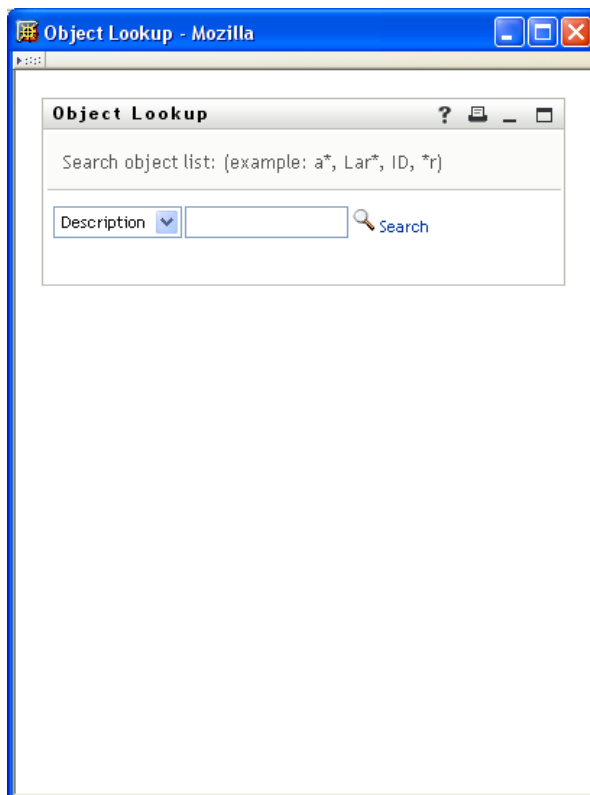Figure 3-2 *Sample Object Selector*




The result of the user's selection looks like this:

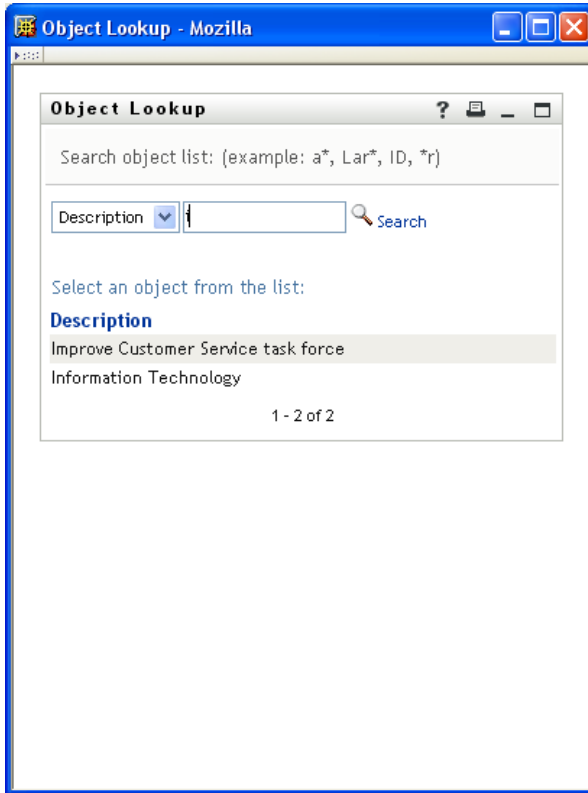Figure 3-3 Sample Object Selector Results




The DNLookup display properties control the contents of the object selector and the result set. The object selector, shown above, displays this way because it was based on the group attribute of the user entity. The group attribute is defined as a DNLookup control type as shown here:

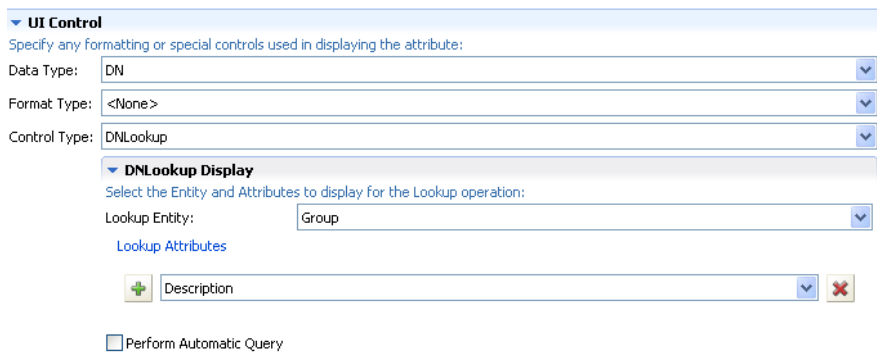Figure 3-4 Group DNLookup Definition



This definition also controls the way identity portlets provide a selection list of groups for a user. For example, a user might choose to do a Directory Search to find a user in a group, but the group name is unknown. The user would select User as the object to search for and select group as the search criteria, as follows:

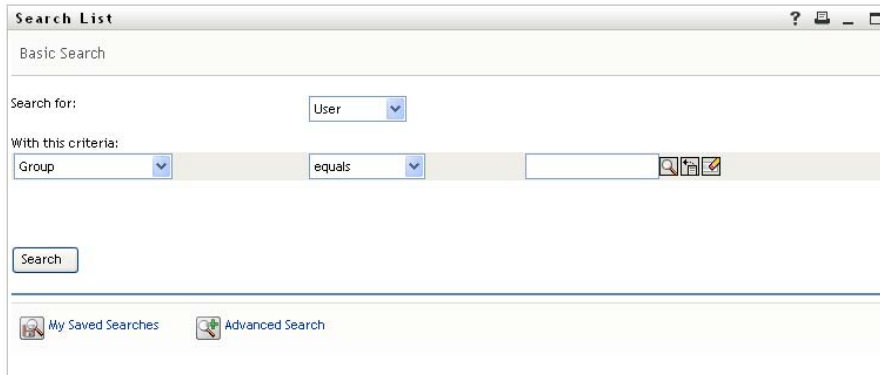
Figure 3-5 Search Criteria



The screenshot shows a window titled "Search List" with a "Basic Search" section. Under "Search for:", a dropdown menu is set to "User". Under "With this criteria:", there are two dropdown menus: the first is set to "Group" and the second is set to "equals". To the right of these dropdowns is an empty text input field and three small icons: a magnifying glass, a folder, and a checkmark. Below the input field is a "Search" button. At the bottom of the window, there are two links: "My Saved Searches" and "Advanced Search".

Because the members attribute is a DNLookup for the user entity, the *Lookup* icon displays. If the user selects it, then a list of possible groups displays.

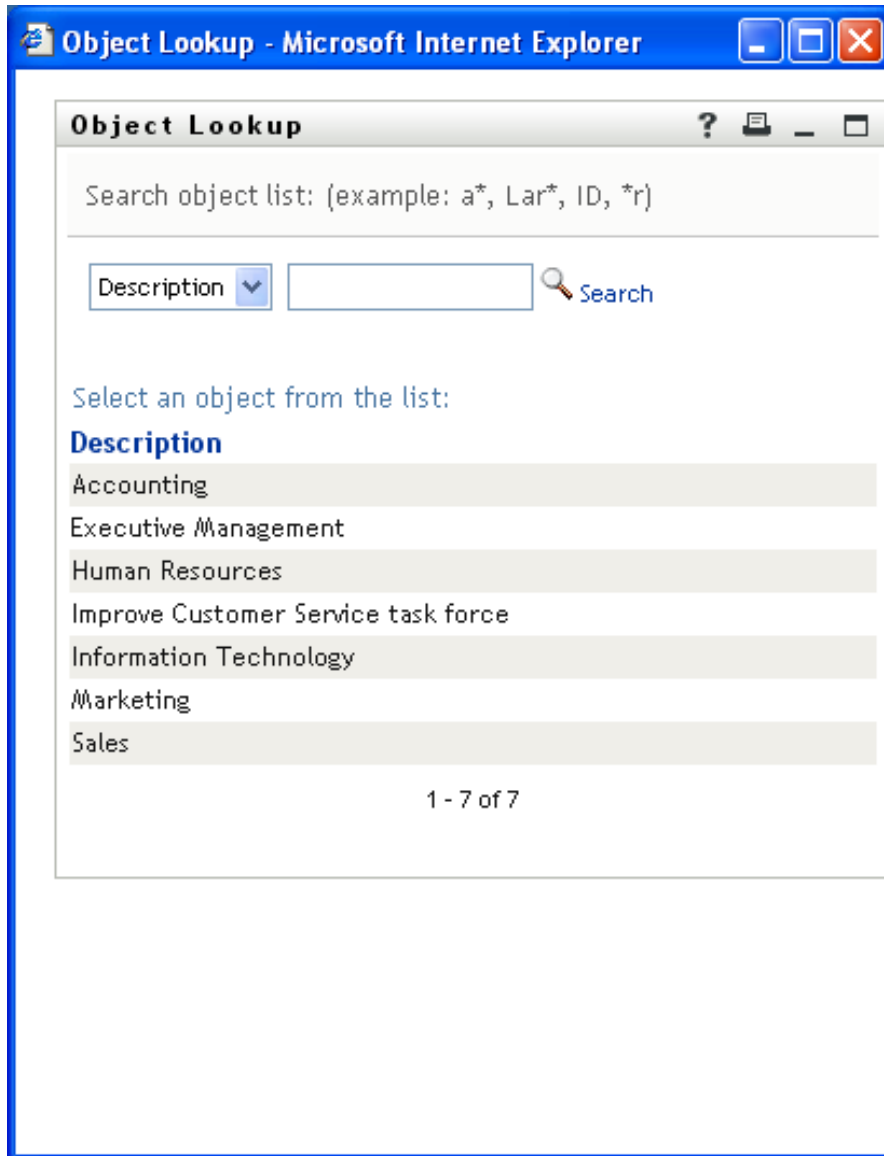Figure 3-6 Object Lookup



When the user picks a group, then he or she can select a group from the list and all of the members of that group are displayed.

NOTE: When the Perform Automatic Query property is not selected (False), the object selector is not populated when first displayed to the user and the user must enter selection criteria. The example above illustrates the object selector that displays when the Perform Automatic Query property is selected (True).

DNLookups for Referential Integrity

DNLookups for updates and synchronization are important because LDAP allows group relationships to map in both directions. For example, your data might be set up so that:

- ◆ The User object contains a group attribute. The group attribute is multi-valued and lists all of the groups to which a user belongs.
- ◆ The Group object contains a user attribute. The user attribute is multi-valued and lists all of the users that belong to the group.

This means that you can have an attribute on the user object that shows all the groups a user belongs to, and on the Group object you have a DN attribute that includes all the members of that group.

When the user requests an update, the User Application must honor the relationships and ensure that the target and source attributes are synchronized. In the DNLookup, you specify both attributes that must be synchronized. You can use this technique to provide synchronization between any objects that are related not just group structural objects. Create this kind of DNLookup control type by specifying the advanced DNLookup properties described in the *DNLookup Relational Integrity properties* reference.

DNLookup Property Reference

Table 3-16 *DNLookup Display Properties*

Property Name	Description
Lookup Entity	The name of the entity to search. For example, suppose that the User entity contains an attribute for Manager. To populate that field, you'd need to know which users are Managers.
Lookup Attributes	Choose one or more attributes to display when a search is performed.
Perform Automatic Query	Defines how the Lookup Attributes are displayed. <ul style="list-style-type: none">◆ When this option is selected, the form or portlet performs an automatic query of the entity and presents the results in a selectable list. This option is not recommended if a large amount of data can be returned because it forces the user to scroll through a large result set.◆ When this option is deselected, allows the user to specify the search criteria for the entity query, then presents the results in a selectable list.

Table 3-17 *DNLookup Detail Properties*

Property Name	Description
Detail entity	The key of the entity whose details you want displayed if the user requests more information by clicking a hypertext link in the User Application. When you define a DNLookup, the identity portlets are able to provide a hypertext link that allows users to display the details of the linked object.

The DNLookup Relational Integrity properties are used for synchronizing data between two objects such as groups and group members.

Table 3-18 *DNLookup Relational Integrity Properties*

Property Name	Description
Source Attributes to Update	Name of the attribute to update. The attribute must contain a DN reference to the Target Attributes to Update. This is required to synchronize attributes on two different objects.
Target Attributes to Update	Name of the attribute that must be updated along with the Source Attributes to Update. This is an LDAP attribute name. This is required to synchronize attributes on two different objects. The attribute must contain a DN reference.
Target Auxiliary Classes Needed, if any	Name of the auxiliary class that contains the Target Attributes to Update.

3.7.3 Queries Properties

You can set the following kinds of Queries properties:

- ♦ [“Queries General Properties” on page 79](#)
- ♦ [“Query Parameters Properties” on page 79](#)
- ♦ [“Query Search Properties” on page 80](#)

Queries General Properties

Table 3-19 *Queries General Properties*

Property Name	Description
<i>Key</i>	A unique value for the query key. This value is used in the Expression Builder to identify the query. The key is specified at the query creation time. It cannot be modified after the query is created.
<i>Query Entity</i>	Select an entity from the drop-down list box. The resulting LDAP search is on this entity.
<i>Display Label</i>	Type a string to display in the directory abstraction layer editor and Provisioning view. This value is not visible in the Expression Builder.

Query Parameters Properties

Table 3-20 *Queries Parameters Properties*

Property Name	Description
<i>Parameter Keys</i>	A unique identifier for the key. You pass this key when calling the <code>globalQuery()</code> method on a form.
<i>Parameter Display Labels</i>	A label to identify the key.

Query Search Properties

If left blank, the query search properties default to the search properties specified for the selected entity. Specify the query search properties to further refine the search scope already defined for the entity. You cannot specify predefined parameters (for example, %user-root%) in the query's search properties.

Table 3-21 Query Search Properties

Property Name	Description
Search Root	Specifies the location in the LDAP tree where the LDAP search defined by the query begins.
Search Scope	Specifies where the search occurs in relation to the search root. Values are: <Default> : This search scope is the same as selecting <i>Containers and subcontainers</i> . Container : The search occurs in the search root DN and all entries at the search root level. Container and subcontainers : The search occurs in the search root DN and all subcontainers. This is the same as selecting <i><Default></i> . Object : Limits the search to the object specified. This search is used to verify the existence of the specified object.
Max Search Entries	Specify the maximum number of search result entries you want returned for a search. Specify 0 if you want to use the runtime setting. Recommendations: Set it between 100 and 200 for greatest efficiency. Do not set it over 1000

3.7.4 Relationship Properties

Relationship properties include:

- ♦ [“Relationship Access Properties” on page 80](#)
- ♦ [“Relationship Properties” on page 81](#)

Relationship Access Properties

Table 3-22 Relationship Access Properties

Property Name	Description
Used by Organizational Chart	When selected, this relationship can be used by the Org Chart portlet.

Property Name	Description
Used by Management	<p>When selected, this relationship can be used to define the provisioning members in iManager.</p> <p>For example, if <i>Used by Management</i> is selected for the manager-employee relationship, then the provisioning application administrator can use this relationship to define the members as all users that report to the manager.</p> <p>If <i>Enable Cascading Relationship</i> is selected, then the can include several levels within the organization. You define the number of levels via <i>Maximum Levels to Cascade</i>.</p>

Relationship Properties

Table 3-23 Relationship Properties

Property Name	Description
Key	<p>The read-only unique identifier for the relationship.</p> <p>TIP: You specify this value in the Org Chart Portlet preference sheet.</p>
Display Label	<p>Specify a name to display when this relationship is displayed in the User Application. For example, this value is displayed when users click Choose Org Chart from the Detail portlet.</p> <p>Click Localize to provide the translation for the display label text.</p>
Source Entity	<p>Choose an entity from the drop-down list.</p> <p>The entity that you choose becomes the parent or source object in the organization chart hierarchy. In a Manager-Employee relationship, the Source Entity is User. For a Group-Member relationship, the source entity is Group.</p> <p>Directory abstraction layer requirements: The entities in this list are a subset of the entities defined in the directory abstraction layer. Source entities must have the view access property selected (True).</p>
Source Attribute	<p>Choose an attribute from the drop-down list.</p> <p>This attribute is used to find matching target entities. When the value of this attribute matches a corresponding value on an attribute of the target entity (see Target Attribute below), then a relationship can be established.</p> <p>Directory abstraction layer requirements: This list of attributes is populated using the selected Source Entity's attributes. It includes any attributes that are searchable and readable.</p>
Target Entity	<p>Choose an entity for the child object in the hierarchy. In a Manager-Employee relationship, it is user.</p> <p>This entity must contain the attribute that is related to the Source attribute.</p>

Property Name	Description
<i>Target Attribute</i>	Choose the attribute that matches the Source Attribute. This is the target entity's attribute used to find matching source entities. When the value of this attribute matches a corresponding value on the source entity (see Source Attribute above), then a relationship can be established.

NOTE: The Org Chart portlet does not fully support dynamic groups; you cannot define a dynamic group as the Source entity, but you can define a dynamic group as the target entity.

4 Configuring Provisioning Request Definitions

A provisioning request is a user or system action that initiates one or more provisioning workflows. These workflows can be used to grant or revoke resources or roles, or perform attestation processes. You use the provisioning request definition editor to create and deploy provisioning requests to the User Application driver. This section includes information about the provisioning request definitions shipped with the system and how to create new provisioning request definitions. It includes the following sections:

- ◆ [Section 4.1, “About Provisioning Request Definitions,” on page 83](#)
- ◆ [Section 4.2, “Using the Provisioning Request Definition Editor,” on page 84](#)
- ◆ [Section 4.3, “Provisioning and Workflow Example,” on page 102](#)

4.1 About Provisioning Request Definitions

Provisioning request definitions are directory objects that encapsulate the business rules for granting or revoking a corporate resource or role, and binding the corporate resource or role to a workflow. Provisioning request definitions can also be used to launch attestation workflows. They are used in the User Application to support:

- ◆ Resource requests on the *Requests & Approvals* tab

Resource requests allow users to request access to resources such as accounts, applications, servers, and so forth. Novell provides a read-only resource-oriented provisioning request definition named *Resource Approval*.

For information about customizing the existing definition or writing your own resource based provisioning request definitions, see [Section 6.7, “Guidelines for Creating Resource Based Workflows,” on page 201](#).

- ◆ Role assignment requests on the *Roles* tab.

Role assignment requests allow users to request roles that grant them permissions to resources and not to the resources themselves. Novell provides these two read-only role-oriented provisioning request definitions:

- ◆ *Role Approval*: Manages role requests.
- ◆ *SoD Conflict Approval*: Manages role requests that result in Separation of Duties (SoD) conflict overrides.

For information about customizing the existing definitions or writing your own roles based provisioning request definitions, see [Section 6.6, “Guidelines for Creating Roles Based Workflows,” on page 192](#).

- ◆ Attestation process requests on the *Compliance* tab.

Attestation process requests are used by Compliance Administrators and Attestation Officers to submit requests for attestation workflows. These workflows allow users to verify their own user profile information, to allow authorized users to verify the violations and exceptions to SoD constraints, or to verify role and user assignments.

Designer provides these two attestation type provisioning request definitions:

- ♦ *Attestation Report*: Manages the attestation process that allows users to verify the violations and exceptions for a set of SoD constraints.
- ♦ *Attestation User Profile*: Manages the attestation process that allows users to confirm that their user profiles contain accurate information.

Attestation type provisioning request definitions are not editable within Designer. You cannot define or use custom provisioning request definitions for attestation, and they are not visible on the *Requests & Approval* tab.

You use Designer to define the trustees for the attestation process requests, to deploy the provisioning request definitions, and to localize the text users see during the approval process. For information on localizing attestation provisioning request definition text, see [Section 2.10, “Localizing Provisioning Objects,”](#) on page 35.

4.2 Using the Provisioning Request Definition Editor

The provisioning request definition editor allows you to create provisioning request definitions that bind corporate resources or roles to a workflow. The provisioning request definition editor includes the following tools:

- ♦ **Overview tab**: Used to define the basic characteristics of the provisioning request.
- ♦ **Workflow tab**: Used to define the associated workflow by configuring activities and flow paths.
- ♦ **Form tab**: Used to define the request and approval forms that the user interacts with in the *Requests & Approvals* tab.
- ♦ **Signature Declarations tab**: Used to define the Digital Signature declarations.

For provisioning request definitions that are not based on roles, you can use a provisioning request template to create your definitions. The templates model some common workflow design patterns. However, if you want complete control over the behavior of your workflows, you can create your own custom provisioning request definitions.

- ♦ [Section 4.2.1, “Creating a Provisioning Request Definition,”](#) on page 84
- ♦ [Section 4.2.2, “Starting the Provisioning Request Definition Editor,”](#) on page 85
- ♦ [Section 4.2.3, “Creating a Provisioning Request Definition By Using a Template,”](#) on page 87
- ♦ [Section 4.2.4, “Creating a Custom Provisioning Request Definition,”](#) on page 93
- ♦ [Section 4.2.5, “Creating a Roles Based Provisioning Request Definition,”](#) on page 94
- ♦ [Section 4.2.6, “Modifying Settings of a Provisioning Request Definition,”](#) on page 96

4.2.1 Creating a Provisioning Request Definition

This section describes how to create both provisioning requests that are based on roles and provisioning requests that are not based on roles by using the following methods:

- ♦ From a template (not supported for roles based provisioning request definitions).
- ♦ From a copy of an existing provisioning request definition.
- ♦ As a custom provisioning request definition.

When possible, you should use a template or a copy of an existing definition because it saves you time, and allows you to make targeted changes to an existing provisioning request definition. However, if no existing provisioning request definition resembles new work that you want to do, you can create a custom provisioning request.

The following table describes the steps for defining a provisioning request.


Table 4-1 Basic Steps for Defining a Provisioning Request

Task	Action	For More Information
1	Create a provisioning request definition.	Depending on what you want to create, see: <ul style="list-style-type: none"> ◆ Section 4.2.3, “Creating a Provisioning Request Definition By Using a Template,” on page 87 ◆ Section 4.2.4, “Creating a Custom Provisioning Request Definition,” on page 93. ◆ Section 4.2.5, “Creating a Roles Based Provisioning Request Definition,” on page 94 ◆ Section 4.2.6, “Modifying Settings of a Provisioning Request Definition,” on page 96
2	Create the request and approval forms. TIP: Creating the forms before the workflow simplifies the process of mapping the form fields to the application data.	See Chapter 5, “Creating Forms for a Provisioning Request Definition,” on page 107
3	Create the workflow diagram by adding activities to the workflow diagram and connecting them with flow paths.	See Chapter 6, “Creating the Workflow for a Provisioning Request Definition,” on page 173
4	Configure the activities and flow paths by specifying the properties, data item mappings, and e-mail notification settings for the activities. Then define the semantics for the flow paths.	See Chapter 7, “Workflow Activity Reference,” on page 213

4.2.2 Starting the Provisioning Request Definition Editor


- 1 Open the Provisioning view and double-click the *Provisioning Request Definitions* node.

Designer displays the provisioning request definitions tree containing nodes for the default provisioning definition request definition categories of *Accounts*, *Attestations*, *Entitlements*, *Groups*, *Roles*, and *Uncategorized*.



These default categories are defined by the directory abstraction layer Provisioning Category list. For information on managing categories, see [Section 3.3, “Working with Lists,” on page 54](#). The installed templates are available in the Entitlements node, and the default role provisioning request definitions are available in the Roles node.

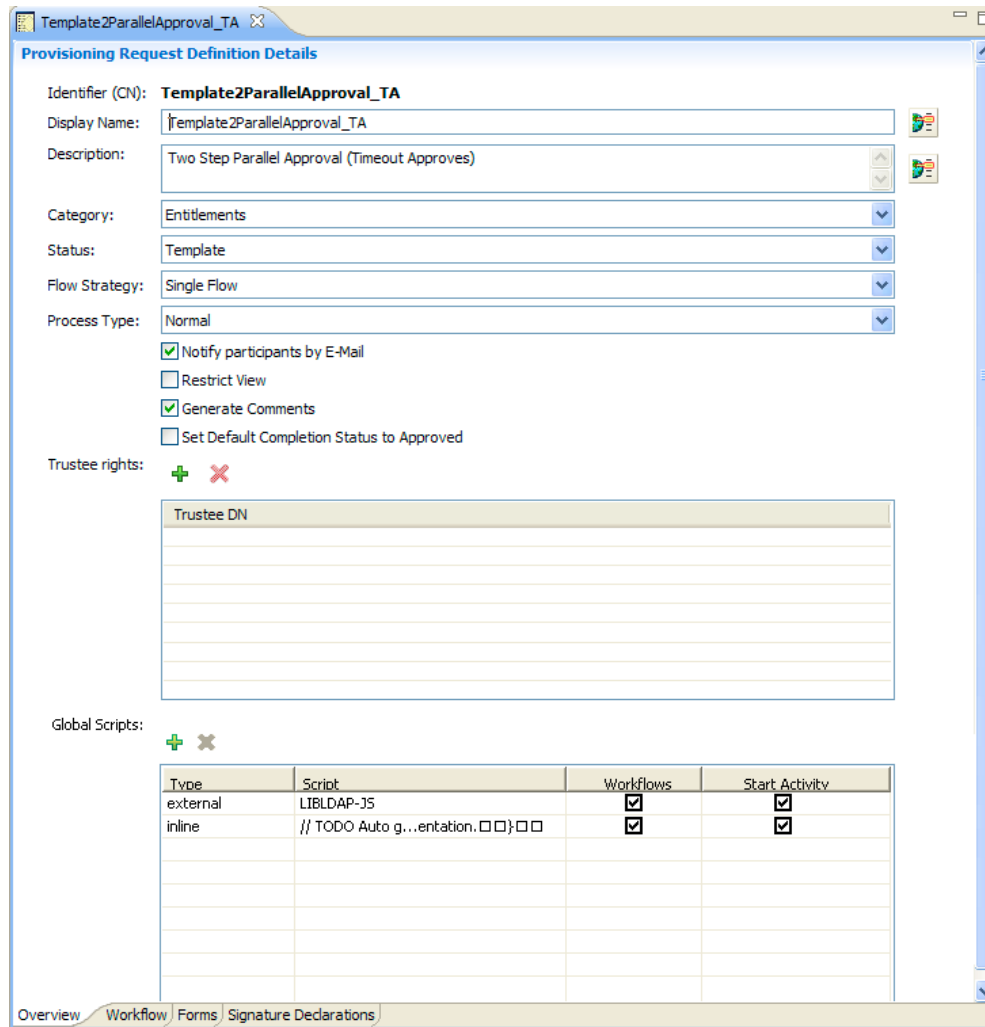- 2 Use the Provisioning view pane to navigate the provisioning request definition categories. The right-click menu is available from the top-level node or when you select an existing provisioning request definition. You cannot create a provisioning request definition by selecting a category node.
- 3 Double-click a provisioning request definition to open it in the editor in the right pane.



For details on using...	See
<i>Overview tab</i>	Section 4.2.6, “Modifying Settings of a Provisioning Request Definition,” on page 96.
<i>Workflow tab</i>	Chapter 6, “Creating the Workflow for a Provisioning Request Definition,” on page 173.
<i>Forms tab</i>	Chapter 5, “Creating Forms for a Provisioning Request Definition,” on page 107.
<i>Signature Declarations</i>	Section 6.11, “Configuring Digital Signature Support,” on page 210.

Provisioning request definitions are stored locally in the `Provisioning\AppConfig\RequestDefs` directory within your workspace.

4.2.3 Creating a Provisioning Request Definition By Using a Template

- 1 Launch the Create A New PRD wizard in one of these ways:
 - ♦ From the Provisioning view, right-click the *Provisioning Request Definitions* node and choose *New*.
 - ♦ From the Provisioning view, click a User Application or provisioning request container, then select *Insert > Provisioning Request Definition*.
 - ♦ Select *File > New > Provisioning > Provisioning Request Definition*. Choose *Provisioning Request Definition*, then click *Next*.


The first page of the Create a New PRD Wizard is displayed.

The screenshot shows a Windows-style dialog box titled "Create a new PRD". The main heading is "Specify the basic information of the Provisioning Request Definition." Below this, a smaller instruction reads "Give the PRD a CN name, a display name, and a description." There are three text input fields: "Identifier (CN):", "Display Name:", and "Description:". At the bottom of the dialog, there are four buttons: a help button (question mark in a circle), "< Back", "Next >", "Finish", and "Cancel".

- 2 Fill in the fields as follows:


Field	Description
<i>Identifier (CN)</i>	The CN (common name) identifier for the provisioning request definition. The name cannot be longer than 64 characters.
<i>Display Name</i>	The display name for the provisioning request definition. This is the name that is displayed in the Provisioning view.
<i>Description</i>	A description of the provisioning request definition.

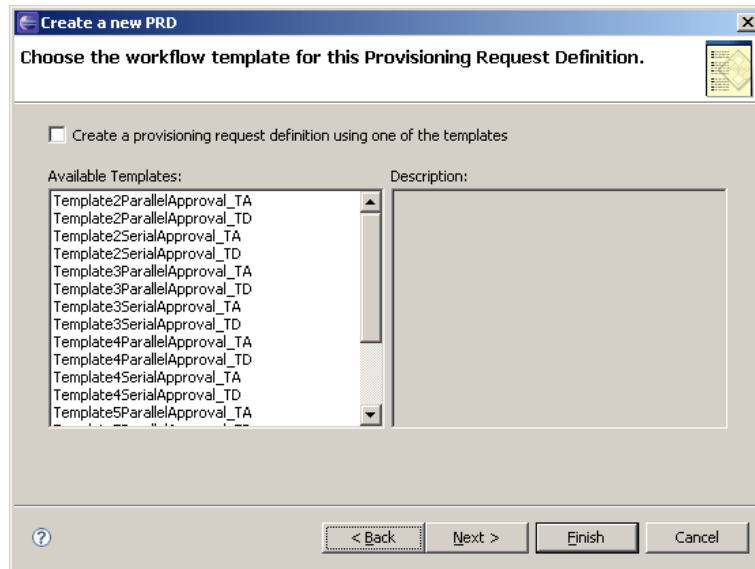- 3 Click *Next*. The next page of the wizard is displayed.



- 4 Select *Create a provisioning request definition using one of the templates*, then select the desired template (for example, *TemplateSingleApproval_TA*) from the *Available Templates* list, then click *Next*.

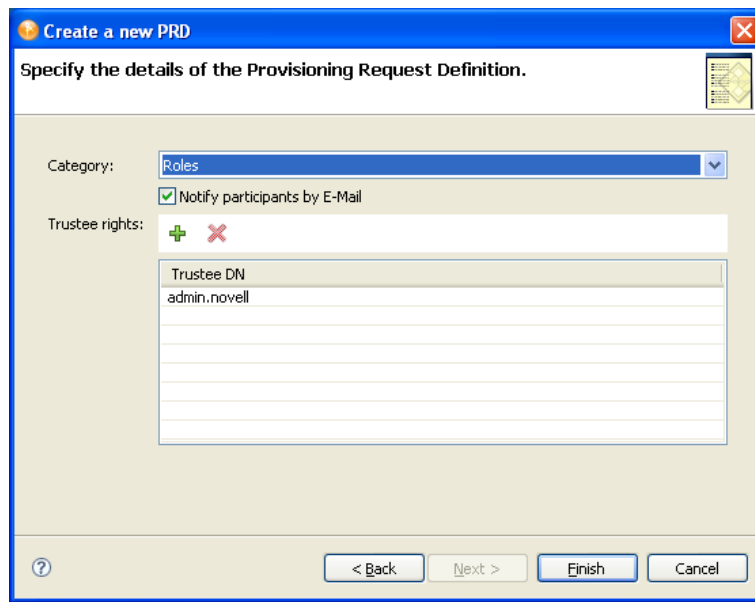You use the next panel of the wizard to specify the provisioning request definition's category and trustees (the users, groups, or containers) who can access the provisioning request definition after it is deployed.




- 5 Select a category from the list.
- 6 Select *Notify participants by e-mail* if you want approvers to be notified by e-mail about pending approval tasks, and also want initiators to be notified by e-mail of workflow completion. If *Notify participants by e-mail* is not selected, users must look at the *Requests and Approvals* tab in the User Application for notifications about tasks.
- 7 Click the plus (+) icon to add a trustee.

Designer displays a panel that allows you to browse the Identity Vault to select a trustee. You can select a user, group, or container. If you cannot connect to the Identity Vault, you can type trustee DNs directly in the *Trustee DN* field.
- 8 Select the trustee, then click *OK*.


Designer returns you to the previous panel. If desired, add additional trustees by repeating the previous step.
- 9 When you have finished adding trustees, click *Finish*.

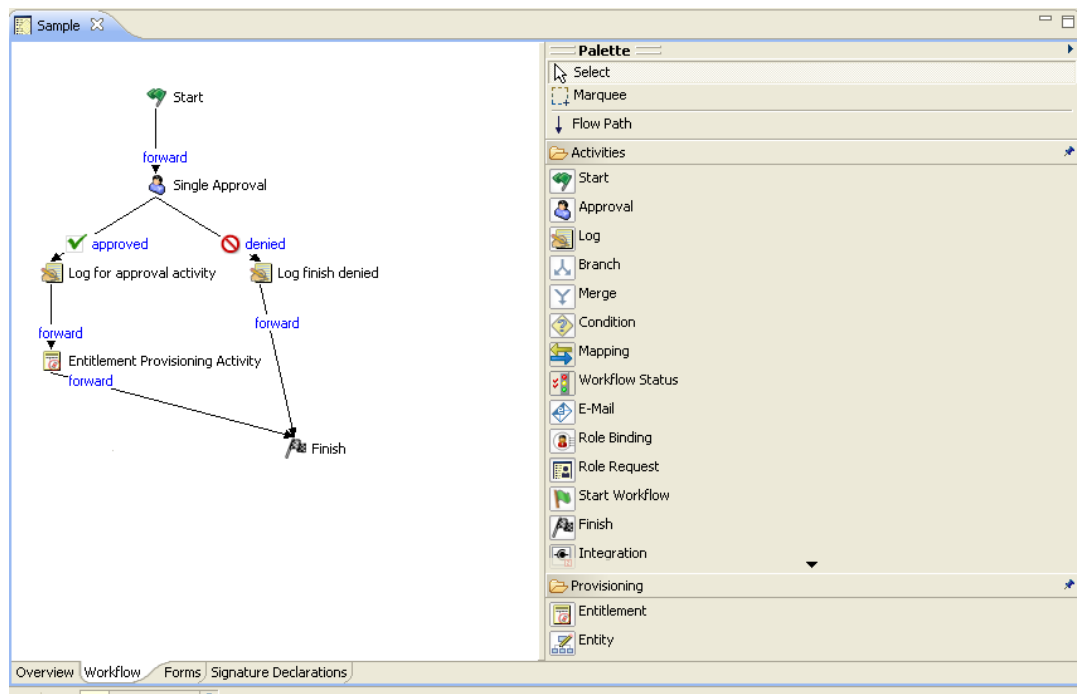Designer displays the Provisioning Request Definition Details panel on the *Overview* tab (see [Section 4.2.6, “Modifying Settings of a Provisioning Request Definition,”](#) on page 96).
- 10 Click the *Workflow* tab. The Workflow view is displayed.



The provisioning request definition template includes some default values that you must customize for your environment. For example, the Entitlement Provisioning Activity contains placeholder values for several data item mapping properties. You need to replace the placeholder values with the actual values for your provisioning request.

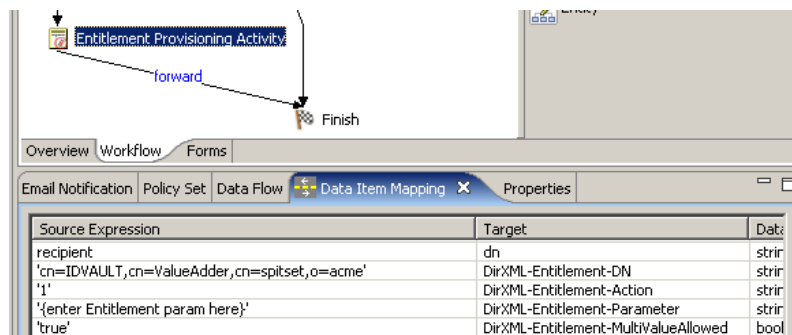- 11 Click the Entitlement Provisioning activity, then click the *Data Item Mapping* tab.



- 12 Double-click in the *Source Expression* field to display the *DirXML-Entitlement-DN* target field, then click the button that appears in the field to display the ECMA Expression Builder. See [Chapter 9, "Working with ECMA Expressions,"](#) on page 315 for information about the ECMA Expression Builder.
- 13 Use the ECMA Expression Builder to replace the placeholder expression with an expression that specifies the entitlement that you want to provision with this provisioning request.
- 14 Replace the placeholder expression in the *Source Expression* field for the *DirXML-Entitlement-Parameter*.
- 15 Click the *Forms* tab and customize the forms for the provisioning request to meet your needs.

See [Chapter 5, “Creating Forms for a Provisioning Request Definition,” on page 107](#). The template includes predefined request and approval forms. You might want to add additional forms, or add or remove form controls.

16 Click the *Workflow* tab and customize the properties of the workflow to your needs.

See [Chapter 6, “Creating the Workflow for a Provisioning Request Definition,” on page 173](#) and [Chapter 7, “Workflow Activity Reference,” on page 213](#).

For more information about the preconfigured templates, see the following:

- ♦ [“About the Installed Templates” on page 91](#)
- ♦ [“About the Installed Templates and Flow Strategy” on page 93](#)

About the Installed Templates

Identity Manager ships with a set of preconfigured provisioning request definitions and workflows. You can use these as templates for building your own provisioning system. To set up your system, you define new objects based on the installed templates and customize these objects to suit the needs of your organization.

The installed templates let you determine the number of approval steps required for the request to be fulfilled. You can configure a provisioning request to require from zero to five approval steps.

You can also specify whether you want to support sequential or parallel processing, and whether you want to approve or deny the request if the workflow times out during the course of processing.

The following table lists the templates included with Identity Manager.

Table 4-2 *Preconfigured Provisioning Request Definitions and Workflows*

Template	Description
Self Provision Approval	Allows a provisioning request to be fulfilled without any approvals.
One Step Approval (Timeout Approves)	Requires a single approval for the provisioning request to be fulfilled. If an activity times out, the activity approves the request and the work item is forwarded to the next activity.
Two Step Sequential Approval (Timeout Approves)	Requires two approvals for the provisioning request to be fulfilled. If an activity times out, the activity approves the request and the work item is forwarded to the next activity. This template supports sequential processing.
Three Step Sequential Approval (Timeout Approves)	Requires three approvals for the provisioning request to be fulfilled. If an activity times out, the activity approves the request and the work item is forwarded to the next activity. This template supports sequential processing.

Template	Description
Four Step Sequential Approval (Timeout Approves)	<p>Requires four approvals for the provisioning request to be fulfilled. If an activity times out, the activity approves the request and the work item is forwarded to the next activity.</p> <p>This template supports sequential processing.</p>
Five Step Sequential Approval (Timeout Approves)	<p>Requires five approvals for the provisioning request to be fulfilled. If an activity times out, the activity approves the request and the work item is forwarded to the next activity.</p> <p>This template supports sequential processing.</p>
One Step Approval (Timeout Denies)	<p>Requires a single approval for the provisioning request to be fulfilled. If an activity times out, the workflow denies the request.</p>
Two Step Sequential Approval (Timeout Denies)	<p>Requires two approvals for the provisioning request to be fulfilled. If an activity times out, the workflow denies the request.</p> <p>This template supports sequential processing.</p>
Three Step Sequential Approval (Timeout Denies)	<p>Requires three approvals for the provisioning request to be fulfilled. If an activity times out, the workflow denies the request.</p> <p>This template supports sequential processing.</p>
Four Step Sequential Approval (Timeout Denies)	<p>Requires four approvals for the provisioning request to be fulfilled. If an activity times out, the workflow denies the request.</p> <p>This template supports sequential processing.</p>
Five Step Sequential Approval (Timeout Denies)	<p>Requires five approvals for the provisioning request to be fulfilled. If an activity times out, the workflow denies the request.</p> <p>This template supports sequential processing.</p>
Two Step Parallel Approval (Timeout Approves)	<p>Requires two approvals for the provisioning request to be fulfilled. If an activity times out, the activity approves the request and the work item is forwarded to the next activity.</p> <p>This template supports parallel processing.</p>
Three Step Parallel Approval (Timeout Approves)	<p>Requires three approvals for the provisioning request to be fulfilled. If an activity times out, the activity approves the request and the work item is forwarded to the next activity.</p> <p>This template supports parallel processing.</p>
Four Step Parallel Approval (Timeout Approves)	<p>Requires four approvals for the provisioning request to be fulfilled. If an activity times out, the activity approves the request and the work item is forwarded to the next activity.</p> <p>This template supports parallel processing.</p>

Template	Description
Five Step Parallel Approval (Timeout Approves)	Requires five approvals for the provisioning request to be fulfilled. If an activity times out, the activity approves the request and the work item is forwarded to the next activity. This template supports parallel processing.
Two Step Parallel Approval (Timeout Denies)	Requires two approvals for the provisioning request to be fulfilled. If an activity times out, the workflow denies the request. This template supports parallel processing.
Three Step Parallel Approval (Timeout Denies)	Requires three approvals for the provisioning request to be fulfilled. If an activity times out, the workflow denies the request. This template supports parallel processing.
Four Step Parallel Approval (Timeout Denies)	Requires four approvals for the provisioning request to be fulfilled. If an activity times out, the workflow denies the request. This template supports parallel processing.
Five Step Parallel Approval (Timeout Denies)	Requires five approvals for the provisioning request to be fulfilled. If an activity times out, the workflow denies the request. This template supports parallel processing.

About the Installed Templates and Flow Strategy

By default, provisioning request definition templates use the *Single Flow* flow strategy. The templates assume that the recipient is a user DN. If you change the flow strategy, you must modify the template. If you change the flow strategy to:

- ♦ *Flow per member*: Remove the recipient reference from the request form.
- ♦ *Single flow provision members*: Remove the recipient from the request form and add logic to determine the addressee for the approval activity. The templates assume the recipient is a user DN, so you must determine if the recipient is a user or group DN. You can use the IDVault `isGroup(String dn)` method to determine if the DN is a group. If the recipient is a group DN, you must provide logic for assigning the approval activity addressee.

4.2.4 Creating a Custom Provisioning Request Definition

If no existing provisioning request definition resembles the new work that you want to do, then you need to build a custom provisioning request definition. You can still save time and effort by re-using forms from other workflows.

NOTE: The procedure in this section does not use roles. To create a custom roles based provisioning request definition, see [Section 4.2.5, “Creating a Roles Based Provisioning Request Definition,”](#) on page 94

- 1 Create the basic information for a new provisioning request definition (see [Section 4.2.3, “Creating a Provisioning Request Definition By Using a Template,”](#) on page 87). In step **Step 4** on page 88, do not select *Create a provisioning request definition using one of the templates*, and do not select a template. When you are finished, the *Overview* tab for the new provisioning request is displayed.
- 2 Create the forms for the provisioning request definition. Defining forms before you create the workflow topology ensures that data bindings can be set up automatically for each activity when you create activities.
To create the forms, see [Section 5.3, “Creating Forms,”](#) on page 114.
- 3 Click the *Workflow* tab and create the workflow topology.
You create the topology of a workflow by creating and linking activities into the desired workflow pattern, and by assigning rules to the flowpaths between activities. For information about creating a workflow topology, see [Chapter 6, “Creating the Workflow for a Provisioning Request Definition,”](#) on page 173.
- 4 Specify the details (properties, data item mappings, e-mail notification) for each workflow activity.
To specify workflow activity details, see [Chapter 7, “Workflow Activity Reference,”](#) on page 213.
- 5 Configure the flowpaths between workflow activities.
To configure flowpaths, see [Section 6.4, “Configuring Flow Paths,”](#) on page 182.

4.2.5 Creating a Roles Based Provisioning Request Definition

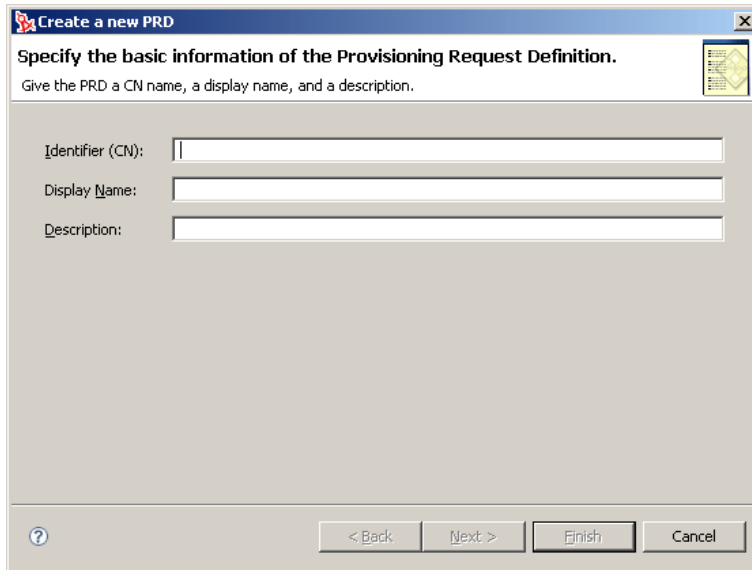
Designer supplies two Roles Based provisioning request definitions that you should use as a basis for your custom roles based provisioning request definitions. They are:

- ♦ Role Approval
- ♦ SoD Conflict Approval

To create a copy and customize its contents:

- 1 From the Provisioning view, open *Roles* in the *Provisioning Request Definitions* node.
- 2 Select one of the roles-based provisioning request definition (depending on which type of approval you want to create), right-click, then select *Create From*.
 - ♦ *Role Approval*: Choose this for role requests.
 - ♦ *SoD Conflict Approval*: Choose this for SoD conflict approval requests.


Designer displays the *Create a New PRD Wizard*.



3 Fill in the fields as follows:

Field	Description
<i>Identifier (CN)</i>	The CN (common name) identifier for the provisioning request definition. The name cannot be longer than 64 characters.
<i>Display Name</i>	The display name for the provisioning request definition. This is the name that is displayed in the Provisioning view.
<i>Description</i>	A description of the provisioning request definition.

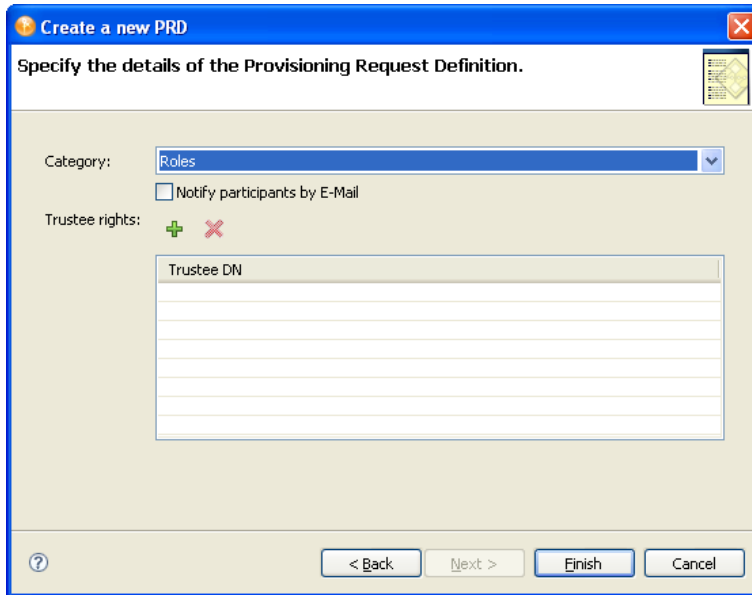4 Click *Next*. Designer displays the following dialog box.



5 Specify *Roles* for the category.

- 6 Select *Notify participants by e-mail* if you want approvers to be notified by e-mail about pending approval tasks, and also want initiators to be notified by e-mail of workflow completion. If *Notify participants by e-mail* is not selected, users must look at the *Roles* tab in the User Application for notifications about tasks.
- 7 (Optional) Click the plus (+) icon to add a trustee.

Designer displays a panel that allows you to browse the Identity Vault to select a trustee. You can select an individual trustee or a group. If you cannot connect to the Identity Vault, you can type trustee DNs directly in the *Trustee DN* field.
- 8 (Optional) Select the trustee, then click *OK*.

Designer returns you to the previous panel. Add additional trustees by repeating the previous step.
- 9 Click *Finish*.

Designer displays the Provisioning Request Definition Details panel on the *Overview* tab (see [Section 4.2.6, “Modifying Settings of a Provisioning Request Definition,” on page 96](#)).

For more details on defining the associated workflow, see [Section 6.6, “Guidelines for Creating Roles Based Workflows,” on page 192](#).


4.2.6 Modifying Settings of a Provisioning Request Definition

You use the *Overview* tab to define the basic information about the provisioning request definition (for example, the name of the provisioning request definition, the category to which it belongs, and who can access it).

- ♦ [“Modifying Basic Settings” on page 97](#)
- ♦ [“Modifying Properties of Attestation or Roles Based Provisioning Request Definitions” on page 101](#)

Modifying Basic Settings

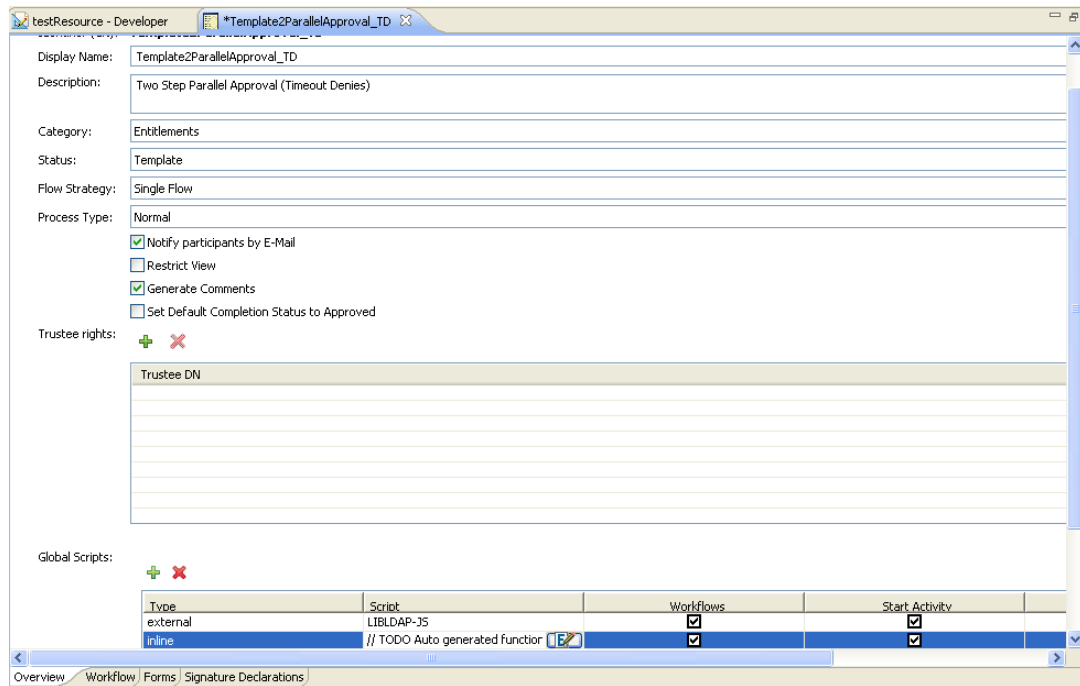Figure 4-1 Overview Tab



The following table describes each property that you can configure on the *Overview* tab.

Table 4-3 Overview Properties


Field	Description
<i>Identifier (CN)</i>	Displays the CN (common name) of the provisioning request definition. The CN cannot be changed.
<i>Display Name</i>	Specifies the display name of the provisioning request definition. This is the name that is displayed to the user in Designer and Identity Manager.
<i>Description</i>	Specifies the description of the provisioning request definition.
<i>Category</i>	Specifies the category to which the provisioning request definition belongs from the list of Provisioning Categories defined in the directory abstraction layer. The Provisioning view displays the provisioning request definitions by categories.

Field	Description
<i>Status</i>	<p>Specifies the status of the provisioning request definition:</p> <p>Active: Select this option to make the provisioning request definition available for use in the User Application.</p> <p>Inactive: Select this option to make the provisioning request definition temporarily unavailable for use in the User Application. You can use this option when you want keep the roles of the person who develops the provisioning request definition separate from the person who activates the provisioning request definition. For example, a developer could be responsible for marking the provisioning request definition as Inactive, and an administrator could be responsible for changing the status to Active.</p> <p>Template: Select this option if you want to use this provisioning request definition as the basis for other provisioning request definitions. Templates are not available for use in the User Application.</p> <p>Retired: Select this option to mark the provisioning request definition as permanently unavailable for use in the User Application (you can still change the status of the provisioning request definition at any time). This status provides a way of keeping a historical record of a provisioning request definition that is no longer in use.</p>
<i>Flow Strategy</i>	<p>Specifies the flow strategy for the provisioning request definition:</p> <p>Single Flow: This strategy allows one workflow with one recipient.</p> <p>Flow per member: This strategy allows the recipient to be a group DN. If you select this strategy, the User Application starts a workflow instance for each member of the group, and each workflow can be approved or denied separately. For example, assume there is a provisioning request definition for the recipient Human Resources. The Human Resource group has the members ablake and kchester. The User Application passes the Human Resources DN to the provisioning start. The provisioning interface starts two workflow instances, one for ablake and one for kchester.</p> <p>Single Flow Provision Members: This strategy allows the recipient to be a group DN. If you select this strategy, the User Application starts a single workflow for the group. The workflow spawns multiple provisioning steps (one for each member) within the single workflow. The workflow is approved or denied to the group as a whole, not for each individual member.</p>

Field	Description
<i>Process Type</i>	<p>Specifies the type of provisioning request definition. Values are:</p> <p>Normal: Used for typical workflow definitions that are not related to roles.</p> <p>Role Approval: Specify this type if the workflow is used for roles approvals. When this is set, the workflow is available to the Roles Configuration editor and the SoD Editor. It ensures that the NrfRequest object data item is available in the data item mapping.</p> <p>Resource Approval: Specify this type if the workflow is used for resource approvals. When this is set, the workflow is available to the Resource Editor. It ensures that the NrfResourceRequest object data item is available in the data item mapping.</p> <p>Attestation: Used by Compliance Administrators and Attestation Officers to submit requests for attestation workflows.</p> <p>WARNING</p> <ul style="list-style-type: none"> ◆ If you change the process type from <i>Role Approval</i> or <i>Resource Approval</i> to <i>Normal</i>, you must also remove any ECMA expressions related to the NrfRequest object. ECMA expressions related to the NrfRequest object are only valid in role based workflows and resource based workflows. Including these expressions in non-roles-related workflows or non-resource-related workflows cause runtime errors in the User Application. ◆ The driver must be Roles Based Provisioning 3.7 or higher.
<i>Notify participants by E-Mail</i>	<p>Specifies whether approvers are notified by e-mail about pending approval tasks, and whether initiators are notified by e-mail of workflow completion. If <i>Notify participants by email</i> is not selected, then users must look at the <i>Requests and Approvals</i> tab in the User Application for notifications about tasks.</p> <p>For information about selecting an e-mail template and customizing e-mail template parameters, see Section 7.15, "Finish Activity," on page 251.</p>
<i>Restrict View</i>	<p>Specifies that the list of tasks that can be viewed by the user in My Requests in the User Application is restricted to tasks initiated by the user. The default behavior (that is, <i>Restrict View</i> is not selected) is that the user can see any requests that the user initiated or for which the user is the recipient.</p>
<i>Generate Comments</i>	<p>Specifies that the workflow engine should generate comments as the workflow progresses. These comments can be displayed by clicking the following:</p> <ul style="list-style-type: none"> ◆ <i>View Comment and Flow History</i> in a <i>Request Detail</i> form in the User Application ◆ <i>View Comment History</i> in a <i>Task Detail</i> form in the User Application
<i>Set Default Completion Status to Approved</i>	<p>Specifies that the default completion status of the provisioning request is approved if selected, or denied if not selected. This feature can be useful for provisioning requests that do not contain a provisioning activity (an Entitlement or Entity). The value of this parameter can be overridden by explicitly setting the completion status by using a Provisioning activity or Workflow Status activity.</p>
<i>Trustee Rights</i>	<p>Specifies the users and groups that can use the provisioning request definition.</p>
<i>Global Scripts</i>	<p>Specifies the global ECMA scripts that provisioning request definition imports while working with workflows and forms. Inline or external scripts can be added by specifying the type of the script. You can also specify when these scripts should be available to you. These scripts can be available on workflows, start activity, or forms.</p>

Designer allows you to modify the properties of more than one provisioning request definition at a time. The provisioning request definitions must be of the same category. You will see a different set of properties for provisioning request definitions whose categories are Attestations or Roles. See [“Modifying Properties of Attestation or Roles Based Provisioning Request Definitions” on page 101.](#)

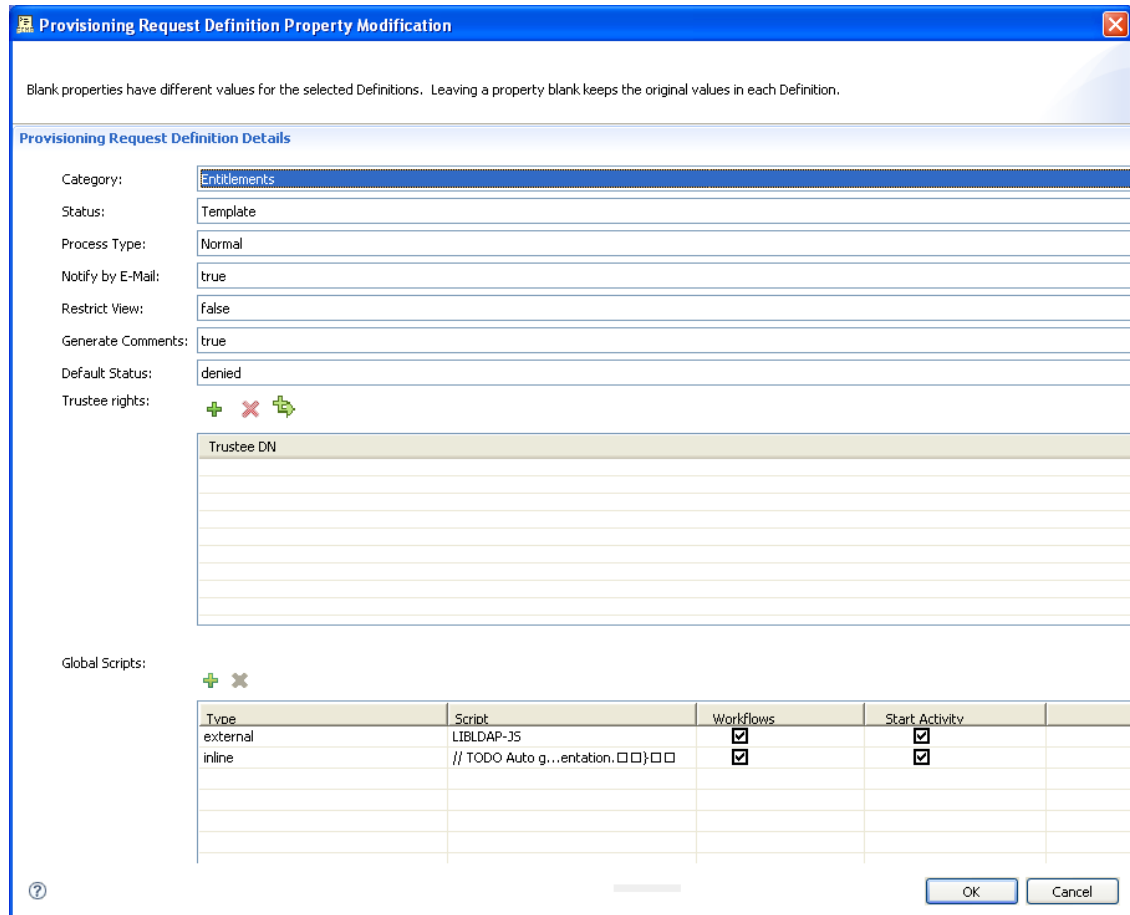- 1 With the Provisioning view open, select one or more provisioning request definitions, right-click, then select *Properties*. A dialog box like the following displays (the properties you can modify depend on the type of provisioning request definitions you have selected):



- 2 Modify the selected provisioning request definitions as desired by changing the value for that property.
If you have selected multiple provisioning request definitions and one of the properties does not contain a value, the corresponding field is blank. If you modify that field, then the value you specify is applied to all of the selected provisioning request definitions.
- 3 For Trustees, delete, add, or merge the values for the selected provisioning request definitions.
A merge adds all of the trustees in the selected provisioning request definitions to all of the selected provisioning request definitions.
- 4 For Global Scripts, delete, add, or modify the values for the selected provisioning request definitions.
 - ♦ **External:** The script is incorporated into the provisioning request definition by reference using the supplied ECMA Script DN.

- ◆ **Inline:** The script is inserted directly into the provisioning request definition in a `<script>` block. You add your JavaScript using this ECMAScript Editor. To learn more about using the editor, click the editor's help button. For inline scripts, the following is inserted in the page:

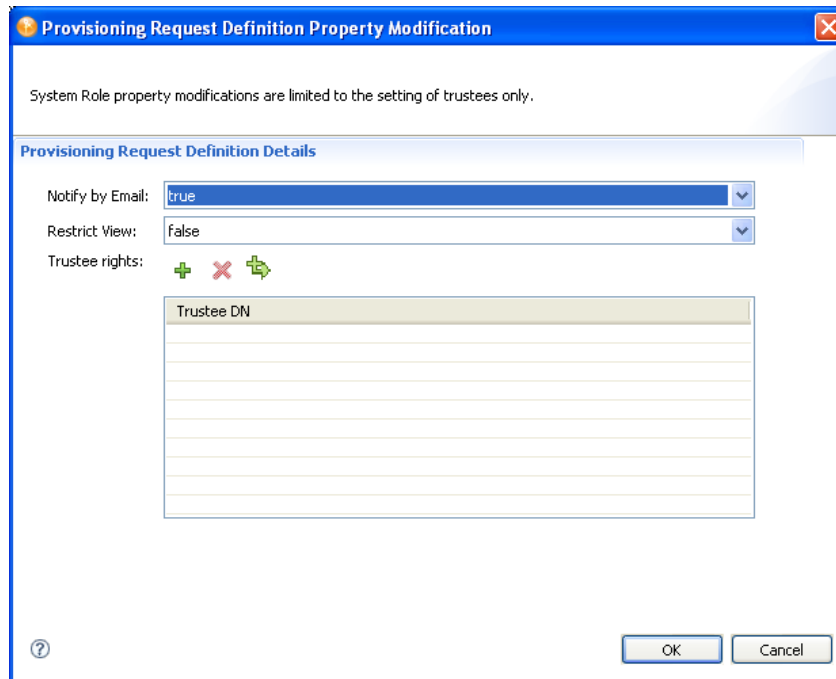
```
<script>whatever you type</script>
```

- 5 Click *OK* to save your changes.

Modifying Properties of Attestation or Roles Based Provisioning Request Definitions

The provisioning request definitions that support Attestations and Roles cannot be opened in the Provisioning Request Definition editor so you cannot set their properties by using the *Overview* tab. You can set several important properties, such as Trustee Rights, before deploying them.

- 1 With the Provisioning view open, select one (or more) of the Roles or Attestation provisioning request definitions, right-click, then select *Properties*.



- 2 Fill in the fields as follows:

Field Name	Description
<i>Notify by E-Mail</i>	Specifies whether approvers are notified by e-mail about pending approval tasks, and whether initiators are notified by e-mail of workflow completion. If <i>Notify participants by email</i> is not selected, then users must look at the <i>Requests and Approvals</i> tab in the User Application for notifications about tasks. For information about selecting an e-mail template and customizing e-mail template parameters, see Section 7.15, "Finish Activity," on page 251 .

Field Name	Description
<i>Restrict View</i>	Specifies that the list of tasks that can be viewed by the user in My Requests in the User Application is restricted to tasks initiated by the user. The default behavior (that is, <i>Restrict View</i> is not selected) is that the user can see any requests that the user initiated or for which the user is the recipient.
<i>Trustee Rights</i>	Specifies the users and groups that can use the provisioning request definition.

- 3 For Trustees, delete, add, or merge the values for the selected provisioning request definitions. A merge adds all of the trustees in the selected provisioning request definitions to all of the selected provisioning request definitions.
- 4 For Global Scripts, delete, add, or modify the values for the selected provisioning request definitions.
- 5 Click *OK* to save your changes.

4.3 Provisioning and Workflow Example

This section describes a common provisioning and workflow scenario. It is designed to help you understand how the different objects that you create with the provisioning request editor are used by the User Application.

Suppose a user needs an account on an IT system. To set up the account, the user initiates a request through the Identity Manager User Application. This request starts a workflow, which coordinates an approval process. When the necessary approvals have been granted, the request is fulfilled. The process includes four basic steps:

- ♦ [Section 4.3.1, “Step 1: Initiating the Request,” on page 102](#)
- ♦ [Section 4.3.2, “Step 2: Approving the Request,” on page 103](#)
- ♦ [Section 4.3.3, “Step 3: Fulfilling the Request,” on page 106](#)
- ♦ [Section 4.3.4, “Step 4: Completing the Workflow,” on page 106](#)

4.3.1 Step 1: Initiating the Request

In the Identity Manager User Application, the user browses a list of resources by category and selects one to provision. In the Identity Vault, the selected provisioned resource is associated with a provisioning request definition. The provisioning request definition is the most prominent object in a provisioning system. It binds a provisioned resource to a workflow and acts as the means by which the workflow process is exposed to the end user. The provisioning request definition provides all the information required to display the initial request form to the user and to start the flow that follows the initial request.

In this example, the user selects the New Account resource. When the user initiates the request, the Web application retrieves the initial request form and the description of the associated initial request data from the Provisioning System, which gets these objects from the provisioning request definition.

When a provisioning request is initiated, the Provisioning System tracks the initiator and the recipient. The initiator is the person who made the request. The recipient is the person for whom the request was made. In some situations, the initiator and the recipient can be the same individual.


Each provisioning request has an operation associated with it. The operation specifies whether the user wants to grant or revoke the resource.

4.3.2 Step 2: Approving the Request

After the user has initiated the request, the Provisioning System starts the workflow process, which coordinates the approvals. In this example, two levels of approvals are required, one from the user's manager and a second from the manager's supervisor. If approval is denied by any user in a workflow, the flow terminates and the request is denied.


Workflows can process approvals sequentially or in parallel. In a sequential workflow, as shown in the following figure, each approval task must be processed before the next approval task begins.

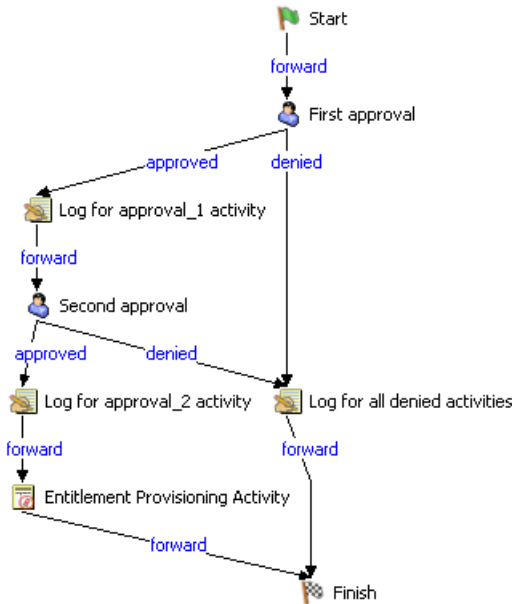Figure 4-2 Sequential Workflow with Two Approvals



In a parallel workflow, as shown in the following figure, users can work on the approval tasks simultaneously.

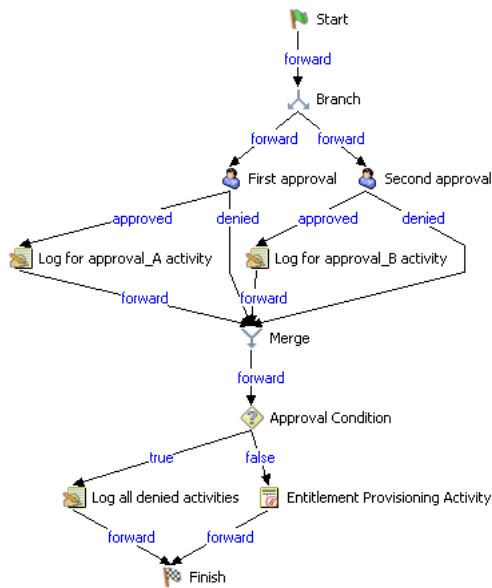Figure 4-3 Parallel Workflow with Two Approvals



NOTE: The display labels (First approval, Second approval, and so on) can easily be changed to suit your application requirements. For parallel flows, you might want to specify labels that do not imply sequential processing. For example, you might want to assign labels such as One of Three Parallel Approvals, Two of Three Parallel Approvals, and so on.

The workflow definition is made up of the components shown in the following table:

Table 4-4 Workflow Definition Components

Process Component	Description
Activities	<p>An activity is an object that represents a task. An activity can present information to the user and respond to user interactions. It can also perform background functions that are not visible to the user.</p> <p>In a workflow diagram, the activities are represented by boxes.</p> <p>In the Identity Manager User Application, the activities that handle the approval process are referred to as tasks. An end user can see the list of tasks in his or her queue by clicking <i>My Tasks</i> in the <i>My Work</i> group of actions. To see which workflow activities have been processed for a particular task, the user can select the task and click the <i>View Comment History</i> button on the Task Detail form.</p> <p>To see which workflow activities have been processed for a particular provisioning request, the user can click <i>My Requests</i>, select the request, and click the <i>View Comment and Flow History</i> button on the Request Detail form.</p> <p>For more information on the <i>My Tasks</i> and <i>My Requests</i> actions, see the <i>Identity Manager 3.6.1 User Application: User Guide</i>.</p>

Process Component	Description
Flow paths	<p>Flow paths tie the activities in a workflow together. A flow path represents a path to be followed between two activities.</p> <p>An activity can have multiple incoming flow paths and multiple outgoing flow paths. When an activity has more than one outgoing flow path, the flow path selected often depends on the outcome of the activity. The outcome is the end result of processing performed by the activity. For example, an approval activity can have an outcome of approved or denied, depending on the action taken by the user.</p> <p>In a workflow diagram, the flow paths are represented by arrows.</p>

Start activity: The workflow process begins with the execution of the Start activity. This activity displays the initial request form to the user. After the user has provided the initial request data, it initializes a work document using this data. The Start activity also binds several system values, such as the initiator and recipient, so that these can be used in script expressions.

Approval activities: After the Start activity finishes, the Workflow System forwards processing to the first Approval activity in the flow. The Approval activity sends an e-mail to the approver, notifying this user that his or her attention is needed. When the user claims the task, the Approval activity displays an approval form, which gives the user the ability to act on the request. In the workflow examples shown in [Section 4.3.2, “Step 2: Approving the Request,” on page 103](#), “First approval” and “Second approval” are examples of Approval activities. The display labels for Approval activities can be localized to satisfy international requirements.

An Approval activity has five possible outcomes, each represented by a different flow path exiting the activity:

- ◆ Approved
- ◆ Denied
- ◆ Refused
- ◆ Error
- ◆ Timeout

NOTE: The Error and Timeout outcomes can occur without any action being taken by the user.

If the user approves the request, the workflow follows the approved flow path to the next activity in the flow. If no further approvals are needed, the resource can be provisioned. If the user denies the request, the workflow follows the denied flow path to the next activity in the flow. Alternatively, the user can reassign the task (if he or she is an Organizational Manager or User Application Administrator), which puts the task in another user’s queue.

The user to whom an Approval activity has been assigned is referred to as the addressee. The addressee for an activity can be notified of the assigned task via e-mail. To perform the work associated with the activity, the addressee can click the URL in the e-mail, find the task in the work list (queue), and claim the task.

The addressee must respond to an Approval activity within a specified amount of time; otherwise, the activity times out. Typically the timeout interval is expressed in hours or days to allow the user sufficient time to respond.

When an activity times out, the workflow process might try to complete the activity again, depending on the escalation count specified for the activity. In some situations, the workflow process might be configured to escalate an activity that has timed out. In this case, the activity is reassigned to

a new addressee (the user's manager, for example) to give this user an opportunity to finish the work of the activity. If the last retry times out, the activity might be marked as approved or denied, depending on how the workflow was configured.

Log activity: The Log activity is a system activity that writes messages to a log. To log information about the state of a workflow process, the Workflow System interacts with Novell Audit. During the course of its processing, a workflow might log information about various events that have occurred. Users can use the Novell Audit reporting tools to look at logging data.

Branch and Merge activities: In a workflow that supports parallel processing, the Branch activity allows two users to act on different areas of the work item in parallel. After the users have completed their work, the Merge activity synchronizes the incoming branches in the flow.

Condition activity: During the course of execution, a workflow process might perform a test and check the outcome to see what to do next. The Condition activity provides this capability. Condition activities use a scripting expression to define the condition to evaluate. In the workflow examples shown in [Section 4.3.2, "Step 2: Approving the Request," on page 103](#), "Approval Condition" is an example of a Condition activity.

The Condition activity supports three possible outcomes or exit paths:

- ♦ True
- ♦ False
- ♦ Error

4.3.3 Step 3: Fulfilling the Request

When a provisioning request has been approved, the Workflow System can begin the provisioning step. At this point, control passes back to the Provisioning System.

To fulfill the provisioning request, the Provisioning System can execute an Identity Manager entitlement or directly manipulate an Identity Vault object and its attributes. These actions are performed by either the Entitlement activity or the Entity activity:

- ♦ **Entitlement activity:** Fulfills the provisioning request by granting or revoking an entitlement. This activity is not usually executed unless all of the necessary approvals are given.
- ♦ **Entity activity:** Fulfills the provisioning request by directly manipulating an eDirectory object and its attributes. This activity is not normally executed unless all of the necessary approvals are given.

4.3.4 Step 4: Completing the Workflow

When all other activities have terminated, the workflow executes the Finish activity, which is the final activity in a workflow. When all the activities in a flow have been completed and the final result of the flow is available, the Finish activity executes. The Finish activity sends a final e-mail notification to inform participants of the completion of the workflow.

5 Creating Forms for a Provisioning Request Definition

This section provides details on creating and customizing the User Application's request and approval forms. Topics include:

- ♦ [Section 5.1, "About Forms," on page 107](#)
- ♦ [Section 5.2, "About the Forms Tab," on page 110](#)
- ♦ [Section 5.3, "Creating Forms," on page 114](#)
- ♦ [Section 5.4, "Action Reference," on page 123](#)
- ♦ [Section 5.5, "Form Control Reference," on page 125](#)
- ♦ [Section 5.6, "Working with Distinguished Names," on page 163](#)
- ♦ [Section 5.7, "Using DAL Queries in Forms," on page 165](#)
- ♦ [Section 5.8, "Printing Forms," on page 170](#)
- ♦ [Section 5.9, "Providing Direct Access to a Form," on page 171](#)

5.1 About Forms

Forms allow the user to request a resource, approve a resource request, and work on a task. They are available when the user chooses any of the actions in the *My Work* category of the User Application's *Requests and Approvals* tab. Forms are also available directly from a URL. For details on this technique, see [Section 5.9, "Providing Direct Access to a Form," on page 171](#).

[Figure 5-1](#) is an example of a resource request form. At the top of the form is a read-only area that displays the details of the request (or approval for approval forms). In the *Form Detail* section at the bottom, the user provides input to the resource request (or approval) and takes some action on it.

Figure 5-1 Sample Form

The screenshot shows the Novell Identity Manager interface. The top navigation bar includes 'Novell Identity Manager', 'Welcome, Allison', 'Identity Self-Service', 'Requests & Approvals', 'Logout', and 'Help'. The date 'Friday, June 30, 2006' is displayed in the top right. A sidebar on the left contains a menu with items: 'My Work', 'My Tasks', 'Request Resource', 'My Requests', 'My Settings', 'Enter Proxy Mode', 'Edit Availability', 'My Proxy Assignments', and 'My Delegate Assignments'. The main content area is titled 'Request Resource' and contains the following text: 'Step 3 of 3: Confirm and complete resource request. * - indicates required.' Below this, the form fields are: 'Resource: Title Change Request', 'Recipient: Allison Blake', 'Resource Category: Accounts', and 'Description: Allow a user to request a title change. Requires manager approval.' A section titled 'Form Detail' contains a sub-section 'One Step Approval (Timeout Approves)' with the instruction 'Press 'Submit' to request the entitlement.' The form fields in this section are: 'Recipient: Allison Blake', 'Current Title: NewTitle', 'Requested New Title: [empty]', and 'Reason for request: * [empty]'. At the bottom of this section are 'Submit' and 'Cancel' buttons.

You use the *Forms* tab of the provisioning request definition editor to define the appearance and behavior of the *Form Detail* section of the User Application's requests and approvals forms.

About Request Forms

You can create one request form for a provisioning request definition. The request form is associated with the workflow's [Start Activity](#).

Figure 5-2 Sample Resource Request Form

This screenshot is identical to Figure 5-1, showing the 'Request Resource' form in the Novell Identity Manager interface. It displays the same navigation elements, sidebar menu, and form fields for a 'Title Change Request' for 'Allison Blake'. The 'Form Detail' section includes the 'One Step Approval' instruction and the input fields for 'Current Title', 'Requested New Title', and 'Reason for request', along with 'Submit' and 'Cancel' buttons.

About Approval Forms

You can define multiple approval forms for a provisioning request definition, but only one form per [Approval Activity](#). You can specify the approval form to associate with an approval activity in the properties for the activity. You can create an approval form via the *Forms* tab or from the approval activities property sheet.

Figure 5-3 Sample Resource Approval Form

The screenshot shows a web-based approval form interface. On the left is a navigation menu with categories like 'My Requests', 'My Settings', 'My Team's Work', and 'My Team's Settings'. The main content area displays details for a 'Title Change Request' resource. It includes fields for 'Requested By' (Allison Blake), 'Recipient' (Allison Blake), 'Task' (Single Approval), 'In Queue since' (06/30/2006 12:32:18 PM), and 'Timeout on' (03/17/2026 12:32:18 PM). The 'Assigned To' field shows 'Margo MacKenzie' and 'Claimed By' is empty. Below these are buttons for 'Claim', 'Release', 'Reassign', and 'Back'. The 'Form Detail' section is titled 'Single Approval' and contains the instruction 'Please select the appropriate button to approve or reject the request.' It features a table with 'Requested by: Allison Blake' and 'Recipient: Allison Blake'. Below the table are input fields for 'Request Date' (06/30/2006), 'Reason' (Test), 'Current Employee Title' (NewTitle), and 'Requested Title Change' (Marketing Assistant). A 'Comment:' field is also present with a 'View Comment History' button at the bottom.

5.1.1 About Form Control Data Binding

All of the fields you define for a form are automatically available for data binding in the Data Item Mapping property sheet. Two bindings, or mappings, are possible for each form field: a pre-activity mapping to initialize or pre-load a form field with data, and a post-activity mapping to move modified form data into the workflow document called flowdata. These data-item bindings, and any script expressions they use, execute on the application server as preparation of the form before it is sent to the client browser for display to the user. Common uses for pre-activity data-item mappings and their expressions that operate against the flow-data document are for moving previous approval data into the current approval or for setting default values for fields. For more information on data item mappings, see [Section 6.2.2, “Defining the Data Item Mappings,”](#) on page 180.


Some form controls allow you to initialize their values from data sources other than workflow data. For example, some list controls allow you to specify the initial value as a property of the control. For more information about defining initial values, see [Section 5.5, “Form Control Reference,”](#) on page 125.

5.1.2 About Forms and Events

Designer allows you to define action scripts that execute on the form control's `onLoad`, `onChange`, or custom events. Each form control supports an Events property where you supply the script for the event. The scripts you define have an event-level scope and execute in the browser of the user's client machine.

The Events property provides access to Designer's Event Action Expression Builder, which allows you to create script expressions that refer to and modify form and data. Because form control event scripts execute in the client browser, they do not have access to the flow-data document. They do have access to directory abstraction layer queries.

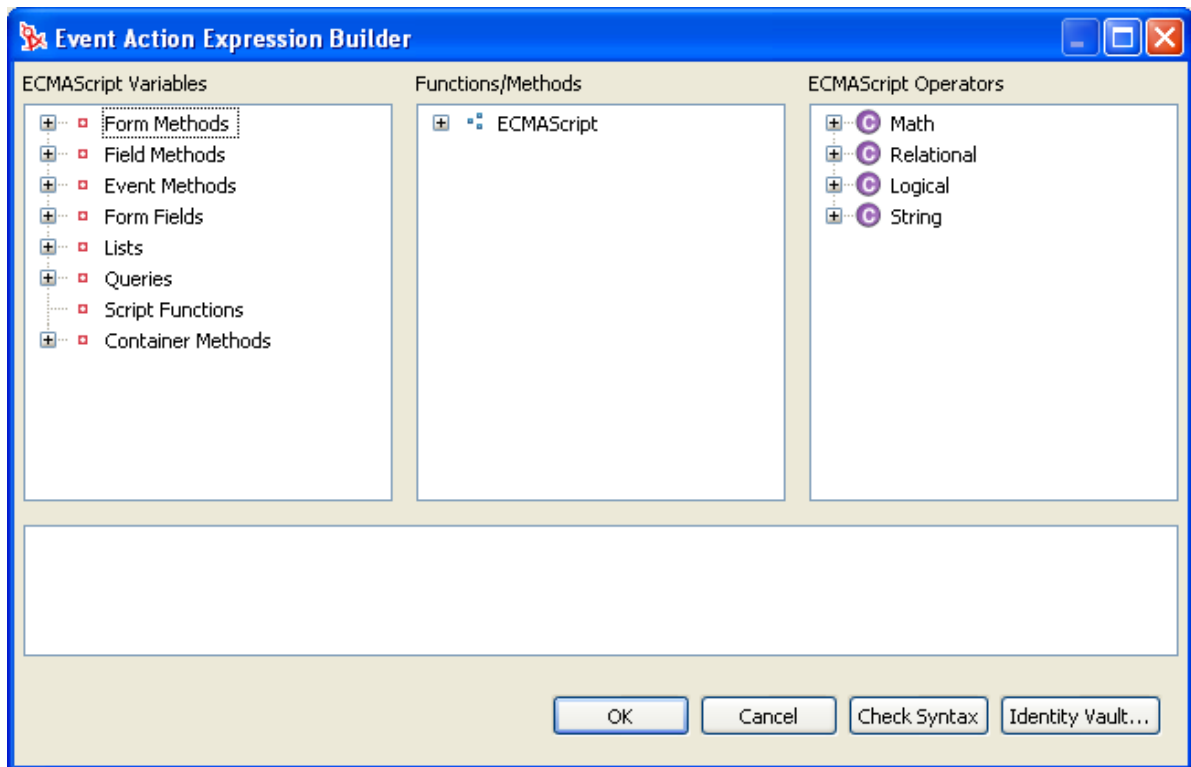Figure 5-4 Event Action Expression Builder




The Event Action Expression Builder also provides access to the Form Action methods (shown in the left column). This column provides access to the form action script API along with directory abstraction layer query objects. The form action script API is written in JavaScript so that you can add conditions, loops, and user-defined functions. For more information about the Form Action API, see [Section 9.3.1, "Form Action Script Methods,"](#) on page 326. To import or include a JavaScript library, you use the *Scripts* tab of the Form Controls area. For more information, see [Section 5.3.4, "Using the Scripts Tab,"](#) on page 121.

5.2 About the Forms Tab

You use the *Forms* tab of the provisioning request definition editor to define the appearance and behavior of your request and approval forms.

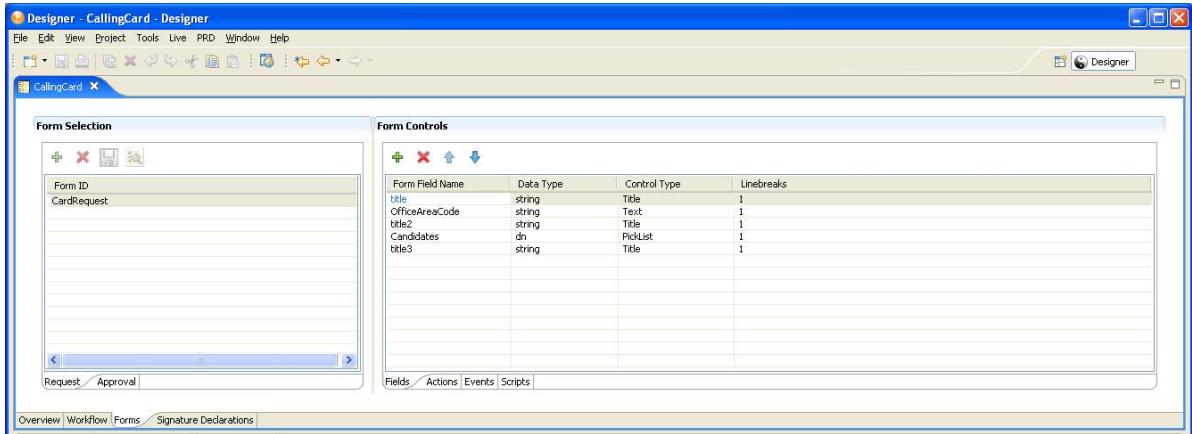Figure 5-5 Forms Tab




The *Forms* tab contains a *Form Selection* section and a *Form Controls* section.

- ◆ [Section 5.2.1, “About Form Selection,” on page 111](#)
- ◆ [Section 5.2.2, “About Form Controls,” on page 112](#)

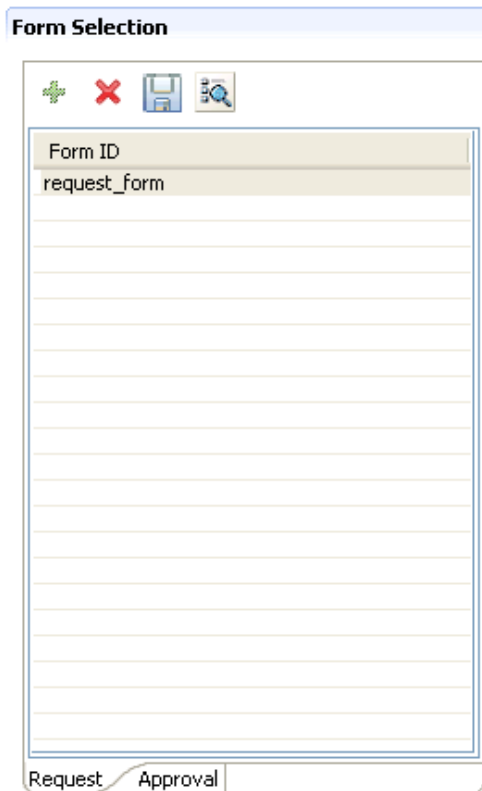5.2.1 About Form Selection





Use the *Form Selection* section to create, delete, or preview a form, or to create a form template. Click the *Request* or the *Approval* tab depending on the type of form you want to manipulate.

Figure 5-6 Form Selection



The *Form Selection* toolbar contains these options:

Table 5-1 *Form Selection Toolbar Options*


Button	Description
	Click to launch the New Form Wizard.
	Click to delete an existing form.
	Click to save the form as a template. You can then base other forms on this template. Forms are saved as XML documents in the project directory. Templates are available only within the project in which you create them.
	Click to preview the form.

If you create a provisioning request definition from an existing template, and the template has forms associated with it, the *Form Controls* section displays them. You can modify the form instance by using the *Form Controls* section.

5.2.2 About Form Controls

Use the *Form Controls* section to define or modify the form's appearance and behavior.

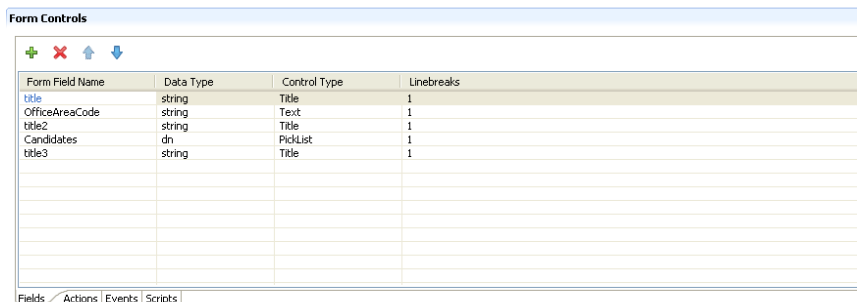
- ◆ *Fields* tab: Lets you add, delete, and change the data type, control type, and layout order of the controls on the form.




Form Field Name	Data Type	Control Type	Linebreaks
title	string	Title	1
OfficeAreaCode	string	Text	1
title2	string	Title	1
Candidates	dn	PickList	1
title3	string	Title	1

For information about adding controls, see [Section 5.3, "Creating Forms,"](#) on page 114. For more information about individual form controls, see [Section 5.5, "Form Control Reference,"](#) on page 125.

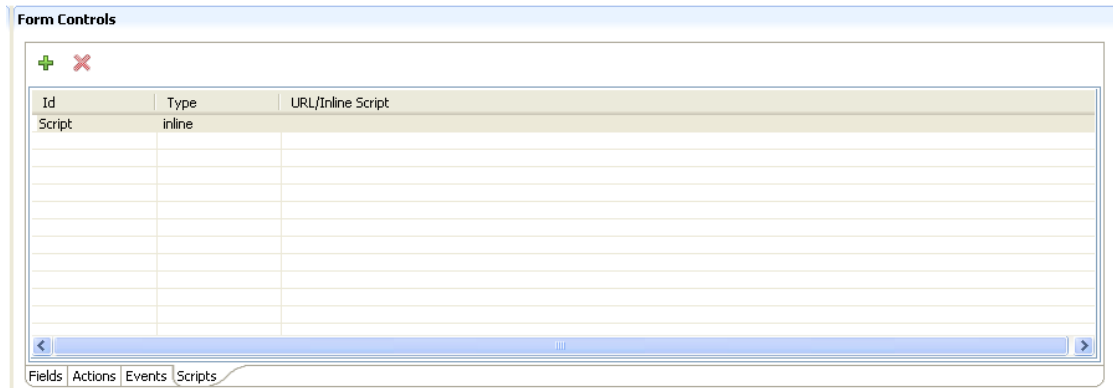- ◆ *Actions* tab: Lets you define the actions the user can perform on the form. Use the *Actions* toolbar to add, delete, and change the actions and layout order of the actions on the form.



- ◆ *Events* tab

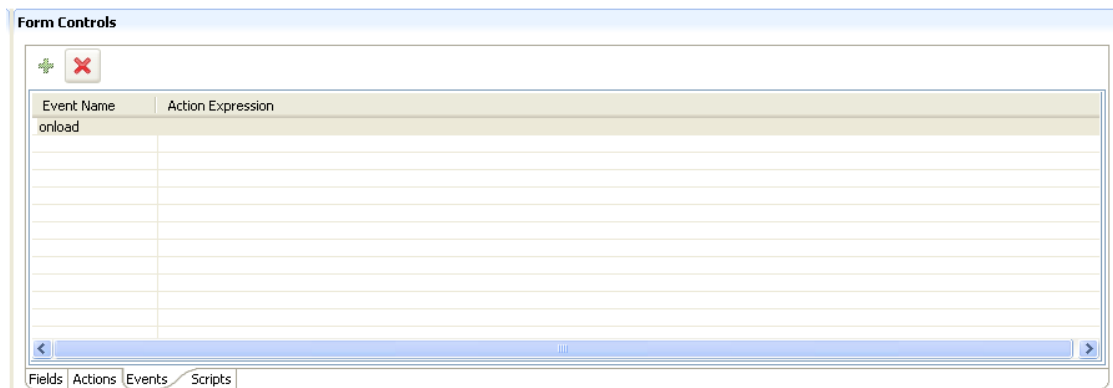


5.3 Creating Forms

This section describes how to create new forms and add controls to them. It includes these topics:

- ◆ [Section 5.3.1, “Creating New Forms,”](#) on page 114
- ◆ [Section 5.3.2, “Adding Form Controls and Actions,”](#) on page 115
- ◆ [Section 5.3.3, “Defining Events,”](#) on page 117
- ◆ [Section 5.3.4, “Using the Scripts Tab,”](#) on page 121

5.3.1 Creating New Forms

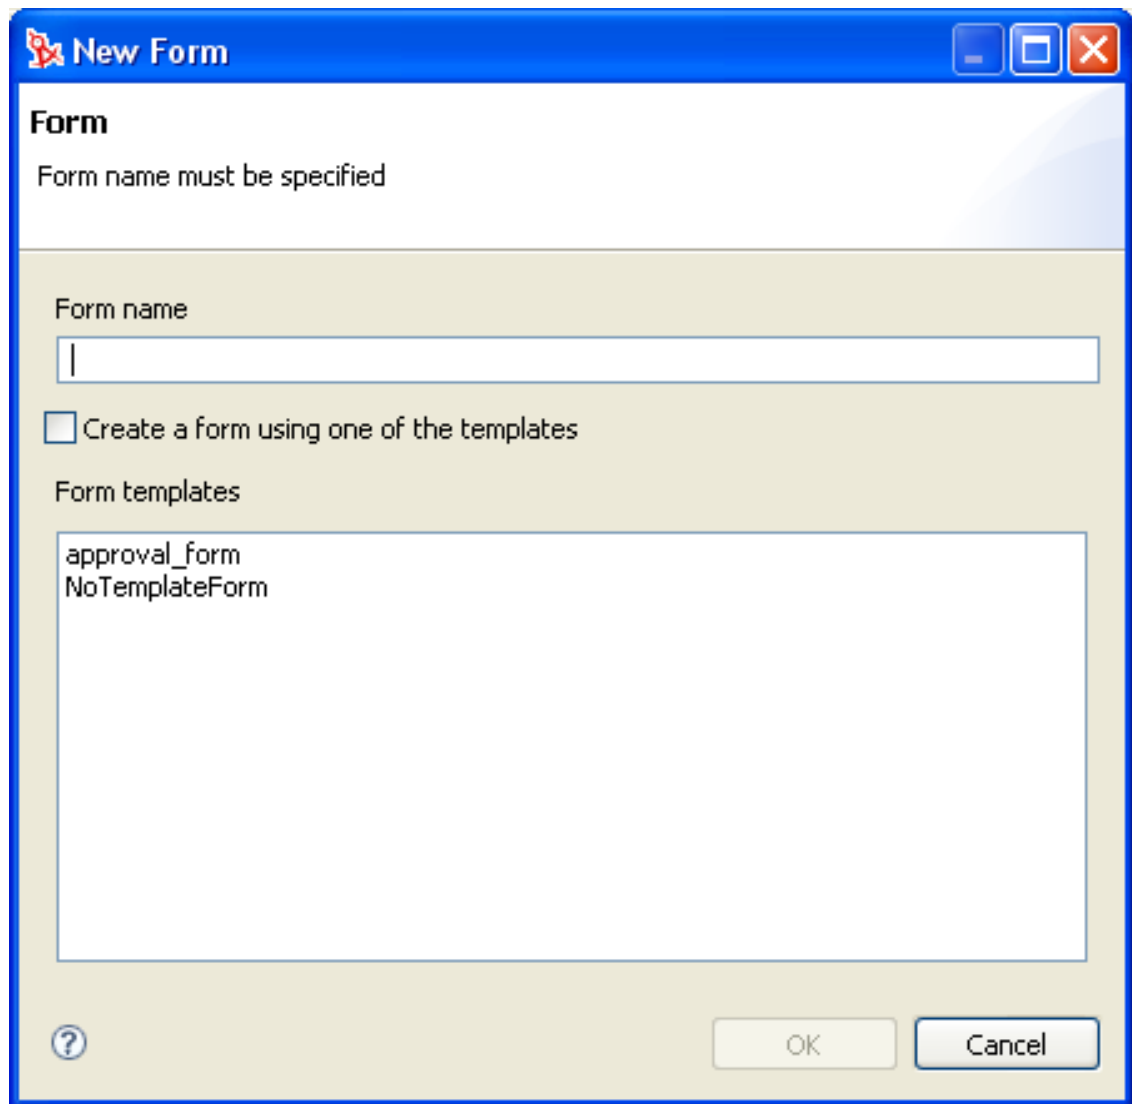- 1 With the provisioning request definition editor open, click the *Forms* tab.
- 2 In the *Form Selection* section of the page, click *Add* to access the New Form Wizard.



3 Fill in the fields as follows:

Field	Description
<i>Form Name</i>	Type the name of the form as you want it to appear in Designer.
<i>Create a form using one of the templates</i>	If you want to base the new form on an existing template, select this option and select one of the forms from the Form templates list.

4 Click *OK* to save the form or click *Cancel* to exit without saving.

5.3.2 Adding Form Controls and Actions

Use the *Form Controls* section to define the content and layout of the form.

NOTE: The Designer places form controls on the form from top to bottom and left to right. Use Linebreaks to force spacing between controls

To add a control to a form:

- 1 Click *Add*. Designer adds a control named `Field` to the bottom line of the form.
If you add more than one control of the same name to the form, Designer adds a unique number to the end of the control name.
- 2 Define the following properties for the control:

Field	Description
<i>Form Field Name</i>	A unique name for the field. The name is used in several different locations: <ul style="list-style-type: none">◆ The <i>Workflow</i> tab's <i>Data Item Mapping</i> dialog box.◆ The <i>ECMA expression builder</i> dialog box.◆ An internal XML reference in the provisioning request definition file. Consider the naming conventions you want to use for form fields, in order to avoid confusion in the Data Item Mapping and ECMA Expression Builder dialog boxes. For example, the request and approval forms might both contain a field called <i>Reason</i> . To make it clear which field you are working with while performing data mappings, you can preface the field name with the name of the form where it is used. You might name one reason field <i>Req_Reason</i> and the other <i>App_Reason</i> .
<i>Data Type</i>	The field's data type. The data type determines the valid control types and the type of validation performed.
<i>Control Type</i>	The type of visual control used to display or edit the data. The selection list is filtered based on the selected data type.
<i>Linebreaks</i>	Defines the number of lines you want inserted after the control.

Form field controls do not have Data Item Mappings or E-mail notifications property sheets.

- 3 For each control, specify its properties in the *Properties* tab (available via *Window > Show View > Properties*). For more information, see [Section 5.5, "Form Control Reference," on page 125](#).
- 4 Click the *Actions* tab to define what the user can do with the form. For example, you can add actions that allow the user to submit a form or cancel it.
A request form must have, at a minimum, a `SubmitAction`. Without a `SubmitAction`, the request does not process. Every form should have a `CancelAction`. Each approval form must have at least one action defined.
- 5 In the *Actions* page, click *Add* to add a new Action. Fill in the fields as follows:

Field	Description
<i>Actions Location</i>	<p>Choose the location for the action buttons you add to the form.</p> <p><i>Bottom.</i> Places the action buttons on the bottom of the form. (Default.)</p> <p><i>Top:</i> Places the action buttons on the top of the form.</p> <p><i>Top and Bottom:</i> Places the buttons at both the top and bottom of the form.</p>
<i>Action Command</i>	<p>Choose an action for the button. For more information, see Section 5.4, “Action Reference,” on page 123.</p>
<i>Linebreaks</i>	<p>Defines the number of lines you want inserted after the action button.</p>

6 Save the form.

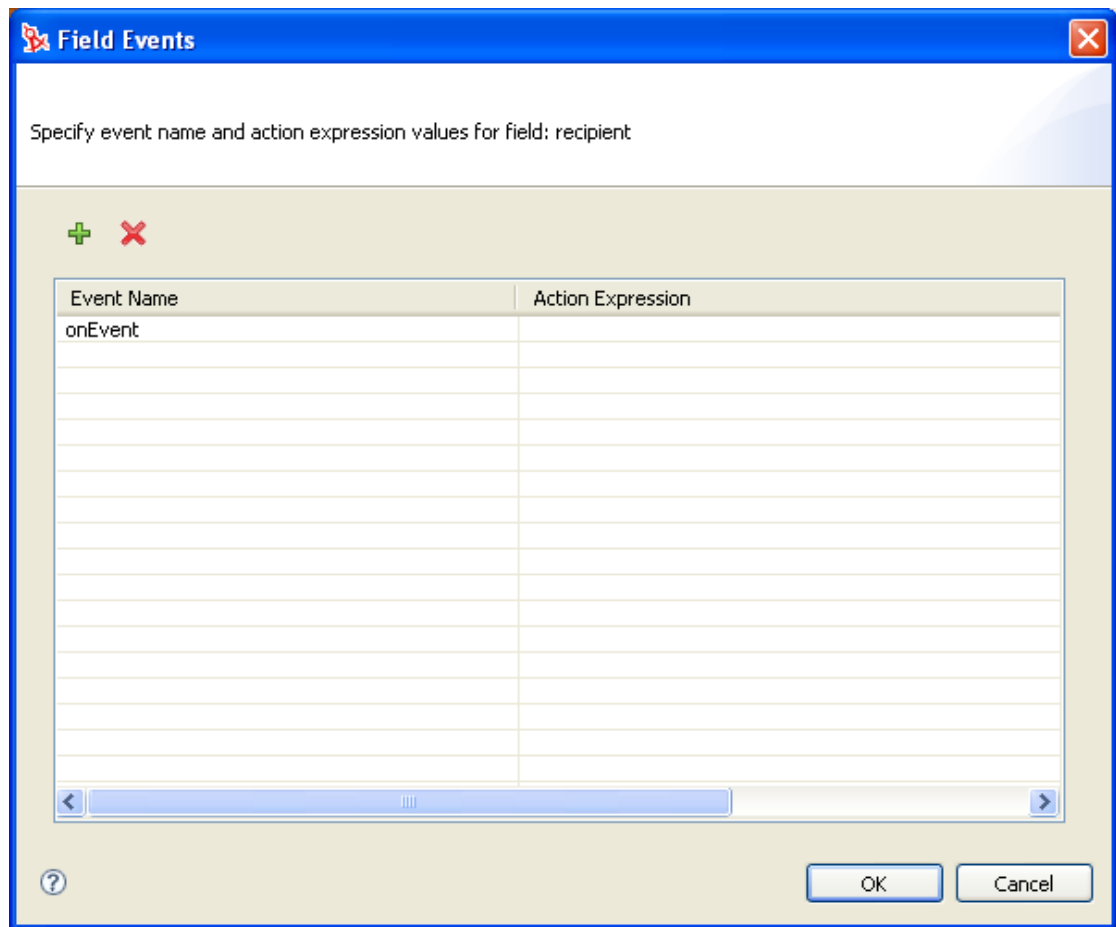
5.3.3 Defining Events

The scripts you attach to an event handler are scoped to the appropriate control, not the browser window.

- ♦ [“Defining an Event” on page 117](#)
- ♦ [“Creating Custom Events” on page 118](#)

Defining an Event

- 1 Select the form control where you want to define an event and open the property sheet.
- 2 Navigate to the Event property and add an event. Designer adds a row with the default event name *onEvent*.



- 3 Click the *Event Name* field and select the *onchange* or *onload* event. For more information on adding other events, see [“Creating Custom Events” on page 118](#).
- 4 Click the *Action Expression* field. You can type the script directly in this field, or click the button to access the *Event Action Expression Builder*.
- 5 Define the action script, check the syntax, then click *OK*. Repeat this procedure to add more events to this control.


For more information on the *onChange* and *onLoad* events, see the events property description in [Section 5.5.4, “General Form Control Properties,” on page 128](#).

Creating Custom Events

You can create your own events to notify other controls of conditions or user actions on the form. You create the event using the *Events* property. You can give the event any name. You must explicitly fire the event by using the `fireEvent()` method and passing in the name of the event.


You might want to perform a query on the Groups container that returns only the groups that match the values entered by a user. In the example shown in [Figure 5-7](#), the user types a value in the name field. When the user tabs to the next field, the contents of the drop-down list are populated from a query launched by the *namechange* custom event.

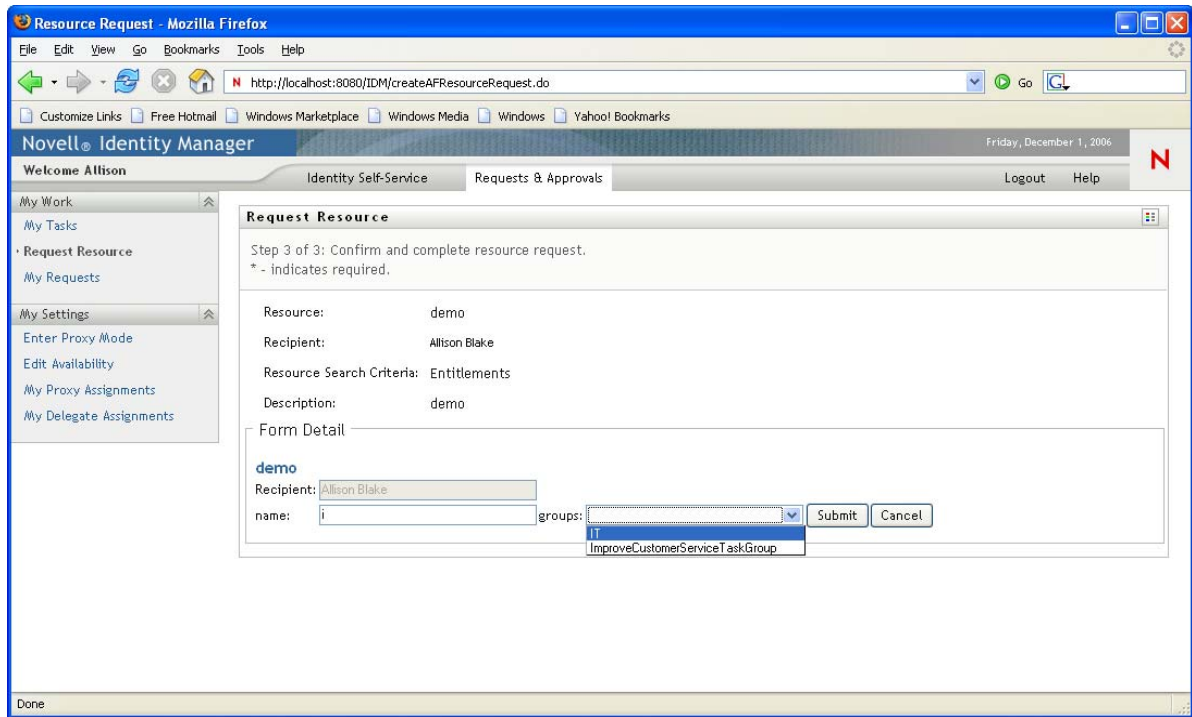Figure 5-7 User Application Runtime Custom Event Sample




The *Name* field defines an *Events* property that fires the *namechange* event on an *onchange* event. The definition is shown in [Figure 5-8](#).

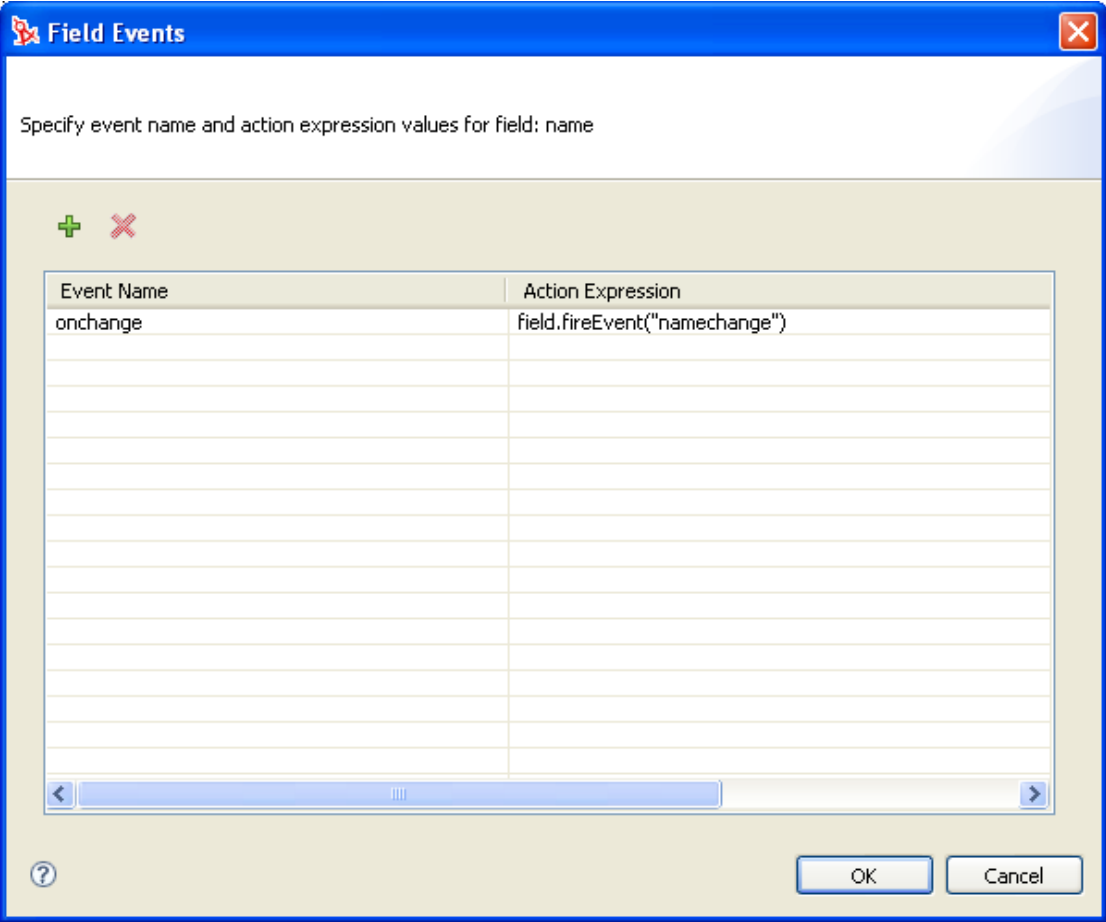Figure 5-8 Sample field.FireEvent() Method



The *namechange* event contains an expression that executes a query called *groups*.

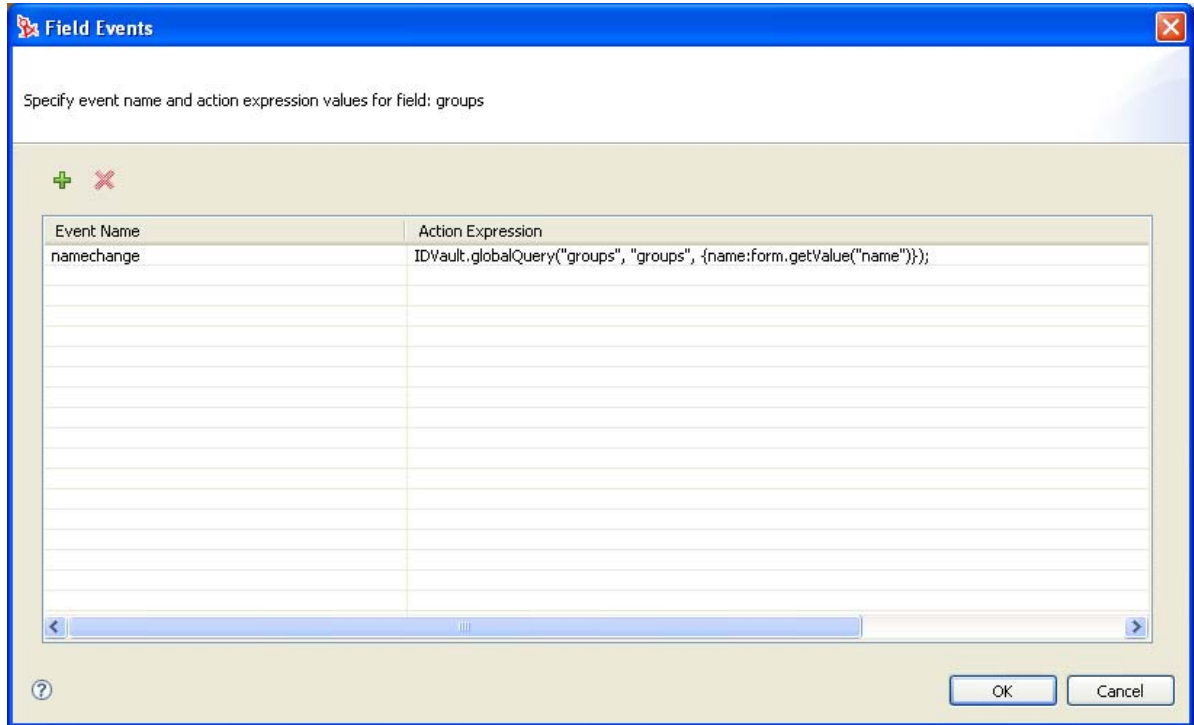Figure 5-9 Custom Event Definition Example



For more information on using queries, see [Section 5.7, “Using DAL Queries in Forms,”](#) on page 165.

5.3.4 Using the Scripts Tab


Use the *Scripts* tab to define a script that has a page-level scope. A page-level scope means that the script loads at page load time and is available through the life of the form. You can supply the script in one of the ways described in [Table 5-2](#).

Table 5-2 Script Types

Script Type	Description
<i>external</i>	The script is incorporated into the page by reference, using the supplied URL. The script block will look something like this: <code><script type="text/javascript" src="http://some.server/custom.js"></script></code> . The <code>custom.js</code> file is imported at form load.
<i>inline</i>	The script is inserted directly into the form in a <code><script></code> block.


Because these scripts are loaded at page load, the form controls and any of their associated event handler scripts are not in scope when the page is loaded. Avoid coding dependencies between page-level scripts and event-level scripts; however, you can call page-level scripts from within an event-level script.

To add a link to an external JavaScript file:

- 1 With the Scripts tab open, click *Add* .
- 2 Complete the fields as follows:

Field	Description
<i>ID</i>	Specify a meaningful name. This value displays in the Event Action Expression Builder.
<i>Type</i>	Select <i>external</i> .
<i>URL/Inline Script</i>	Click within the field so that the <i>ECMAScript Editor</i> button displays to the right, then click the button to display the editor as a dialog box.

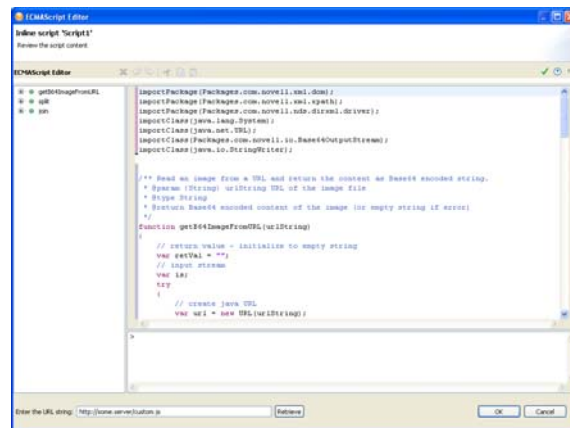Type the URL to the .js file in the *Enter the URL String* field, then click *Retrieve*. The script is fetched and displays in read-only mode. You can inspect the script, but you cannot change it.




When you add an external link to a form, only the link is stored and deployed, for example:

```
<script src="someURL.com/script.js"/>
```

TIP: Designer cannot validate this external reference. You must ensure that it is accessible at runtime.

To create an inline script:


- 1 With the *Scripts* tab open, click *Add* .
- 2 Complete the fields as follows:

Field	Description
<i>ID</i>	Specify a meaningful name. This value displays in the Event Action Expression Builder.
<i>Type</i>	Select <i>inline</i> .

Field**Description**

URL/Inline Script

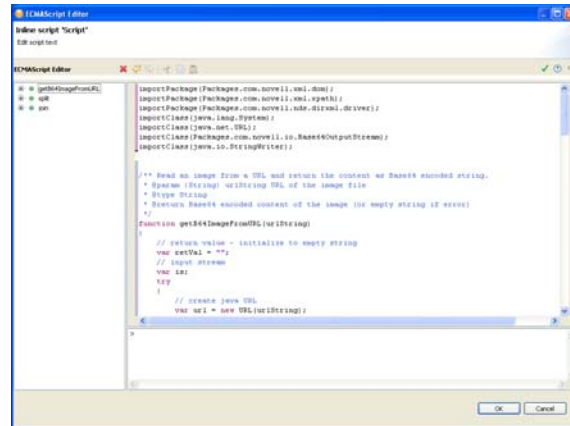Click within the field so that the *ECMAScript Editor* button displays to the right, then click the button to display the editor as a dialog box.



You add your JavaScript by using this ECMAScript Editor. To learn more about using the editor, click the editor's help button.

For inline scripts, the following is inserted in the page:

```
<script>whatever you type</script>
```


Both inline and external scripts are executed at page load but before the page loads the controls. In addition, they are also executed when specifically called on a form control event.

5.4 Action Reference

This section describes the actions you can add to forms. The actions are implemented as buttons. You can specify a custom display label for each button.

Table 5-3 Valid Actions

Action Name	Form Type	Description
<i>ApprovalAction</i>	Approval	Causes the Approval activity to complete and follow the <i>approved</i> flow path to the next activity. When you use this action, you must set the Hide If Read Only form property to True; otherwise the form fails validation when you submit it. TIP: An ApprovalAction requires the Approval Activity associated with the form to have an approved flow path exiting the activity.
<i>CancelAction</i>	Request and Approval	For request forms, Cancel returns the user to the Request Resource Search Criteria form. For approval forms, Cancel returns the user to the My Tasks list.

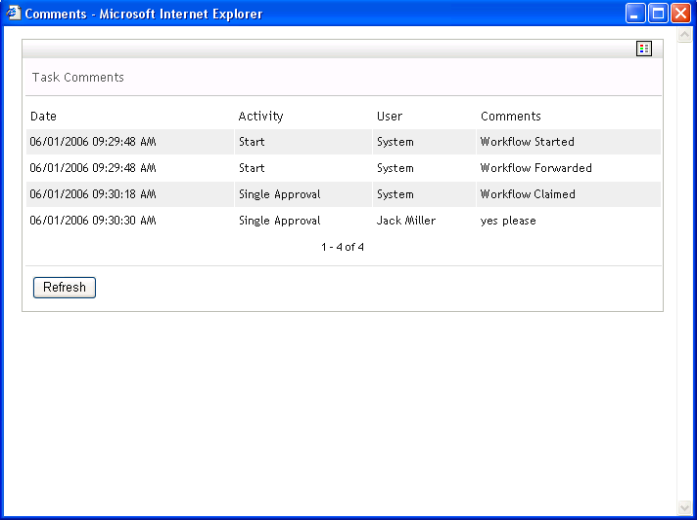Action Name	Form Type	Description
<i>CommentAction</i>	Approval forms	Generates a button with the default label set to <i>View Comment History</i> . The button launches a Comments dialog box displaying the processing history for each activity from the workflow start to the present time. Data displayed includes Date, Activity Name, User, and Comment as shown in the following example.
		
		<p>Comments are updated and persisted to the workflow database through the UpdateAction.</p> <p>NOTE: Any forms containing this action must also contain a field named <i>apwaComment</i>.</p>
<i>DenyAction</i>	Approval	<p>Causes the Approval activity to complete and follow the denied flow path. When you use this action, you must set the Hide If Read Only form property to True; otherwise, the form fails validation when you submit it.</p> <p>TIP: A DenyAction requires the Approval Activity associated with the form to have a deny flow path exiting the activity.</p>
<i>RefusalAction</i>	Approval	<p>Causes the Approval activity to complete and follow the refused flow path. When you use this action, you must set the Hide If Read Only form property to True; otherwise, the form fails validation on submit.</p> <p>TIP: A RefusalAction requires the Approval Activity associated with the form to have a refusal flow path exiting the activity.</p>
<i>SubmitAction</i>	Request and Approval	Initiates the workflow and causes the workflow to execute the forward flow type. The workflow passes any user-entered data to the next activity in the workflow.

Action Name	Form Type	Description
<i>UpdateAction</i>	Approval	Causes the Approval activity to write a user comment to the workflow database. There is typically a text area associated with an <i>apwaComment</i> form field. If the user enters text in this field and clicks this action, it is persisted to the <i>afcomment</i> table in the workflow database. The comment can be retrieved and viewed through the <i>CommentAction</i> (described above). The following example shows a text area and an update action button (labeled <i>UpdateAction</i>):

NOTE: The form must contain a field named *apwaComment*; otherwise, the provisioning request definition fails validation.

For more information about *apwaComment*, see [Section 5.5.3, “Controls for User-Entered Comments,”](#) on page 127.

The following table describes the properties you can set on actions.

Table 5-4 *Action Properties*

Property Name	Description
<i>Display Label</i>	Specifies the text to display on the button.
<i>Visible</i>	If True, specifies whether the action is visible at runtime.
<i>Block On Error</i>	If True, specifies that the action is blocked if any of the form's controls fail validation. This is recommended for the <i>SubmitAction</i> . You should not set it to False if the action button submits data; otherwise, invalid data can be submitted, causing unexpected results. Designer does not allow you to set this property to False for the <i>ApprovalAction</i> , <i>DenyAction</i> , or <i>RefusalAction</i> .
<i>Hide If Read Only</i>	If True, specifies that the action is hidden when the form is read-only. A form can be read-only when the user opens a task without claiming it first. If your form contains the <i>ApprovalAction</i> , <i>DenyAction</i> , or <i>RefusalAction</i> , this property must be set to True. If it is set to False, you encounter a validation error and cannot deploy the form.

5.5 Form Control Reference

This section describes the controls you can add to a form.

Table 5-5 Control Types and Supported Data Types

Control Type	Data Types							Resource Request
	Boolean	Date	Decimal	DN	Integer	String	Time	
CheckBoxPickList	x		x	x	x	x		
DatePicker		x						
DateTimePicker							x	
DNContainer				x				
DNDisplay				x				
DNLookup				x				
DNMaker				x				
DNQuery				x				
Global List						x		
Html						x		
Localized Label						x		
MVCheckbox			x	x	x	x		
MVEditor			x	x	x	x		
Password						x		
PickList			x	x	x	x		
Static List	x		x		x	x		
Text			x	x	x	x		
Text Area						x		
Title						x		
TrueFalseCheckBox	x							
TrueFalseRadioButtons	x							
TrueFalseSelectBox	x							

- ◆ [Section 5.5.1, “Data Type for Roles Based Request Forms,” on page 127](#)
- ◆ [Section 5.5.2, “Data Type for Resource Based Request Forms,” on page 127](#)
- ◆ [Section 5.5.3, “Controls for User-Entered Comments,” on page 127](#)
- ◆ [Section 5.5.4, “General Form Control Properties,” on page 128](#)
- ◆ [Section 5.5.5, “CheckBoxPickList,” on page 128](#)
- ◆ [Section 5.5.6, “DatePicker,” on page 130](#)
- ◆ [Section 5.5.7, “DateTimePicker,” on page 131](#)
- ◆ [Section 5.5.8, “DNContainer,” on page 132](#)
- ◆ [Section 5.5.9, “DNDisplay,” on page 134](#)

- ♦ Section 5.5.10, “DNLookup,” on page 136
- ♦ Section 5.5.11, “DNMaker,” on page 141
- ♦ Section 5.5.12, “DNQuery,” on page 143
- ♦ Section 5.5.13, “Global List,” on page 144
- ♦ Section 5.5.14, “Localized Label,” on page 145
- ♦ Section 5.5.15, “Html,” on page 147
- ♦ Section 5.5.16, “MVCheckbox,” on page 147
- ♦ Section 5.5.17, “MVEditor,” on page 149
- ♦ Section 5.5.18, “Password,” on page 154
- ♦ Section 5.5.19, “PickList,” on page 154
- ♦ Section 5.5.20, “Static List,” on page 157
- ♦ Section 5.5.21, “Text,” on page 158
- ♦ Section 5.5.22, “Text Area,” on page 159
- ♦ Section 5.5.23, “Title,” on page 160
- ♦ Section 5.5.24, “TrueFalseCheckBox,” on page 161
- ♦ Section 5.5.25, “TrueFalseRadioButtons,” on page 162
- ♦ Section 5.5.26, “TrueFalseSelectBox,” on page 162

5.5.1 Data Type for Roles Based Request Forms

Designer supports a specialized form control called `nrfRequestDN` of data type `Role Request`. The control type is `Text`. It is defined by default when you create a copy of the standard roles based provisioning request definitions. It represents the `Role Request` object.

5.5.2 Data Type for Resource Based Request Forms

Designer supports a specialized form control called `nrfResourceRequestDN` of data type `Resource Request`. The control type is `Text`. It is defined by default when you create a copy of the standard resource based provisioning request definitions. It represents the `Resource Request` object. You can add this control only once. `nrfResourceRequestDN` is the field name and it cannot be changed in the GUI.

5.5.3 Controls for User-Entered Comments

Designer supports a special internal control you can add to a form to allow users to add comments to a workflow or to view previously entered comments. Comments are required on forms that use *CommentAction* or *UpdateAction*. The comments are not part of the workflow data so you cannot access them via the flowdata object. The comments are special data items stored in the `afcomment` table of the workflow database. The comments are persisted as long as the row for the `requestid` in the `afprocess` table exists.

To create a form that supports user comments:

- 1 Add a control to your form. Select `Comment` as the data type. The Form Field name is automatically defined as `apwaComment` and the Control Type is `TextArea`. A single form can contain only one comment field.

2 Add a *CommentAction* or *UpdateAction* to the form.

For more information, see [Section 5.4, “Action Reference,”](#) on page 123.

5.5.4 General Form Control Properties

The properties in the following table are available for each control.

Table 5-6 *General Properties*

Property Name	Description
<i>Display label</i>	Specifies the label to display to identify the control. It is localizable.
<i>Editable</i>	Specifies if the control is editable (True). Otherwise, it displays as read-only.
<i>Events</i>	Specifies an event for the control. Possible values include the following: <ul style="list-style-type: none">◆ OnChange: Fires when one of the following occurs:<ul style="list-style-type: none">◆ Immediately after onload.◆ Another script changes the value of the control.◆ The user commits a change to the data value associated with the control. This occurs when the user has tabbed out of the control or otherwise caused it to lose focus. For example, this can happen when the user tabs away from the control (for text entry based controls like Text, TextArea, DatePicker), or when the user selects a different entry choice for choice-based controls like PickList, MVCheckbox, and StaticList).◆ onLoad: The onload event for a control fires just once, when the control is loaded into the page for the first time. It can be used to set initial values or preselect entries; however, there is no guarantee that controls load in a particular order.
<i>Multivalued</i>	This is a read-only property. It specifies if the control supports multivalued attributes (True).
<i>Required</i>	Specifies whether the control requires user input (True).
<i>Tooltip</i>	Specifies the text for the control's tooltip. It is localizable.
<i>Visible</i>	Specifies whether the control is displayed in the user interface (True).

Sort Order

List-based controls sort content alphabetically. For DN-based lists, the sort order is alphabetical based on the Display expression property result. For all other types, the sort order is based on the display label.

5.5.5 CheckBoxPickList

Use the CheckBoxPickList control to allow users to view and choose one or more values from a dynamically generated list of choices displayed as check boxes.

When the associated data type is a DN retrieved from the Identity Vault, you can display the check box label as the fully qualified DN or use the Display expression property to specify the attributes to display instead.

Figure 5-10 Sample CheckBoxPickList Control

CheckBoxPickList: Asia Europe North America South America

Table 5-7 CheckBoxPickList Properties

Property Name	Description
<i>Entity Key for DN expression lookup</i>	<p>When you populate this control with a DN retrieved from the Identity Vault and you want that value to display in a user-friendly fashion, you should choose an entity from the drop-down list and specify a set of attributes in the Display expression property.</p> <p>Leave this value blank if you want to display the full DN or CN value retrieved from the Identity Vault.</p> <p>The entity you choose must have the directory abstraction layer View property set to True and be the entity whose DN you are retrieving from the Identity Vault.</p>
<i>Display expression</i>	<p>Required when you specify an <i>Entity Key for DN expression Lookup</i>. Choose the attributes to display as the check box labels. For example, to display the user entity's first and last name attributes, construct an expression like this: FirstName LastName.</p> <p>The attribute's directory abstraction layer properties for View, Read, Search, and Required must be set to True.</p>
<i>Allow multiple selections</i>	<p>When this option is set to True, users can select more than one entry.</p>
<i>Field cell style</i>	<p>Apply an HTML style attribute to the field body.</p> <p>Example: padding-top:5px;background-color:red</p>
<i>Field CSS class name(s)</i>	<p>Apply one or more CSS class styles to the field body. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i>, then clicking the <i>Preview</i> button for the portal theme you are using.</p> <p>If you leave the field blank, it defaults to the nv-fontExtraSmall class.</p> <p>Example: nv-fontMedium nv-backgroundColor3</p> <p>Separate class names with spaces.</p>
<i>Label cell style</i>	<p>Apply an HTML style attribute to the field label.</p> <p>Example: color:red</p>

Property Name	Description
<i>Label CSS class name(s)</i>	<p>Apply one or more CSS class styles to the field label. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i>, then clicking the <i>Preview</i> button for the portal theme you are using.</p> <p>If you leave the field blank, it defaults to the <code>nv-formFieldLabel</code> class.</p> <p>Example: <code>nv-color5</code></p> <p>Separate class names with spaces.</p>
<i>Show 2 lists</i>	<p>When this option is set to True, two lists are displayed, one for the unselected values and another for the selected values.</p> <p>The Allow multiple selections property must be set to True. If set to False, <i>Show 2 lists</i> is ignored.</p>
<i>Sort entries</i>	<p>When this option is set to True, sorts results in ascending order. For details, see "Sort Order" on page 128.</p>

5.5.6 DatePicker

Use this control for display and entry of a date and time. This allows users to choose a date from a pop-up calendar or type a date in a text field. At runtime, the form automatically validates the date by using the format for the user's locale and time zone. If the user enters an incorrect format, the form displays an error message. The DatePicker control's tooltip displays the valid date format. The default DatePicker control looks like this:

Figure 5-11 Sample DatePicker Control

DatePickerControl: 

When the Show date picker property is True, the form displays the date field along with a button. When the user clicks the button, the form launches a calendar for the user to select the date. The calendar pop-up looks like this:

Figure 5-12 Sample Calendar Control

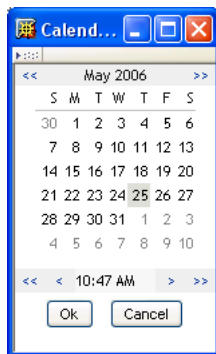



Table 5-8 DatePicker Control Properties

Property name	Description
<i>Datetime indicator</i>	When this option is set to False, the Calendar pop-up does not display the time.
<i>Day headers</i>	A comma-separated, single-quoted list of values displayed by the Calendar pop-up to indicate the day of the week. This value is localizable.
<i>Field cell style</i>	Apply an HTML style attribute to the field body. Example: padding-top:5px;background-color:red
<i>Field CSS class name(s)</i>	Apply one or more CSS class styles to the field body. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i> , then clicking the <i>Preview</i> button for the portal theme you are using. If you leave the field blank, it defaults to the nv-fontExtraSmall class. Example: nv-fontMedium nv-backgroundColor3 Separate class names with spaces.
<i>Field Width in pixels</i>	Use this field to configure the field's visible width on the form. The default is 200 pixels.
<i>Label cell style</i>	Apply an HTML style attribute to the field label. Example: color:red
<i>Label CSS class name(s)</i>	Apply one or more CSS class styles to the field label. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i> , then clicking the <i>Preview</i> button for the portal theme you are using. If you leave the field blank, it defaults to the nv-formFieldLabel class. Example: nv-color5 Separate class names with spaces.
<i>Month names</i>	A comma-separated, single-quoted list of values displayed by the Calendar pop-up to indicate the month name. This value is localizable.
<i>Show date picker</i>	When this option is set to True, displays the calendar pop-up. If it is set to False, the calendar pop-up does not display. Users must type the date in the text field by using the proper format for their locale.

5.5.7 DateTimePicker

Use this control for display and entry of a date and time for a Time data type. This allows users to choose a date and time from a pop-up calendar or type a value in a text field. At runtime, the form automatically validates the date and time by using the format for the user's locale and time zone. If the user enters an incorrect format, the form displays an error message. The DateTimePicker tooltip displays the valid date format. The default control looks like this:

Figure 5-13 Sample DateTimePicker Control

DateTimePicker: 

When the *Show date picker* property is set to True, the form displays a text field followed by a calendar button. When the user clicks the calendar button, the form launches a calendar control for the user to select the date and time values. The calendar pop-up looks like this:

Figure 5-14 DateTimePicker Calendar Control

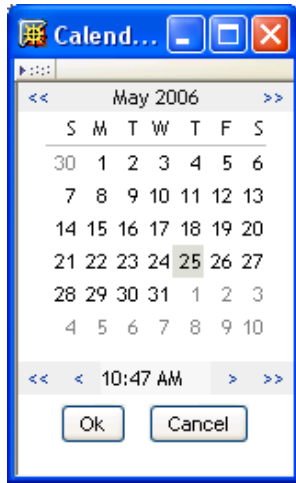


Table 5-9 DateTimePicker Control Properties

Property name	Description
<i>Day headers</i>	A comma-separated, single-quoted list of values displayed by the Calendar pop-up to indicate the day of the week. This value is localizable.
<i>Field width in pixels</i>	Use this field to configure the field's visible width on the form. The default is 200 pixels.
<i>isDateTime</i>	When this option is set to False, the Calendar pop-up does not display the time.
<i>Month names</i>	A comma-separated, single-quoted list of values displayed by the Calendar pop-up to indicate the month name. This value is localizable.
<i>Show date picker</i>	When this option is set to True, it displays the calendar pop-up. If it is set to False, the calendar pop-up does not display. Users must type the proper format for the locale when they type the date in the text field.

5.5.8 DNContainer

Use this control to allow users to select a container object from within the root container that you specify. You can use this control to limit the user to a subtree of a container. This is a specialized version of the DNLookup control.

Figure 5-15 DNContainer Control With Root Container Specified



Table 5-10 DNContainer Control Properties

Property name	Description
<i>Entity key used for object lookup</i>	Choose an entity from the drop-down list. The entity that you choose limits the users ability to look up objects within the specified entity's container. If you specify an entity key and a root container, the entity key takes precedence.
<i>Field cell style</i>	Apply an HTML style attribute to the field body. Example: padding-top:5px;background-color:red
<i>Field CSS class name(s)</i>	Apply one or more CSS class styles to the field body. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i> , then clicking the <i>Preview</i> button for the portal theme you are using. If you leave the field blank, it defaults to the nv-fontExtraSmall class. Example: nv-fontMedium nv-backgroundColor3 Separate class names with spaces.
<i>Field width in pixels</i>	Use this field to configure the field's visible width on the form. The default is 200 pixels.
<i>Label cell style</i>	Apply an HTML style attribute to the field label. Example: color:red
<i>Label CSS class name(s)</i>	Apply one or more CSS class styles to the field label. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i> , then clicking the <i>Preview</i> button for the portal theme you are using. If you leave the field blank, it defaults to the nv-formFieldLabel class. Example: nv-color5 Separate class names with spaces.
<i>Root container</i>	Specify a root container for lookups when users click the <i>Object Selector</i> button.
<i>Show clear button</i>	If set to True, the form displays the  <i>Reset field</i> button
<i>Show object history button</i>	If set to True, the form displays the  <i>Show history</i> button.
<i>Show object selector button</i>	If set to True, the form displays the  <i>Object Selector</i> button.

Displaying the Container Description Instead of the Container O/OU Name

Some additional steps are required to take advantage of an Identity Manager 4.0 DNContainer form field enhancement. This enhancement allows you to display the container description instead of the container O/OU name.

To enable the DNContainer enhancement, you need to manually update the Designer install to add properties to the DNContainer control. Then, you need to create a DAL entity corresponding to the container for which you want to display an attribute. Finally, you need to use the form editor to choose the entity and attribute.

- 1 Locate the following file in your Designer install:

```
/opt/novell/idm/Designer/plugins/com.novell.core.scriptengineshell_4.0.2.0.*/  
lib/UIRegistry.jar
```

- 2 Back it up first, then use a suitable jar/zip tool to modify the file within the jar:

```
com\novell\srvrprv\impl\uictrl\UIControlRegistry.xml
```

- 3 Locate the `<ctrl key="DNContainer">` section and add the following properties at the end:

```
<prop name="display-entitydef" type="string" since="1.9">  
  <display-label rb-key="LAB_DIS_ENTITYDEF"/>  
</prop>  
<prop name="display-exp" type="expression" since="1.9">  
  <display-label rb-key="LAB_DIS_EXPRESSION"/>  
</prop>
```

- 4 Put this file back into the JAR in its original location and start Designer.
- 5 In Designer, create a new DAL entry with an unused name, such as `myDescriptionLookup`.
- 6 For the base class of this DAL entry, choose *Organization*, and pick the attribute you want to show (for example *Description*).
- 7 When the DAL editor is open, change the LDAP name of the class to *Top*. (This allows you to view the Description for Organizations, Organizational Units, and so forth.)
- 8 To use the new DAL entry, open a PRD and go to a form. Add or pick a *dn/DNContainer* field.
- 9 Fill in the two new fields (*Entity key for DN expression lookup*, *Display expression*) with the values specified above (`myDescriptionLookup`, `Description`).
- 10 Deploy the new DAL entry and the PRD.
- 11 On the User Application, clear the cache or restart the server.
- 12 Test the new PRD to ensure that the descriptions are shown instead of the cn in the DNContainer control.

Make sure the containers you are going to show have a Description value; otherwise, cn is used. Containers, by default, leave this value blank.

5.5.9 DNDisplay

Use this control to display a read-only DN. You populate the control from flowdata. The control can display the full DN or a set of attributes associated with the DN depending on the properties you set. The DNDisplay control cannot be modified by the workflow engine. For this reason, it is not available for post activity mapping.

Figure 5-16 Sample DNDisplay

This is a DNDisplay control

Display DN:

cn=kkilpatrick,ou=users,ou=idmsample-doc,o=novell

Figure 5-17 Sample DNDisplay with Display Expression Specified




Table 5-11 DNDisplay Control Properties

Property name	Description
<i>Display expression</i>	<p>Leave this value blank if you want to display the full DN or CN value.</p> <p>If you want to mask the DN by displaying attributes instead, launch the expression builder and select the desired attributes from the list. (You must first specify an <i>Entity key for DN expression lookup</i>.)</p> <p>For example, to show the user entity's first and last name attributes, construct an expression like this: <code>FirstName LastName</code>.</p> <p>Make sure the attribute's View, Read, Search, and Required properties are set to True in the directory abstraction layer. See Section 3.7.2, "Attribute Properties," on page 69.</p>
<i>Entity key for DN expression lookup</i>	<p>Leave this value blank if you want to display the full DN or CN value retrieved from the Identity Vault.</p> <p>If you want to mask the DN or CN by displaying attributes instead, choose the entity from the drop-down list and specify a set of attributes in the <i>Display expression</i> property.</p> <p>The entity you choose must:</p> <ul style="list-style-type: none"> ◆ Have the directory abstraction layer View property set to True. ◆ Be the entity of the DN you are working with. <p>For more information, see Section 5.6, "Working with Distinguished Names," on page 163.</p>
<i>Field cell style</i>	<p>Apply an HTML style attribute to the field body.</p> <p>Example: <code>padding-top:5px;background-color:red</code></p>
<i>Field CSS class name(s)</i>	<p>Apply one or more CSS class styles to the field body. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i>, then clicking the <i>Preview</i> button for the portal theme you are using.</p> <p>If you leave the field blank, it defaults to the <code>nv-fontExtraSmall</code> class.</p> <p>Example: <code>nv-fontMedium nv-backgroundColor3</code></p> <p>Separate class names with spaces.</p>
<i>Label cell style</i>	<p>Apply an HTML style attribute to the field label.</p> <p>Example: <code>color:red</code></p>

Property name	Description
<i>Label CSS class name(s)</i>	<p>Apply one or more CSS class styles to the field label. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i>, then clicking the <i>Preview</i> button for the portal theme you are using.</p> <p>If you leave the field blank, it defaults to the <code>nv-formFieldLabel</code> class.</p> <p>Example: <code>nv-color5</code></p> <p>Separate class names with spaces.</p>

5.5.10 DNLookup

Use this control to allow users to search and retrieve DNs from the Identity Vault. You can initialize the control with a DN from the flowdata. You set properties to control the entities and containers that the user can search and the format of the DN.

Figure 5-18 *Sample DNLookup Control*



The buttons associated with the DNLookup control are described in [Table 5-12](#).

Table 5-12 DNLookup Control Buttons






Button	Description
	<p>Launches an object lookup dialog box. You define whether the dialog box displays containers or objects via the <i>Object Selector type</i> property. The following is an example of an object lookup:</p> <div data-bbox="532 386 1032 1033" data-label="Image"></div>
	<p>Show history. Allows users to view the history of objects that they have searched. They can select from this list or clear its contents. The availability of this button is controlled by the Show object history button property.</p>
	<p>Reset field. Deletes the field contents. The availability of this button is controlled by the Show clear button property.</p>

Table 5-13 DNLookup Control Properties

Property Name	Description
<i>Display expression</i>	<p>This property only applies when you initialize the control from flowdata. Leave this value blank if you want to display the full DN or CN value.</p> <p>If you want to mask the DN by displaying attributes instead, launch the Expression Builder and select the desired attributes from the list. (You must first specify an <i>Entity key for DN expression lookup</i>.)</p> <p>For example, to show the user entity's first and last name attributes, construct an expression like this: <code>FirstName LastName</code>.</p> <p>Make sure the attribute's View, Read, Search, and Required properties are set to True in the directory abstraction layer. See Section 3.7.2, "Attribute Properties," on page 69.</p>
<i>Entity key for DN expression lookup</i>	<p>This property only applies when you initialize the control from flowdata. Leave this value blank if you want to display the full DN or CN value retrieved from the Identity Vault.</p> <p>If you want to mask the DN or CN by displaying attributes instead, choose the entity from the drop-down list, then specify a set of attributes in the <i>Display expression</i> property.</p> <p>The entity you choose must:</p> <ul style="list-style-type: none">◆ Have the directory abstraction layer View property set to True.◆ Be the entity of the DN you are working with. <p>For more information, Section 5.6, "Working with Distinguished Names," on page 163.</p>
<i>Field cell style</i>	<p>Apply an HTML style attribute to the field body.</p> <p>Example: <code>padding-top:5px;background-color:red</code></p>
<i>Field CSS class name(s)</i>	<p>Apply one or more CSS class styles to the field body. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i>, then clicking the <i>Preview</i> button for the portal theme you are using.</p> <p>If you leave the field blank, it defaults to the <code>nv-fontExtraSmall</code> class.</p> <p>Example: <code>nv-fontMedium nv-backgroundColor3</code></p> <p>Separate class names with spaces.</p>
<i>Label cell style</i>	<p>Apply an HTML style attribute to the field label.</p> <p>Example: <code>color:red</code></p>

Property Name	Description
<i>Label CSS class name(s)</i>	<p>Apply one or more CSS class styles to the field label. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i>, then clicking the <i>Preview</i> button for the portal theme you are using.</p> <p>If you leave the field blank, it defaults to the <i>nv-formFieldLabel</i> class.</p> <p>Example: <i>nv-color5</i></p> <p>Separate class names with spaces.</p>

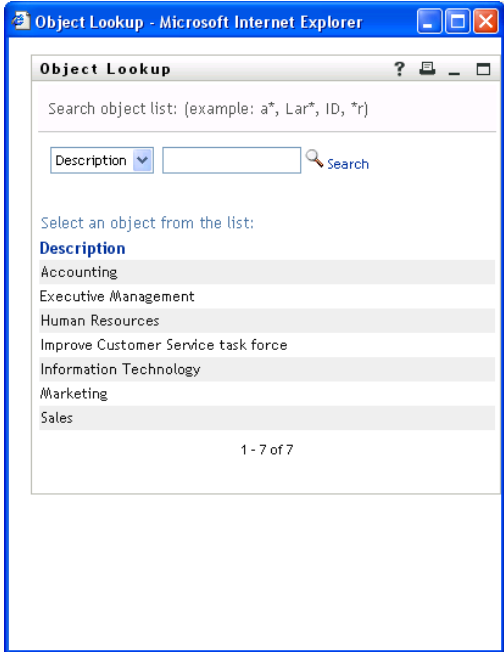Property Name	Description
<i>Object Selector type</i>	Determines whether the object selector dialog box performs an Object Lookup or a Container Lookup. The following is an example of an Object Lookup:
	
	<i>paramlist</i> . Causes the object selector dialog box to perform an object lookup. You specify the lookup criteria via the <i>Entity key for DN Expression lookup</i> property.
	<i>container</i> . Causes the object selector dialog box to display one or more containers for selection. The containers for searching are determined by the <i>Search container</i> property, which is specified in the directory abstraction layer for the entity named in the required <i>Entity Key for DN Expression lookup</i> property. For example, if the <i>Entity key for DN Expression lookup</i> property is Group, the search container is set to %group-root% by default. If no search container is used, the search root specified during the User Application installation is used.
<i>Field width in pixels</i>	Use this field to configure the field's visible width on the form. The default is 200 pixels.
<i>Show clear button</i>	If this option is set to True, the form displays the <i>Reset field</i> button.
<i>Show object history button</i>	If this option is set to True, the form displays the <i>Show history</i> button.

Property Name	Description
<i>Show object selector button</i>	If this option is set to True, the form displays the <i>object selector</i> button.

5.5.11 DNMaker

Use this control to allow users to construct a DN value by specifying a naming value and choosing a container.

Figure 5-19 Sample DNMaker Control



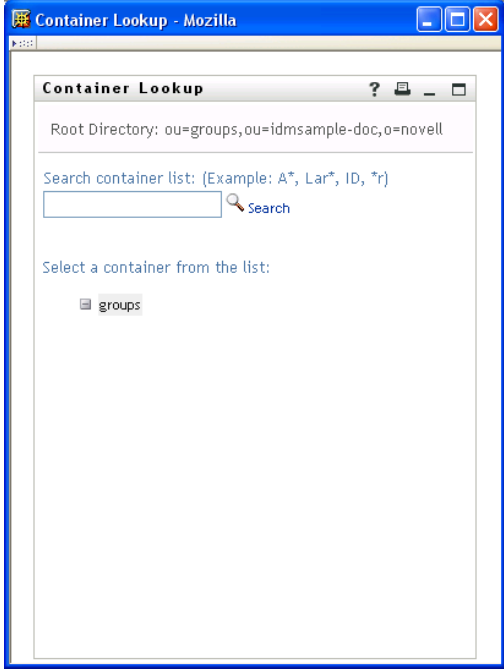

DNMaker: cn=   

Table 5-14 DNMaker Control Buttons

Button	Description
	<p>Launches an object selector for container searches like the one shown below.</p> 
	<p><i>Show history.</i> Allows users to view the history of objects that they have searched. They can select from this list or clear its contents. The availability of this button is controlled by the Show object history button property.</p> <p>If the root container is specified for lookups, the Show history button is not shown even if the property is set to True. This has been done for security reasons.</p>


Button	Description
	<i>Reset field.</i> Deletes the field contents. The availability of this button is controlled by the Show clear button property.

Table 5-15 DNMaker Control Properties

Property	Description
<i>Entity key used for object lookup</i>	<p>A required field. Choose an entity from the drop-down list. This determines the search that is launched when the user clicks the object selector button.</p> <p>If you specify an entity key and a root container, the entity key takes precedence</p>
<i>Naming attribute</i>	The naming attribute used to construct the final DN. This value displays next to the control's display label as an extra hint to the user.
<i>Field cell style</i>	<p>Apply an HTML style attribute to the field body.</p> <p>Example: padding-top:5px;background-color:red</p>
<i>Field CSS class name(s)</i>	<p>Apply one or more CSS class styles to the field body. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i>, then clicking the <i>Preview</i> button for the portal theme you are using.</p> <p>If you leave the field blank, it defaults to the nv-fontExtraSmall class.</p> <p>Example: nv-fontMedium nv-backgroundColor3</p> <p>Separate class names with spaces.</p>
<i>Label cell style</i>	<p>Apply an HTML style attribute to the field label.</p> <p>Example: color:red</p>
<i>Label CSS class name(s)</i>	<p>Apply one or more CSS class styles to the field label. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i>, then clicking the <i>Preview</i> button for the portal theme you are using.</p> <p>If you leave the field blank, it defaults to the nv-formFieldLabel class.</p> <p>Example: nv-color5</p> <p>Separate class names with spaces.</p>
<i>Root container</i>	Specify a root container for lookups when users click the object selector button. If you do not specify a Root container, the User Application uses the container for the entity in the directory abstraction layer property called Search Container. If a search container is not specified for the specified entity, then the Root Container DN specified during the User Application installation is used. If you specify an entity key and a root container, the entity key takes precedence.
<i>Show clear button</i>	If this option is set to True, the form displays the <i>Reset field</i> button.
<i>Show object history button</i>	If this option is set to True, the form displays the <i>Show history</i> button.



Property	Description
<i>Show object selector button</i>	If this option is set to True, the form displays the <i>object selector</i> button.

5.5.12 DNQuery

DNQuery is a specialized version of the DNLookup control. Like DNLookup, DNQuery allows users to search and retrieve DNs from the Identity Vault; however, with the DNQuery, the object selector content can be driven by the result of a directory abstraction layer Queries object rather than from properties.

Table 5-16 DNQuery Control Properties

Property Name	Description
<i>DAL global query key</i>	Specifies the key of the DAL Queries object you want executed. You can select it from the Event Action Expression Builder. For more information about using DAL queries, see Section 5.7, "Using DAL Queries in Forms," on page 165 . For more information about defining DAL queries, see Section 3.4, "Working with Queries," on page 57 .
<i>DAL global query parameter(s)</i>	Specifies the value for the query parameters. For example, this passes the String Sales to the Queries parameter called groupname: <pre>(function () {return {"groupname": "Sales"}}) ();</pre>
<i>Display expression</i>	When you populate the control with initial data from a Data Item Mapping value, use this property to specify the attributes to display.
<i>Entity key for DN expression lookup</i>	This property only applies when you initialize the control from flowdata. Leave this value blank if you want to display the full DN or CN value retrieved from the Identity Vault. If you want to mask the DN or CN by displaying attributes instead, choose the entity from the drop-down list, then specify a set of attributes in the <i>Display expression</i> property. The entity you choose must: <ul style="list-style-type: none"> ◆ Have the directory abstraction layer View property set to True. ◆ Be the entity of the DN you are working with. For more information, see Section 5.6, "Working with Distinguished Names," on page 163 .
<i>Field cell style</i>	Apply an HTML style attribute to the field body. Example: padding-top:5px;background-color:red

Property Name	Description
<i>Field CSS class name(s)</i>	<p>Apply one or more CSS class styles to the field body. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i>, then clicking the <i>Preview</i> button for the portal theme you are using.</p> <p>If you leave the field blank, it defaults to the <code>nv-fontExtraSmall</code> class.</p> <p>Example: <code>nv-fontMedium nv-backgroundColor3</code></p> <p>Separate class names with spaces.</p>
<i>Field width in pixels</i>	<p>Use this field to configure the field's visible width on the form. The default is 200 pixels.</p>
<i>Label cell style</i>	<p>Apply an HTML style attribute to the field label.</p> <p>Example: <code>color:red</code></p>
<i>Label CSS class name(s)</i>	<p>Apply one or more CSS class styles to the field label. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i>, then clicking the <i>Preview</i> button for the portal theme you are using.</p> <p>If you leave the field blank, it defaults to the <code>nv-formFieldLabel</code> class.</p> <p>Example: <code>nv-color5</code></p> <p>Separate class names with spaces.</p>
<i>Show clear button</i>	<p>If set to True, the form displays the  <i>Reset field</i> button</p>
<i>Show object selector button</i>	<p>If set to True, the form displays the  <i>Object Selector</i> button.</p>

5.5.13 Global List

Use this control to allow users to select a single entry from a drop-down list. The contents of the list are defined in a directory abstraction layer global list element.

Figure 5-20 Sample Global List Control



Table 5-17 Global List Properties

Property Name	Description
<i>DAL global list key</i>	Specifies the unique identifier of the global list. This must correspond to the key specified in the directory abstraction layer.
<i>Field cell style</i>	Apply an HTML style attribute to the field body. Example: padding-top:5px;background-color:red
<i>Field CSS class name(s)</i>	Apply one or more CSS class styles to the field body. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i> , then clicking the <i>Preview</i> button for the portal theme you are using. If you leave the field blank, it defaults to the nv-fontExtraSmall class. Example: nv-fontMedium nv-backgroundColor3 Separate class names with spaces.
<i>Label cell style</i>	Apply an HTML style attribute to the field label. Example: color:red
<i>Label CSS class name(s)</i>	Apply one or more CSS class styles to the field label. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i> , then clicking the <i>Preview</i> button for the portal theme you are using. If you leave the field blank, it defaults to the nv-formFieldLabel class. Example: nv-color5 Separate class names with spaces.

For more information about global lists, see [Section 3.3, “Working with Lists,”](#) on page 54.

5.5.14 Localized Label

Use this control if you want to allow the user to provide translated text for the field. This control displays the standard icon that indicates the text can be localized.

Figure 5-21 LocalizedLabel Control



If the user clicks the icon, they are able to type the text for each language supported by the User Application driver. The list of languages displayed for this control is determined by the contents of the locale resource group called base-resgrp.

Figure 5-22 LocalizedLabel Control

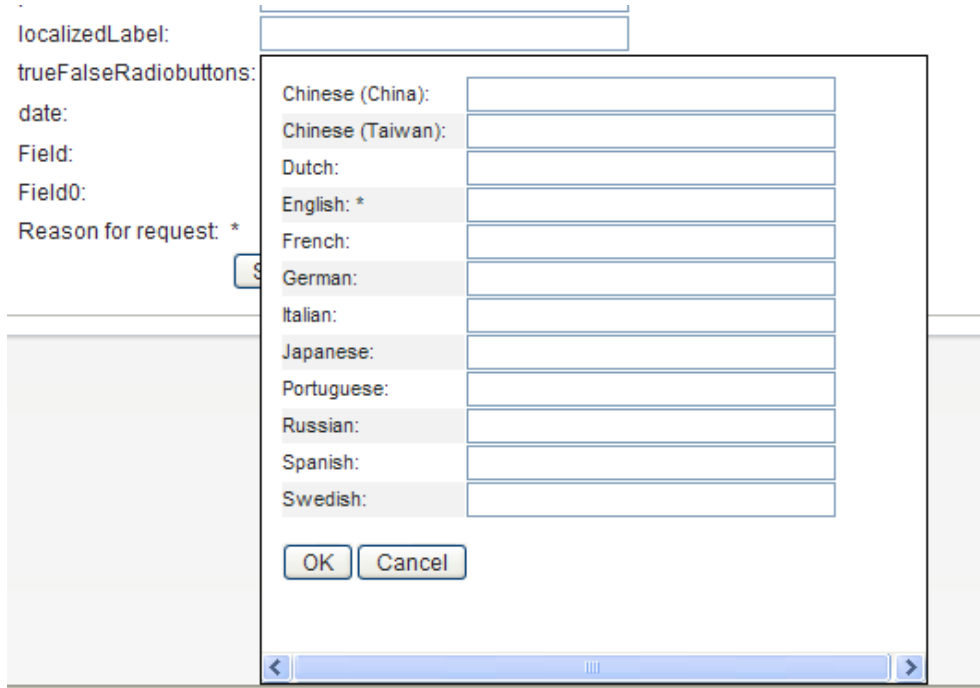


Table 5-18 LocalizedLabel Control Properties

Property Name	Description
<i>Field CSS class name(s)</i>	<p>Apply one or more CSS class styles to the field body. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i>, then clicking the <i>Preview</i> button for the portal theme you are using.</p> <p>If you leave the field blank, it defaults to the <code>nv-fontExtraSmall</code> class.</p> <p>Example: <code>nv-fontMedium nv-backgroundColor3</code></p> <p>Separate class names with spaces.</p>
<i>Label CSS class name(s)</i>	<p>Apply one or more CSS class styles to the field label. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i>, then clicking the <i>Preview</i> button for the portal theme you are using.</p> <p>If you leave the field blank, it defaults to the <code>nv-formFieldLabel</code> class.</p> <p>Example: <code>nv-color5</code></p> <p>Separate class names with spaces.</p>

5.5.15 Html

Use this control to add HTML fragments to the Form Detail. You can do this by specifying the HTML fragments in the HTML content property. In addition, you can conditionally add the HTML fragment via an event on the form control. In either case, specify the HTML through the use of an anonymous function, such as: (function() { return "<yourTag yourAttr='your attr value' />"; }) ();

For example:

```
(function(){ return "<table bgcolor='#C0C0C0'><th colspan='3' align='center'>Table Header Goes Here</th><tr><td>Value 1.1</td><td>Value 1.2</td></tr><tr><td>Value 2.1</td><td>Value 2.2</td></tr></table>"; })()
```

Table 5-19 HTML Control Properties

Property Name	Description
<i>Field cell style</i>	Apply an HTML style attribute to the field body. Example: padding-top:5px;background-color:red
<i>Field CSS class name(s)</i>	Apply one or more CSS class styles to the field body. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i> , then clicking the <i>Preview</i> button for the portal theme you are using. If you leave the field blank, it defaults to the nv-fontExtraSmall class. Example: nv-fontMedium nv-backgroundColor3 Separate class names with spaces.
<i>Label cell style</i>	Apply an HTML style attribute to the field label. Example: color:red
<i>Label CSS class name(s)</i>	Apply one or more CSS class styles to the field label. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i> , then clicking the <i>Preview</i> button for the portal theme you are using. If you leave the field blank, it defaults to the nv-formFieldLabel class. Example: nv-color5 Separate class names with spaces.

5.5.16 MVCheckbox


Use this control to display a set of labeled check boxes. You specify the label and its associated values through the List item property. A sample MVCheckbox control is shown below.

Figure 5-23 Sample MVCheckbox Control

MVCheckboxControl: Blue Green Red Yellow

Table 5-20 MVCheckbox Control Properties

Property Name	Description
<i>Field cell style</i>	Apply an HTML style attribute to the field body. Example: padding-top:5px;background-color:red
<i>Field CSS class name(s)</i>	Apply one or more CSS class styles to the field body. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i> , then clicking the <i>Preview</i> button for the portal theme you are using. If you leave the field blank, it defaults to the nv-fontExtraSmall class. Example: nv-fontMedium nv-backgroundColor3 Separate class names with spaces.
<i>Label cell style</i>	Apply an HTML style attribute to the field label. Example: color:red
<i>Label CSS class name(s)</i>	Apply one or more CSS class styles to the field label. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i> , then clicking the <i>Preview</i> button for the portal theme you are using. If you leave the field blank, it defaults to the nv-formFieldLabel class. Example: nv-color5 Separate class names with spaces.
<i>List item</i>	Allows you to define a set of static values that comprise the check box labels and values. Click the <i>List property</i> button to launch the list value dialog box shown here:

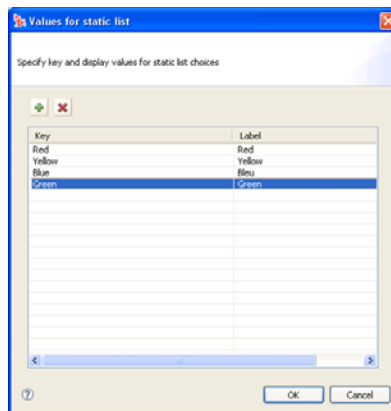

TIP: To retrieve user-entered values for this control, use `flowdata.getObject()` and not `flowdata.get()`. If you use `flowdata.get()`, you get only the first value.

For more information on preselecting values, see the [Section 9.2.3, “Form Control Examples,”](#) on page 324.


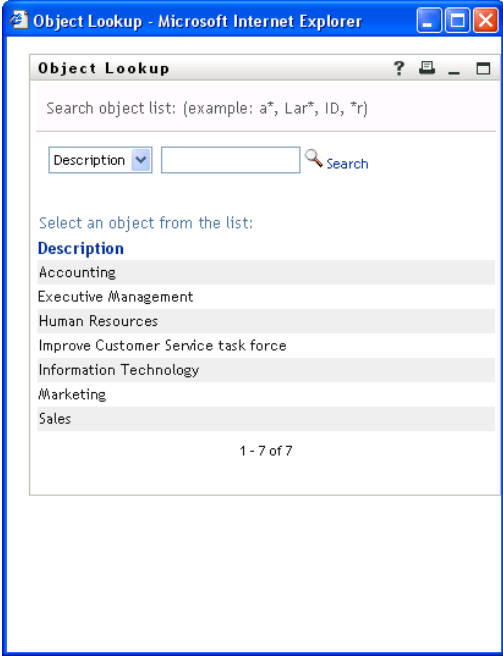
5.5.17 MVEditor

Use this control to allow users to display, edit, or add multiple values in a drop-down list box. You can load the data dynamically from the Identity Vault, or allow users to enter the values.



The control’s appearance varies depending on the data type of the control and the properties that you specify. For example, if the data type is a DN, you can set properties that display specific attributes related to the DN. You can also enable an object selector button that allows users to search and select values by setting the Entity key for DN expression lookup property.

There are also properties that let you specify a DAL Global Query to execute or specify a root DN to drive the object picker.

Table 5-21 MVEditor with Object Selector Properties Set Control Buttons

Button	Description
	Launches a search dialog box called an object selector. The object selector dialog box looks like this: 

The user can select a value from the list to populate the control. The attribute displayed in the drop-down list (*Description* in the above example) is specified in the directory abstraction layer. You specify it in the attribute’s `UIControl` property. See [“Attribute UI Control Properties”](#) on page 71. The availability of this button is controlled by the `Show object selector` property.




Button	Description
	<i>Show history.</i> Allows users to view the history of objects that they have searched. They can select from this list or clear its contents. The availability of this button is controlled by the Show object history button property.
	<i>Reset field.</i> Deletes the field contents. The availability of this button is controlled by the Show clear button property.

If you do not set the object lookup properties, the MVEditor displays a simple edit control.

Figure 5-24 Sample MVEditor without Object Lookup Properties Set



Table 5-22 MVEditor Control Buttons

Button	Description
	Adds an item to the end of the list.
	Deletes the selected list item.
	Edits the selected list item.

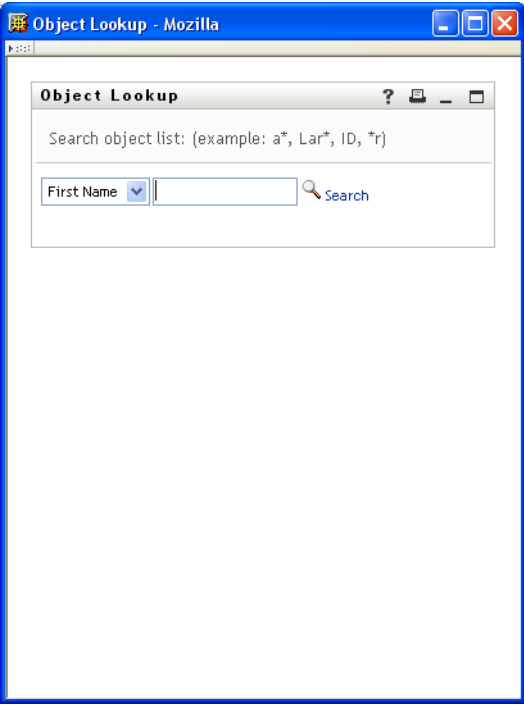
TIP: When the MVEditor control's Editable property is set to False, this control is read-only and the form does not display any MVEditor control buttons.

Table 5-23 MVEditor Control Properties

Property Name	Description
<i>Add data entry text field</i>	When this option is set to True and there is a single row of data (and the data is not a DN), the control displays a data entry text field. The text field is displayed when the field is empty or contains only one value. Otherwise, the drop-down list is displayed. If more than one row of data exists, then the drop-down list always displays.
<i>DAL Global Query</i>	Specify this value if you want the control populated by the results of the Global Query that you specify. You specify the key name. You can select it from the Event Action Expression Builder. For more information about using queries in forms, see Section 5.7, "Using DAL Queries in Forms," on page 165 . For information about defining queries, see Section 3.4, "Working with Queries," on page 57 .

Property Name	Description
<i>DAL Global Query Parameter(s)</i>	<p>Specifies the value for the query parameters. For example, this passes the String Sales to the queries parameter called groupname.</p> <pre>(function () {return {"groupname": "Sales"}}) ();</pre>
<i>Display expression</i>	<p>Leave this value blank if you want to display the full DN or CN value.</p> <p>If you want to mask the DN or CN by displaying attributes instead, launch the Expression Builder and select the desired attributes from the list. (You must first specify an <i>Entity key for DN expression lookup</i>.)</p> <p>For example, to show the user entity's first and last name attributes, construct an expression like this: <code>FirstName LastName</code>.</p> <p>Make sure the attribute's View, Read, Search, and Required properties are set to True in the directory abstraction layer. See Section 3.7.2, "Attribute Properties," on page 69.</p>
<i>Enforce uniqueness</i>	<p>Forces user-entered list items to be unique.</p>
<i>Entity key for DN expression lookup</i>	<p>Leave this value blank if you want to display the full DN or CN value retrieved from the Identity Vault.</p> <p>If you want to mask the DN or CN by displaying attributes instead, choose the entity from the drop-down list and specify a set of attributes in the Display expression property.</p> <p>The entity you choose must</p> <ul style="list-style-type: none"> ◆ Have the directory abstraction layer View property set to True. ◆ Be the entity whose DN you are retrieving from the Identity Vault. <p>See Section 5.6, "Working with Distinguished Names," on page 163 for more information.</p>
<i>Field cell style</i>	<p>Apply an HTML style attribute to the field body.</p> <p>Example: <code>padding-top:5px;background-color:red</code></p>
<i>Field CSS class name(s)</i>	<p>Apply one or more CSS class styles to the field body. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i>, then clicking the <i>Preview</i> button for the portal theme you are using.</p> <p>If you leave the field blank, it defaults to the <code>nv-fontExtraSmall</code> class.</p> <p>Example: <code>nv-fontMedium nv-backgroundColor3</code></p> <p>Separate class names with spaces.</p>

Property Name	Description
<i>Label cell style</i>	Apply an HTML style attribute to the field label. Example: color:red
<i>Label CSS class name(s)</i>	Apply one or more CSS class styles to the field label. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i> , then clicking the <i>Preview</i> button for the portal theme you are using. If you leave the field blank, it defaults to the nv-formFieldLabel class. Example: nv-color5 Separate class names with spaces.
<i>Field width in pixels</i>	Use this field to configure the field's visible width on the form. The default is 200 pixels.
<i>Ignore case</i>	If this option is set to True, ignore case when enforcing uniqueness.
<i>Lower bound (for numbers only)</i>	Minimum integer or decimal value.
<i>Maximum length</i>	Maximum number of characters for string values. The control blocks input when this value is reached.
<i>Minimum length</i>	Minimum number of characters for string values. The control validates that the user enters at least this number of characters.
<i>Number of lines displayed</i>	The number of lines displayed by the control. This is not the number of records retrieved or displayed, but the vertical size of the control. If you set this number to 10 and there are only 5 records to display, the control size is still 10 lines. You can set the number of lines to 1 or to 3 or greater. You cannot set it to 2 because it does not leave enough space for the browser to display scroll bars. If you set it to 2, Designer generates a warning in the Project Checker view and resets it to 3.
<i>Numbers only</i>	If this option is set to True, only numbers can be entered.

Property Name	Description
<i>Object Selector type</i>	Determines whether the object selector dialog box performs an Object Lookup or a Container Lookup. The following is an example of an Object Lookup:
	
	<i>paramlist</i> : Causes the object selector dialog box to perform an object lookup. You specify the lookup criteria via the Entity key for DN expression lookup property.
	<i>container</i> : Causes the object selector to display one or more containers for selection. The containers for searching are determined by the Search container property, which is specified in the directory abstraction layer for the entity named in the Entity key for DN expression lookup property. For example, if the Entity key for DN expression lookup property is Group, the search container is set to %group-root% by default. If no search container is used, the search root specified during the User Application installation is used.
<i>Resolve DN</i>	When set to False, the DN is displayed rather than the Display expression . Consider using this when you expect a large number of DNs to be returned, and you are concerned about performance.
<i>Root Container</i>	Specify a root container for lookups when users click the object selector button. If you specify an entity key and a root container, the entity key takes precedence.
<i>Show object history button</i>	When this option is set to True, displays the <i>Object History</i> button next to the control.
<i>Show object selector button</i>	When this option is set to True, displays the <i>Object Selector</i> button next to the control.

Property Name	Description
<i>Sort entries</i>	When this option is set to True, sorts the results in ascending order. For details, see “Sort Order” on page 128 .
<i>Upper bound (for Numbers only)</i>	The maximum numeric value users can enter.

TIP: To retrieve user-entered values for this control, use `flowdata.getObject()` and not `flowdata.get()`. If you use `flowdata.get()`, you get only the first value.

For more information about preselecting items, see [Chapter 9, “Working with ECMA Expressions,” on page 315](#).

5.5.18 Password

Use the Password control to allow users to mask all of the user’s entries with the * character.

The password control can only be submitted. It does not support any script such as `getValues()` or `setValues()`.

Table 5-24 Password Control Properties

Property Name	Description
<i>Field width in pixels</i>	Use this field to configure the field’s visible width on the form. The default is 200 pixels.
<i>Lower bounds (for numbers only)</i>	The lowest number allowed for decimal or integer values.
<i>Maximum length</i>	Maximum number of characters for string values. The control blocks input when this value is reached.
<i>Minimum length</i>	Minimum number of characters for string values. The control validates that the user enters at least this number of characters.
<i>Number of characters allowed</i>	Specifies the number of characters a user is allowed to enter. This is related to Field width in pixels .
<i>Upper bound (for numbers only)</i>	The highest number allowed for decimal or integer values.
<i>Validation Mask (regular expression)</i>	An expression used for validating the field’s data. Designer provides a default set of validation masks by default. You must enable them through <i>Windows > Preferences > Provisioning > Validation Mask</i> . For more information, see Section 2.3, “Setting Provisioning View Preferences,” on page 23 .

5.5.19 PickList

Use the PickList control to allow users to view and choose one or more values from a dynamically generated list of choices. The list items are DN or CN values retrieved from the Identity Vault. You can display the full DN or CN or use the PickList properties to specify the attributes to display instead.

Figure 5-25 Sample PickList Control without DN Masking




Figure 5-26 Sample PickList Control with DN Masking




Table 5-25 PickList Control Properties

Property Name	Description
<i>Allow multiple selections</i>	<p>When this option is set to True, the user can select more than one list value using their platform-specific multi-select keys.</p> <p>When this option is set to True, the control displays a minimum of three lines regardless of the value specified in the Number of lines displayed property. If this value is False, the Number of lines displayed property is used.</p>
<i>Display expression</i>	<p>Leave this value blank if you want to display the full DN or CN value.</p> <p>If you want to format the DN or CN by displaying attributes instead, launch the Expression Builder and select the desired attributes from the list. (You must first specify an <i>Entity key for DN expression lookup</i>.)</p> <p>For example, to show the user entity's first and last name attributes, construct an expression like this: <code>FirstName LastName.</code></p> <p>Make sure the attribute's View, Read, Search, and Required properties are set to True in the directory abstraction layer. See Section 3.7.2, "Attribute Properties," on page 69.</p>
<i>Entity key for DN expression lookup</i>	<p>Leave this value blank if you want to display the full DN or CN value retrieved from the Identity Vault.</p> <p>If you want to mask the DN or CN by displaying attributes instead, choose the entity from the drop-down list and specify a set of attributes in the Display expression property.</p> <p>The entity you choose must:</p> <ul style="list-style-type: none"> ◆ Have the directory abstraction layer View property set to True. ◆ Be the entity whose DN you are retrieving from the Identity Vault.

Property Name	Description
<i>Field cell style</i>	<p>Apply an HTML style attribute to the field body.</p> <p>Example: padding-top:5px;background-color:red</p>
<i>Field CSS class name(s)</i>	<p>Apply one or more CSS class styles to the field body. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i>, then clicking the <i>Preview</i> button for the portal theme you are using.</p> <p>If you leave the field blank, it defaults to the nv-fontExtraSmall class.</p> <p>Example: nv-fontMedium nv-backgroundColor3</p> <p>Separate class names with spaces.</p>
<i>Field width in pixels</i>	<p>Use this field to configure the field's visible width on the form. The default is 200 pixels.</p>
<i>Label cell style</i>	<p>Apply an HTML style attribute to the field label.</p> <p>Example: color:red</p>
<i>Label CSS class name(s)</i>	<p>Apply one or more CSS class styles to the field label. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i>, then clicking the <i>Preview</i> button for the portal theme you are using.</p> <p>If you leave the field blank, it defaults to the nv-formFieldLabel class.</p> <p>Example: nv-color5</p> <p>Separate class names with spaces.</p>
<i>Number of lines displayed</i>	<p>The number of lines displayed by the control. This is not the number of records retrieved or displayed, but the vertical size of the control. If you set this number to 10 and there are only 5 records to display, the control size is still 10 lines.</p> <p>The number of lines displayed is related to the Allow multiple selections setting. When Allow multiple selections is set to True, the number of lines displayed is always 3 (or more). When Allow multiple selections is set to False, you can set the number of lines to 1 or to 3 or greater. You cannot set it to 2 because it does not leave enough space for the browser to display scroll bars. If you set it to 2, Designer generates a warning in the Project Checker view and resets it to 3.</p>
<i>Show 2 lists</i>	<p>When this option is set to True, two lists are displayed. A list on the left displays the unselected values, and the list on the right displays the selected values.</p> <p>The Allow multiple selections property must be set to True. If set to false <i>Show 2 lists</i> is ignored.</p>

Property Name	Description
<i>Sort Entries</i>	When this option is set to True, sorts results in ascending order. For details, see “Sort Order” on page 128 .

TIP: To retrieve user-entered values for this control, use `flowdata.getObject()` and not `flowdata.get()`. If you use `flowdata.get()`, you get only the first value.

For more information on displaying the control with a preselected option, see [Section 9.2.3, “Form Control Examples,” on page 324](#).

5.5.20 Static List

Use this control to display a list of items in a drop-down list from which users can select a single item. The list items are static and are stored with the provisioning request definition. The text “Click here to select” only appears if the field is not set to Required.

Figure 5-27 Sample Static List Control


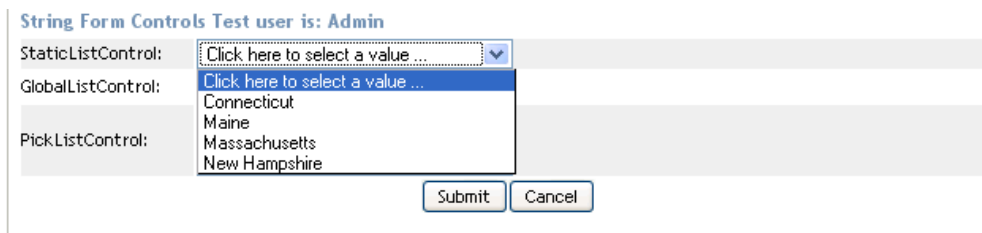


Table 5-26 Static List Properties

Property Name	Description
<i>Autoselect first value</i>	Allows you to configure the form to automatically select the first value in the static list. You can select <i>yes</i> , <i>no</i> , or <i>only if required is true</i> . If you select <i>only if required is true</i> , the form only automatically selects the first value in the list if the value of the default <i>Required</i> property is <i>true</i> .
<i>Field cell style</i>	Apply an HTML style attribute to the field body. Example: <code>padding-top:5px;background-color:red</code>
<i>Field CSS class name(s)</i>	Apply one or more CSS class styles to the field body. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i> , then clicking the <i>Preview</i> button for the portal theme you are using. If you leave the field blank, it defaults to the <code>nv-fontExtraSmall</code> class. Example: <code>nv-fontMedium nv-backgroundColor3</code> Separate class names with spaces.
<i>Field width in pixels</i>	Use this field to configure the field's visible width on the form. The default is 200 pixels.

Property Name	Description
<i>Label cell style</i>	Apply an HTML style attribute to the field label. Example: color:red
<i>Label CSS class name(s)</i>	Apply one or more CSS class styles to the field label. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i> , then clicking the <i>Preview</i> button for the portal theme you are using. If you leave the field blank, it defaults to the nv-formFieldLabel class. Example: nv-color5 Separate class names with spaces.
<i>List item</i>	Allows you to define a set of labels and values that comprise the static list. Click the <i>List property</i> button to launch the list value dialog box shown here:

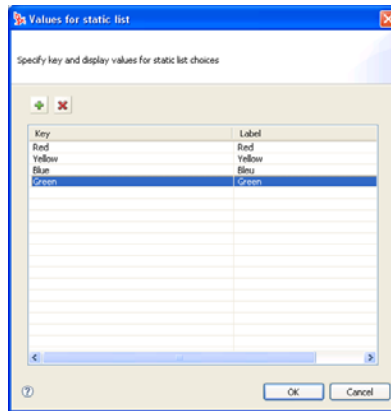

Click *Add* to add list items. Each list item must have a unique key. The dialog box automatically generates a unique key when you insert a new list item. You can click the key name and change it. A blank key (null) is valid, so it is possible to have a list item with a blank key and a blank label. The displayed label is the one defined for the default language.

5.5.21 Text

Use the Text control for data display or user input. User input is validated depending on the control's data type.

Figure 5-28 Sample Text Control



Table 5-27 Text Control Properties

Property Name	Description
<i>Field cell style</i>	Apply an HTML style attribute to the field body. Example: padding-top:5px;background-color:red
<i>Field CSS class name(s)</i>	Apply one or more CSS class styles to the field body. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i> , then clicking the <i>Preview</i> button for the portal theme you are using. If you leave the field blank, it defaults to the nv-fontExtraSmall class. Example: nv-fontMedium nv-backgroundColor3 Separate class names with spaces.
<i>Field width in pixels</i>	Use this field to configure the field's visible width on the form. The default is 200 pixels.
<i>Label cell style</i>	Apply an HTML style attribute to the field label. Example: color:red
<i>Label CSS class name(s)</i>	Apply one or more CSS class styles to the field label. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i> , then clicking the <i>Preview</i> button for the portal theme you are using. If you leave the field blank, it defaults to the nv-formFieldLabel class. Example: nv-color5 Separate class names with spaces.
<i>Lower bounds (for numbers only)</i>	The lowest number allowed for decimal or integer values.
<i>Maximum length</i>	The maximum length for string values. Blocks input when this length is reached.
<i>Minimum length</i>	The minimum length for string values. Validates that the user enters a string at least this long.
<i>Number of characters allowed</i>	Specifies the number of characters a user is allowed to enter. This is related to Field width in pixels .
<i>Upper bound (for numbers only)</i>	The highest number allowed for decimal or integer values.
<i>Validation Mask (regular expression)</i>	An expression used for validating the field's data. Designer provides a default set of validation masks by default. You must enable them through <i>Windows > Preferences > Provisioning > Validation Mask</i> . For more information, see Section 2.3, "Setting Provisioning View Preferences," on page 23 .

5.5.22 Text Area

Use this control to display or accept input of multi-line data. Users can select multiple lines of data using the multi-select key combination for their platform.

Figure 5-29 Sample Text Area Control




Table 5-28 Text Area Control Properties

Property Name	Description
<i>Field cell style</i>	Apply an HTML style attribute to the field body. Example: padding-top:5px;background-color:red
<i>Field CSS class name(s)</i>	Apply one or more CSS class styles to the field body. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i> , then clicking the <i>Preview</i> button for the portal theme you are using. If you leave the field blank, it defaults to the nv-fontExtraSmall class. Example: nv-fontMedium nv-backgroundColor3 Separate class names with spaces.
<i>Label cell style</i>	Apply an HTML style attribute to the field label. Example: color:red
<i>Label CSS class name(s)</i>	Apply one or more CSS class styles to the field label. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i> , then clicking the <i>Preview</i> button for the portal theme you are using. If you leave the field blank, it defaults to the nv-formFieldLabel class. Example: nv-color5 Separate class names with spaces.
<i>Number of columns displayed</i>	The visible width of the control; the number of characters wide.
<i>Number of lines displayed</i>	The number of lines to display at one time.

5.5.23 Title

Use this read-only control to label your form or provide instructions.

Table 5-29 Title Control Properties

Property Name	Description
<i>Display title in signed form document</i>	When this option is set to False and the form is a signed form (using digital signatures), the title control is not displayed.
<i>Font-size</i>	Specify small, medium, or large.
<i>Style class</i>	Choose a font style (such as bold) and colors from a palette.

5.5.24 TrueFalseCheckBox

Use this control to allow the user to select or deselect a choice. The values returned by the control are `true` (selected) and `false` (not selected). The returned values are always strings.

NOTE: This control returns a boolean value of `True` or `False` depending on the selection made by the user. The display values of the control can be set to a more user friendly or informative value such as `Yes/No` or `Accept/Reject` depending on the intended use of the form; however, the underlying value always returns either `True` or `False`. If the control is used to return anything other than `True` or `False` or more than two values, for example (`Yes/No/Maybe`), by default it returns the value as `False` if it is not `True`.

You can initialize the control from a JavaScript Boolean Object. The `field.getValue()` returns a JavaScript Boolean Object.

Use `setValues(["true"])` not `setValues[true]`, the `setValues()` method expects a string or an array of string values.

Table 5-30 TrueFalseCheckBox Control Properties

Property Name	Description
<i>Field cell style</i>	Apply an HTML style attribute to the field body. Example: <code>padding-top:5px;background-color:red</code>
<i>Field CSS class name(s)</i>	Apply one or more CSS class styles to the field body. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i> , then clicking the <i>Preview</i> button for the portal theme you are using. If you leave the field blank, it defaults to the <code>nv-fontExtraSmall</code> class. Example: <code>nv-fontMedium nv-backgroundColor3</code> Separate class names with spaces.
<i>Field width in pixels</i>	Use this field to configure the field's visible width on the form. The default is 200 pixels.
<i>Label cell style</i>	Apply an HTML style attribute to the field label. Example: <code>color:red</code>

Property Name	Description
<i>Label CSS class name(s)</i>	<p>Apply one or more CSS class styles to the field label. You can view the classes that are available for your User Application portal by logging into the User Application, navigating to <i>Administration > Application Configuration > Theme Administration</i>, then clicking the <i>Preview</i> button for the portal theme you are using.</p> <p>If you leave the field blank, it defaults to the <code>nv-formFieldLabel</code> class.</p> <p>Example: <code>nv-color5</code></p> <p>Separate class names with spaces.</p>

5.5.25 TrueFalseRadioButtons

Use this control to display a choice of True or False as a set of radio buttons.

Figure 5-30 Sample TrueFalseRadioButtons Control

TrueFalseRadiobuttons: False True


This control has no custom properties.

NOTE: This control returns a Boolean value of True or False depending on the selection made by the user. The display values of the control can be set to a more user friendly or informative value such as Yes/No or Accept/Reject depending on the intended use of the form; however, the underlying value always returns either True or False. If the control is used to return anything other than True or False or more than two values, for example (Yes/No/Maybe), by default it returns the value as False if it is not True.

5.5.26 TrueFalseSelectBox

Use this control to display a choice of True or False in a drop-down list.

Figure 5-31 Sample TrueFalseSelectBox Control



NOTE: This control returns a Boolean value of True or False depending on the selection made by the user. The display values of the control can be set to a more user friendly or informative value such as Yes/No or Accept/Reject depending on the intended use of the form; however, the underlying value always returns either True or False. If the control is used to return anything other than True or False or more than two values, for example (Yes/No/Maybe), by default it returns the value as False if it is not True.

Table 5-31 TrueFalsSelectBox Properties

Property Name	Description
<i>Field width in pixels</i>	Use this field to configure the field's visible width on the form. The default is 200 pixels.

5.6 Working with Distinguished Names

The following controls provide specialized support for distinguished names (DNs):

- ◆ [DNDisplay](#)
- ◆ [DNLookup](#)
- ◆ [DNMaker](#)
- ◆ [MVEditor](#)
- ◆ [PickList](#)

This section describes the specialized support, including the following:

- ◆ [Section 5.6.1, "Formatting DNs," on page 163](#)
- ◆ [Section 5.6.2, "Working with Object Selectors," on page 163](#)

5.6.1 Formatting DNs

If you have a DN value, you can display either the DN or a set of attributes related to that DN. For example, if the control displays the DN of a user entity, you could display the user entity's First Name and Last Name attributes instead. The controls that support this feature are DNDisplay, DNLookup, MVEditor, and Picklist.

You define the attributes to display in the control's Display Expression property. This display expression resolves at runtime by replacing the attribute keys with the attribute values.

5.6.2 Working with Object Selectors

In some cases, you might want the user to search for and select a DN from a list of possible values. The object selector dialog box (also called the object lookup dialog box) provides this functionality. The contents of the object selector dialog box are controlled by the form control's properties (see [Table 5-32](#)), and by how DAL properties are defined (see ["DNLookup Control Type Definitions and Object Selector Contents" on page 164](#)).

The object selector only supports attributes of String or DNLookup data types whose directory abstraction layer access properties for required and searchable are set to true.

Table 5-32 Properties for Defining the Object Selector Dialog Box

Property	Description
<i>Entity key for DN expression lookup</i>	This is the key to the directory abstraction layer entity whose DN you want to search for or display. This is a required field.

Property	Description
<i>Object selector type</i>	<p><i>paramlist</i>: Causes the object selector dialog box to perform an object lookup. You specify the lookup criteria via the Entity key for DN expression lookup property.</p> <p><i>container</i>: Causes the object selector dialog box to display one or more containers for selection. The containers for searching are determined by the Search container property that is specified in the directory abstraction layer for the entity named in the Entity key for DN expression lookup property. For example, if the Entity key for DN expression lookup property is Group, the search container is set to <code>%group-root%</code> by default. If no entity is specified you will get an error message about missing or bad Container Selector properties</p>
<i>Show object selector button</i>	If this option is set to True, the object selector button shows up on the control. Otherwise, it does not.

DNLookup Control Type Definitions and Object Selector Contents

When you specify an Entity key for DN expression lookup, the object selector's contents are defined by the attribute's DNLookup control type definition (in the directory abstraction layer). For example, if you specified the User entity as the object lookup and the manager as the attribute, the object selector would allow the user to search on the First Name and Last Name attributes because the object selector uses the manager's DNLookup control type definition to determine the lookup criteria. The DNLookup definition for the manager entity is shown in [Figure 5-32](#).

Figure 5-32 Manager Attribute on User DNLookup Property Definition

UI Control

Specify any formatting or special controls used in displaying the attribute:

Data Type:

Format Type:

Control Type:

DNLookup Display

Select the Entity and Attributes to display for the Lookup operation:


Lookup Entity:

Lookup Attributes

Perform Automatic Query

The resulting object selector is shown in [Figure 5-33](#).

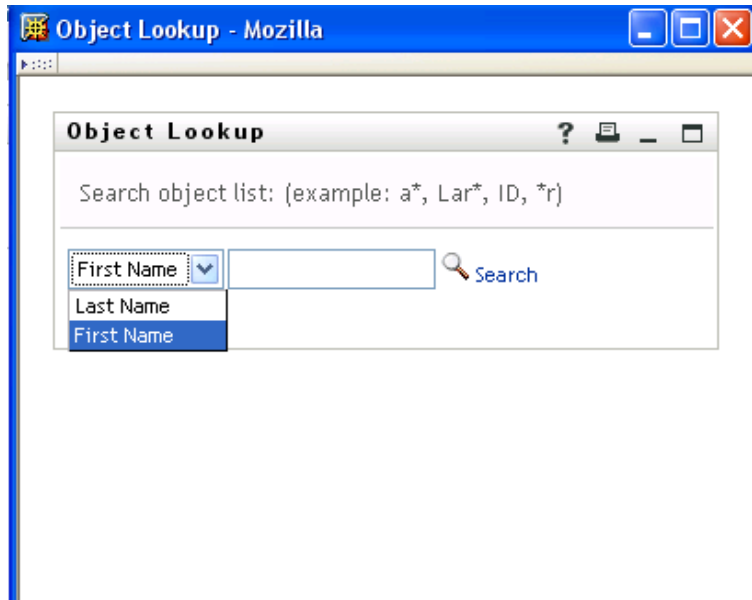Figure 5-33 Sample Object Selector



You can change the attributes that are used by the object selector by changing the Lookup attributes. To allow other attributes in the object selector:

- 1 Determine if the desired attribute is defined for the entity specified as the Lookup Entity. (In this example, it is Manager Lookup.)
- 2 If the attribute you want is available on the lookup entity, you can just add it to the Lookup Attributes. Make sure that it has the Search and Read properties set to True; otherwise, they won't appear in the object selector dialog box.
- 3 If the attribute does not already exist for the Lookup Entity, you must do the following:
 - ◆ Add the attribute to the Lookup Entity. For example, to display another attribute in a manager lookup like the one above, add the attribute to the Manager Lookup entity. For more information, see [Section 3.2.3, "Adding Attributes," on page 53](#).
 - ◆ Add the attribute to the DNLookup definition.
 - ◆ Deploy the changed definitions. In this example, you'd redeploy the Manager Lookup entity (if you added a new attribute to its definition) and the User entity because you changed the definition of the manager attribute.
 - ◆ Refresh the application server's DirectoryAbstractionLayerDefinitions cache.

5.7 Using DAL Queries in Forms

The Query objects defined in the directory abstraction layer let you predefine LDAP searches that you can then execute from a workflow form. The information in this section illustrates how you can define a query and use it in a form.

Suppose that you want to distribute calling cards to certain employees, but you only want to distribute calling cards to employees who work at home, and whose homes are located outside of the local office's area code. You create a workflow form that allows the employee to:

- ◆ Verify that they qualify to receive a card.
- ◆ Submit a request for a card if they do qualify.

On your form, you allow users to enter the area code of their own local office (and based on that area code) review a list of users that qualify for a card. The runtime form is shown in [Figure 5-34](#).

Figure 5-34 Sample Calling Card Request Form

The screenshot shows a Mozilla Firefox browser window displaying the Novell Identity Manager interface. The page title is "Resource Request - Mozilla Firefox" and the URL is "http://localhost:8080/IDM/createAFResourceRequest.do". The page is titled "Request Resource" and is Step 3 of 3. The form contains the following information:

- Resource: CallingCard
- Recipient: Bill Brown
- Resource Search Criteria: Accounts
- Description: CallingCard


The form detail section is titled "Get A Calling Card for Calls Outside Your Local Office Area Code" and includes an "OfficeAreaCode" field with the value "212". Below this, a message states: "The Calling Card is for Work At Home Employees Who Live Outside the Area Code of the Local Office". A "Candidates" picklist control shows the following list:

- Allison Blake (555) 555-1222
- Angie Chung (555) 555-1208
- Anthony Palani (555) 555-1202

A note below the picklist states: "If you do not see your name in the above list you do not qualify for the calling card, please press Cancel." The form includes "Submit" and "Cancel" buttons.

The data in the Candidates Picklist control is populated from the results of a query that is defined as shown in [Figure 5-35](#).

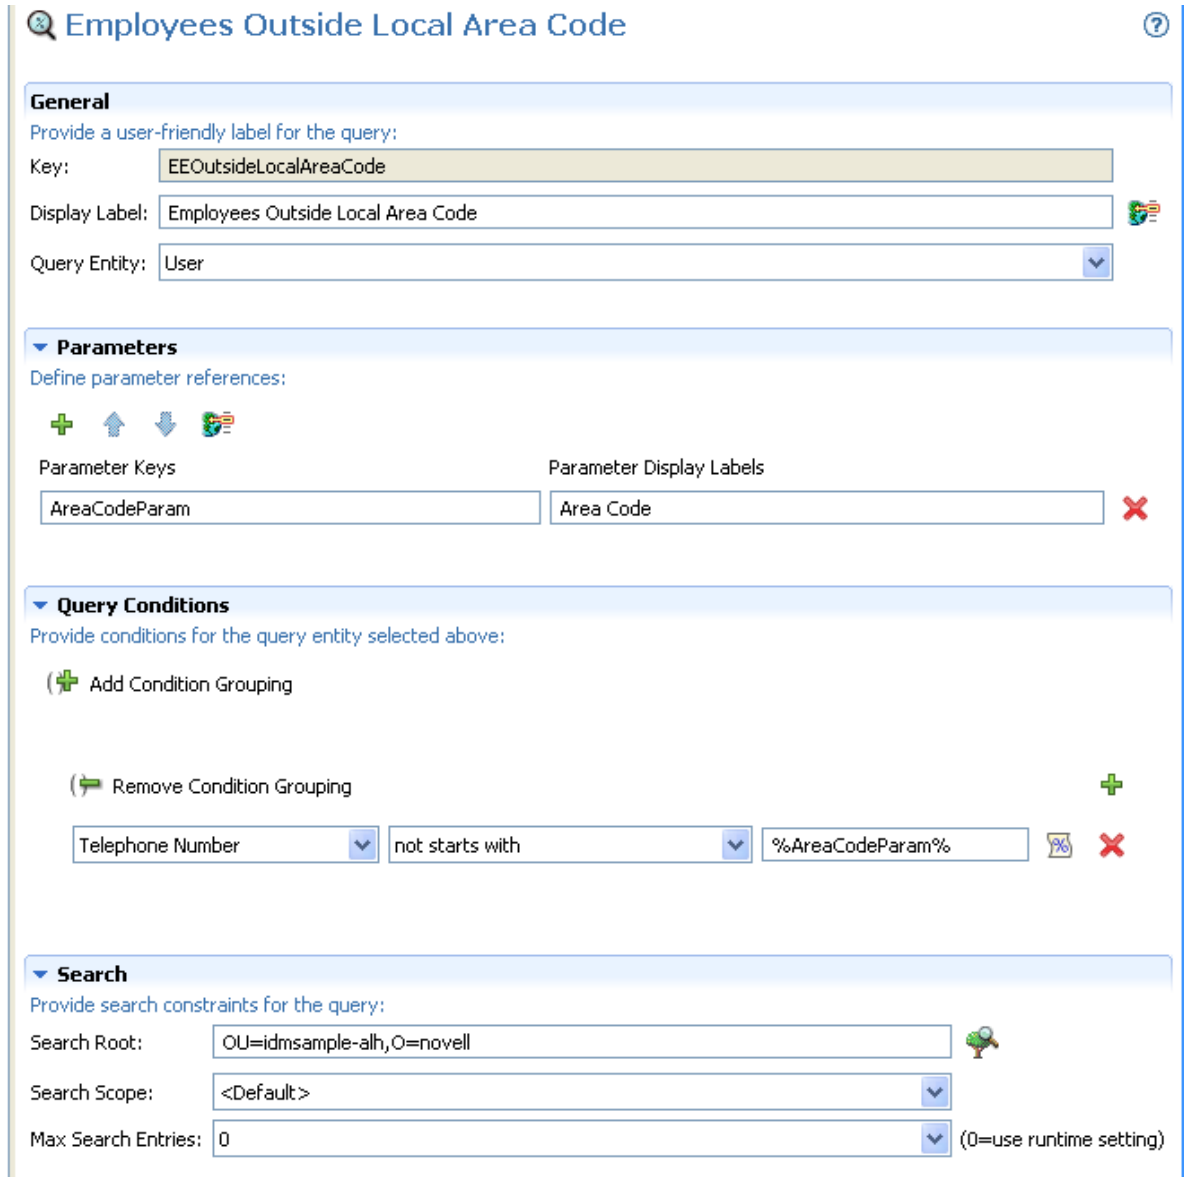Figure 5-35 Calling Card Queries Definition



Employees Outside Local Area Code

General
Provide a user-friendly label for the query:
Key:
Display Label:
Query Entity:

Parameters
Define parameter references:
Parameter Keys: Parameter Display Labels:

Query Conditions
Provide conditions for the query entity selected above:
(+) Add Condition Grouping
(-) Remove Condition Grouping
Telephone Number

Search
Provide search constraints for the query:
Search Root:
Search Scope:
Max Search Entries: (0=use runtime setting)

The query takes a single input parameter, *AreaCodeParam*, for the user-entered area code. The query then searches the *User* entity (in the *idmsample-ah* container) and returns the users whose telephone numbers do not start with the same value entered in the *AreaCodeParam*.

The form has an input field called *OfficeAreaCode*. It is the text field where the user enters the area code of the local office. The properties for *OfficeAreaCode* are show in [Figure 5-36](#).

Figure 5-36 OfficeAreaCode Properties

Form Controls

Form Field Name	Data Type	Control Type	Linebreaks
title	string	Title	1
OfficeAreaCode	string	Text	1
title2	string	Title	1
Candidates	dn	PickList	1
title3	string	Title	1


Property	Value
Display Label	OfficeAreaCode
Editable	true
Required	false
Visible	true
Multivalued	false
Events	onchange
Field width in pixels	200
lower bound (for Numbers only)	
Maximum length	3
Minimum length	3
Number of characters allowed	40
Tooltip	
Upper bound (for Numbers only)	
Validation Mask(regular expression)	

Fields | Actions | Scripts

Notice that the Text control defines an *onchange* event. The *onchange* event fires when the user tabs from the Text control. The *onchange* event fires the *getCandidates* custom event as shown in [Figure 5-37](#).

When the event is fired, the `getCandidates` event performs an action expression that calls the `globalQuery()` method (as shown in Figure 5-39). This method populates the value of the `Candidates` PickList control with the results of the query called `EEOutsideLocalAreaCode` (defined in Figure 5-35 on page 167). It passes the value of the `OfficeAreaCode` text field as the query's input parameter `AreaCodeParam`.

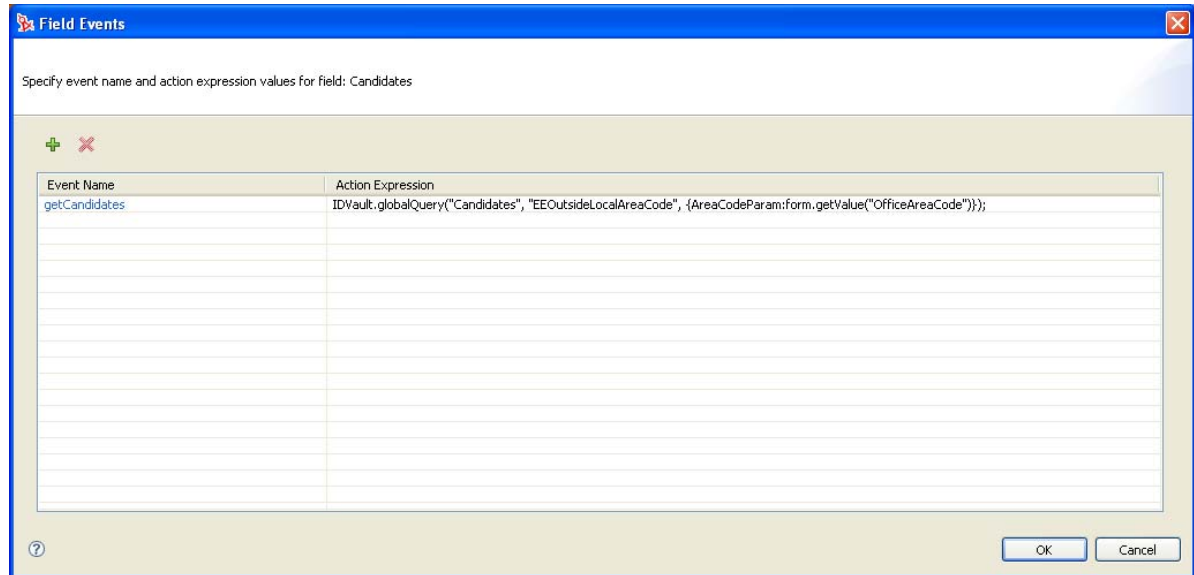Figure 5-39 *GetCandidates Event*



5.8 Printing Forms

You can add a *Print* button to a request form by using JavaScript.

TIP: Approval forms automatically contain a *Print* button.

To add the ability to print a request form, add the URL to the JavaScript library `PrintForm.js`. The library is located in the User Application WAR at this URL: `./javascript/JUICE/form/PrintForm.js`. Two techniques for including a print button are described below:

- To display a print preview popup when submitting a request form (after data is validated), add the following to the form onload event:

```
form.interceptAction("SubmitAction", "around",
    function (invocation)
        {var pf = new PrintForm("SubmitAction");
          pf.printFormInterceptor(invocation);
        }
    );
```

- To add a *Print* button next to one of the fields on your form, add the following script to the field's onload event:

```
var ctrl = JUICE.UICtrlUtil.getControl(field.getName());
var btn = JUICE.UICtrlUtil.addButton(ctrl, "printid", "Print", "Print",
    "javascript:var p = new PrintForm();
    p.printFormAfterValidation(\"printid\");");
```

5.9 Providing Direct Access to a Form

If you want users to be able to go directly to a form, you need to make some changes within the WAR file for the User Application and redeploy the WAR file.

- 1 In the `WEB-INF/struts-config.xml` file, specify `roles="authUser"` within the following action statement:

```
<action path="/getAFResourceList" scope="request" name="apwaListForm"
type="com.novell.srvprv.apwa.actions.GetResourceList" roles="authUser">
```

- 2 Also in the `WEB-INF/struts-config.xml` file, specify `roles="guest, authUser"` within the following action statement:

```
<action path="/createAFResourceRequest" scope="request" name="apwaDetail"
type="com.novell.srvprv.apwa.actions.ProcessResourceRequest"
roles="guest,authUser">
```

- 3 Also in the `WEB-INF/struts-config.xml` file, add the following action mapping:

```
<action path="/getGuestResourceList" scope="request" name="apwaListForm"
type="com.novell.srvprv.apwa.actions.GetResourceList" roles="guest">
  <forward name="success" path="tiles.guestResourceList"/>
  <forward name="displaySelector" path="tiles.guestSelector"/>
</action>
```

- 4 In the `WEB-INF/tiles-defs.xml` file, add the following definitions:

```
<definition name="tiles.guestSelector" extends=".unauthenticatedLayout">
  <put name="title" value="JSP_TITLE_SELECTOR"/>
  <put name="body" value="/jsp/tiles/selector.jsp"/>
</definition>
<definition name="tiles.guestResourceList" extends=".unauthenticatedLayout">
  <put name="title" value="JSP_TITLE_RESOURCE_LIST"/>
  <put name="body" value="/jsp/tiles/resourceList.jsp"/>
</definition>
```

- 5 Redeploy the WAR file.

The URL for accessing a form directly must use this format:

```
http://localhost:8080/IDMProv/
getAFResourceList.do?apwaLeftNavItem=JSP_MENU_RESOURCE_REQUEST_CLASSIC&wfdn=PRDEFD
N
```

The parameter `PRDEFDN` must be replaced with the DN of the request definition. Here's a complete example that includes this parameter:

```
http://localhost:8080/IDMProv/
getAFResourceList.do?apwaLeftNavItem=JSP_MENU_RESOURCE_REQUEST_CLASSIC&wfdn=cn=Tes
tPRDEF,cn=RequestDefs,cn=AppConfig,cn=Test-Antelope,cn=TestDrivers,o=novell
```

6 Creating the Workflow for a Provisioning Request Definition


This section provides details on creating the workflow for a provisioning request definition. Topics include:

- ♦ [Section 6.1, “About the Workflow Tab,” on page 173](#)
- ♦ [Section 6.2, “Adding Activities to a Workflow,” on page 177](#)
- ♦ [Section 6.3, “Adding Flow Paths,” on page 182](#)
- ♦ [Section 6.4, “Configuring Flow Paths,” on page 182](#)
- ♦ [Section 6.5, “Guidelines for Creating Workflows,” on page 184](#)
- ♦ [Section 6.6, “Guidelines for Creating Roles Based Workflows,” on page 192](#)
- ♦ [Section 6.7, “Guidelines for Creating Resource Based Workflows,” on page 201](#)
- ♦ [Section 6.8, “Debugging a Workflow,” on page 207](#)
- ♦ [Section 6.9, “Provisioning Multiple Individuals with One Workflow Instance,” on page 208](#)
- ♦ [Section 6.10, “Making Distinguished Name References Portable,” on page 210](#)
- ♦ [Section 6.11, “Configuring Digital Signature Support,” on page 210](#)

6.1 About the Workflow Tab

You use the *Workflow* tab to display the Workflow page. You use the Workflow page to define the behavior of the workflow for the provisioning request definition. The Workflow page consists of a canvas, a palette, and associated views.

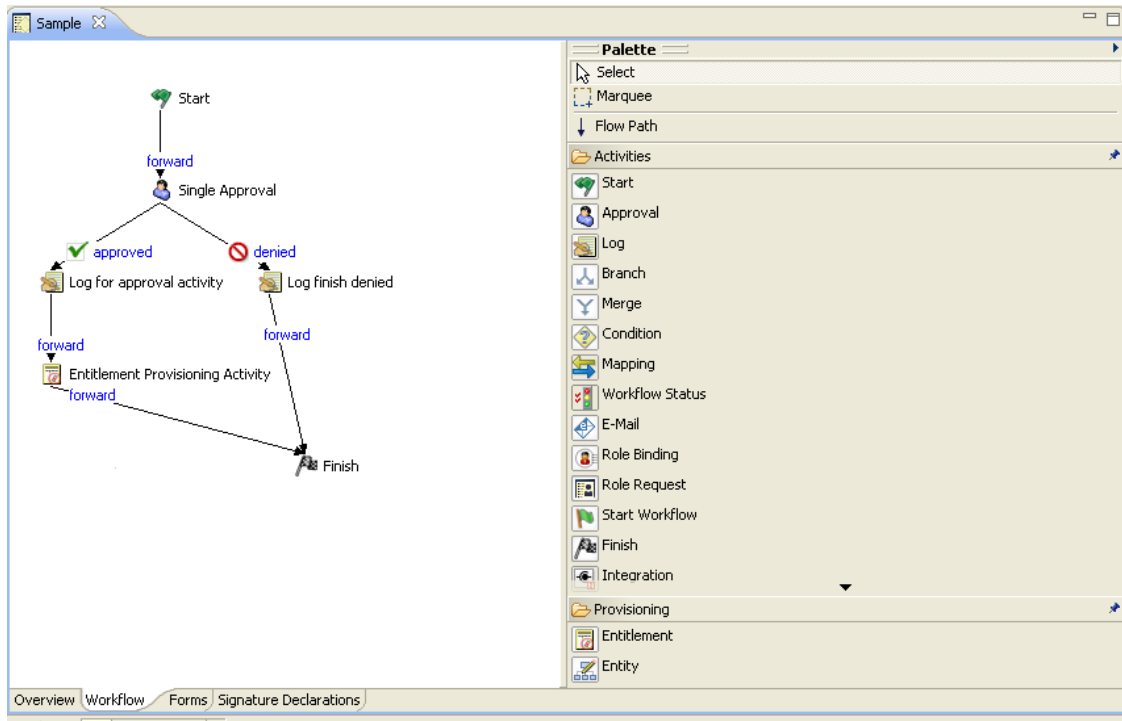Figure 6-1 Workflow Page



6.1.1 Canvas

The canvas provides a graphical view of the activities in the workflow. When you create a new provisioning request definition that is not based on a template, the canvas is blank except for a Start activity and Finish activity.

If you right-click anywhere on the canvas, a menu is displayed. The menu includes the following commands:

Table 6-1 Workflow Menu

Item	Description
Delete	Deletes the selected activity or flow path.
Show Activity Ids	<p>Switches the workflow editor between displaying activity names and Activity Ids.</p> <p>Use the Activity Id property to specify a meaningful value for the Activity Id. By default, the value is <i>ActivityNN</i> where <i>NN</i> is a unique number (associated with the order in which the activity was added to the palette). When errors associated with activities are detected during validation, Designer identifies the activity in which the error occurred by activity ID. When this is the case, turn on the display of activity IDs in order to locate the activity on the canvas.</p> <p>You can specify whether activity names or activity Ids are displayed by default by choosing <i>Window > Preferences > Provisioning > Workflows > Diagram Preferences > Show Activity Ids</i>.</p>

Item	Description
<i>Show Flow Path Types</i>	Turns the display of flow path types (for example, forward, approved, denied) on and off. When <i>Show Flow Path Types</i> is turned on, a label is displayed on each flow path indicating the flow path type.
<i>Show Properties</i>	Displays the Properties view for the selected activity. If no activity is selected, it displays the Properties view for the Workflow itself.
<i>Show Data Item Mapping</i>	Displays the Data Item Mapping view for the selected activity.
<i>Show E-Mail Notification</i>	Displays the E-Mail Notification view for the selected activity.


You can use the *Zoom* and *Scale* sliders on the toolbar to make it easier to view the workflow:

- ♦ **Zoom:** Increases or decreases the magnification of the workflow display. You can make portions of the workflow display larger and view more detail, or make the workflow display smaller and view more of the workflow. Click the rectangle to the right of the *Zoom* slider to return to 100% magnification.
- ♦ **Scale:** Increases or decreases the spacing between items in the workflow display. For example, if your workflow has items with many flowpaths between them, you can increase the scale to make it easier to see individual flow paths. Click the rectangle to the right of the *Scale* slider to return to 100% scale.

6.1.2 Palette

The palette provides icons for activities that can be dragged onto the canvas to create the workflow. It also provides tools for manipulating the icons and for linking activities:

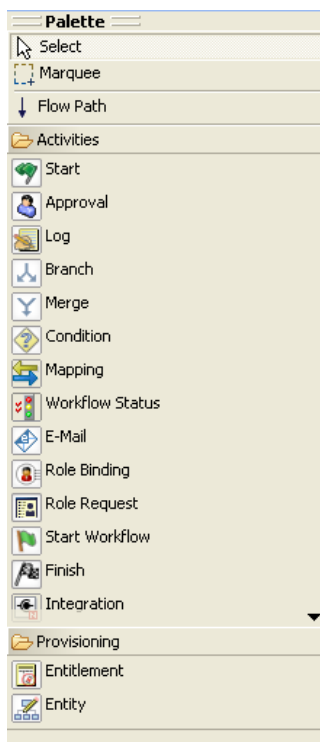Figure 6-2 Workflow Palette



The palette includes the following tools:


Table 6-2 Workflow Palette

Tool	Description
Select	Selects individual nodes or flow paths. To select a node, click the Select tool, then click a node.
Marquee	Selects multiple nodes or flow paths. Use this tool to move items as a group. To select multiple items, click the Marquee tool, then click in an area outside of the items that you want to select. Hold down the mouse button and drag over the items that you want to select, then release the mouse button. When multiple items are selected, only the properties for the first item selected are displayed in the Properties view (see Section 6.1.3, "Views," on page 176 for information about Views).
Flow Path	Creates flow paths between nodes. Flow paths provide connection logic for connecting nodes. For information about connecting nodes, see Section 6.3, "Adding Flow Paths," on page 182.
Activities (for example, Start, Approval, Log)	Inserts the selected activity into the workflow. For information about adding activities, see Section 6.2, "Adding Activities to a Workflow," on page 177. For detailed descriptions of the activities, see Chapter 7, "Workflow Activity Reference," on page 213.

6.1.3 Views

The Workflow page also includes the Properties, Data Item Mapping, and E-Mail Notification views:

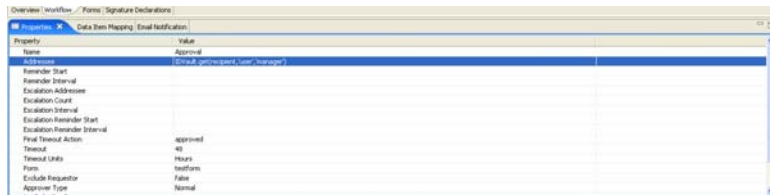Figure 6-3 Workflow Views



You can right-click the icon for an activity to select a view from a context menu. Not all activities utilize all views. The following table identifies the views and the activities that use them:

Table 6-3 Views for Activities

Activity	Properties	E-Mail Notification	Data Item Mapping
Start	X		X
Approval	X	X	X
Log	X		
Branch	X		
Merge	X		
Condition	X		

Activity	Properties	E-Mail Notification	Data Item Mapping
Mapping	X		X
Workflow Status	X		X
E-Mail	X	X	
Role Binding	X		
Resource Request	X		
Role Request	X		
Start Workflow	X		X
Finish	X	X	
Rest	X		X
Integration	X		X
Entitlement	X		X
Entity	X		X

6.2 Adding Activities to a Workflow

- 1 Click the *Workflow* tab. A graphical representation of the workflow for the provisioning request definition is displayed:



Because every workflow must have a Start activity and Finish activity, these activities are added to the canvas automatically. The Start Activity is connected to the Finish Activity with a forward link.


- 2 To add an activity to the workflow, click the icon for the desired activity in the palette and drag the icon onto the workspace.

You can insert an activity between activities that are linked by a flow path by dropping the activity onto the flow path. For information about defining flow paths between activities, see [Section 6.3, “Adding Flow Paths,” on page 182](#). After you have added an activity to the workflow, you should set the properties of the activity (see [Section 6.2.1, “Setting the General Properties of an Activity,” on page 177](#)). For detailed information about configuring the different types of activities, see [Chapter 7, “Workflow Activity Reference,” on page 213](#) and [Chapter 8, “Working with Integration Activities,” on page 267](#).


6.2.1 Setting the General Properties of an Activity

- 1 Right-click the activity icon for which you want to set properties and select *Show Properties* from the menu.

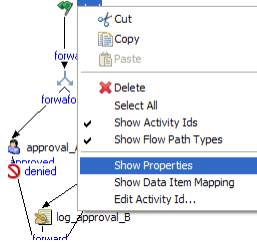You can also display the *Properties* tab by selecting *Show Properties* from the *PRD* menu.



The Properties view is displayed:



- Click in the column for a property to set the property. For information about the properties for each activity, see [Chapter 7, “Workflow Activity Reference,”](#) on page 213.

Each activity has a default name. We strongly recommend that you replace the default names of activities with a descriptive Activity Id that describe the specific purpose of the activity in the workflow. This makes it easier to understand the workflow when you look at the graphical display of the workflow. It also makes comments displayed in the User Application easier to understand. For example, the following figures show comments in the User Application using default IDs and descriptive IDs.

Figure 6-4 Activities in User Comments Using Default Names

Date	Activity	User	Comments
01/04/2007 04:55:54 PM	First approval	IDMProv	User task assigned to reviewer Margo MacKenzie
01/04/2007 04:56:27 PM	First approval	IDMProv	User task claimed by reviewer Margo MacKenzie
01/04/2007 04:56:33 PM	First approval	IDMProv	User task approved by reviewer Margo MacKenzie
01/04/2007 04:56:33 PM	Second approval	IDMProv	User task assigned to reviewer Human Resources
01/04/2007 04:56:38 PM	Second approval	IDMProv	User task claimed by reviewer Jane Smith

1 - 5 of 7

Show User Comments
 Show System Comments

Refresh Close

Figure 6-5 Activities in User Comments Using Descriptive Names

Date	Activity	User	Comments
01/04/2007 05:04:52 PM	Manager Approval	IDMProv	User task assigned to reviewer Margo MacKenzie
01/04/2007 05:05:17 PM	Manager Approval	IDMProv	User task claimed by reviewer Margo MacKenzie
01/04/2007 05:05:20 PM	Manager Approval	IDMProv	User task approved by reviewer Margo MacKenzie
01/04/2007 05:05:21 PM	HR Approval	IDMProv	User task assigned to reviewer Human Resources
01/04/2007 05:05:50 PM	HR Approval	IDMProv	User task claimed by reviewer Jane Smith

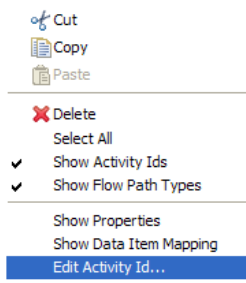
1 - 5 of 7

Show User Comments
 Show System Comments


Refresh Close

To change the Activity Id:


- Right-click the activity icon for which you want to change the Activity Id and select *Edit Activity Id*.



The Edit Activity Id wizard displays.

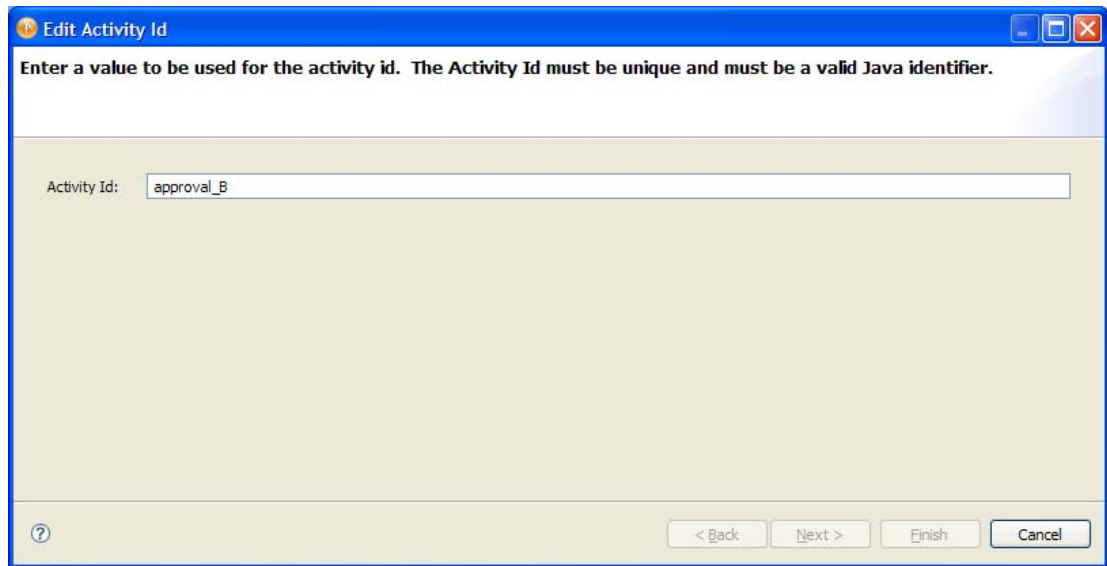

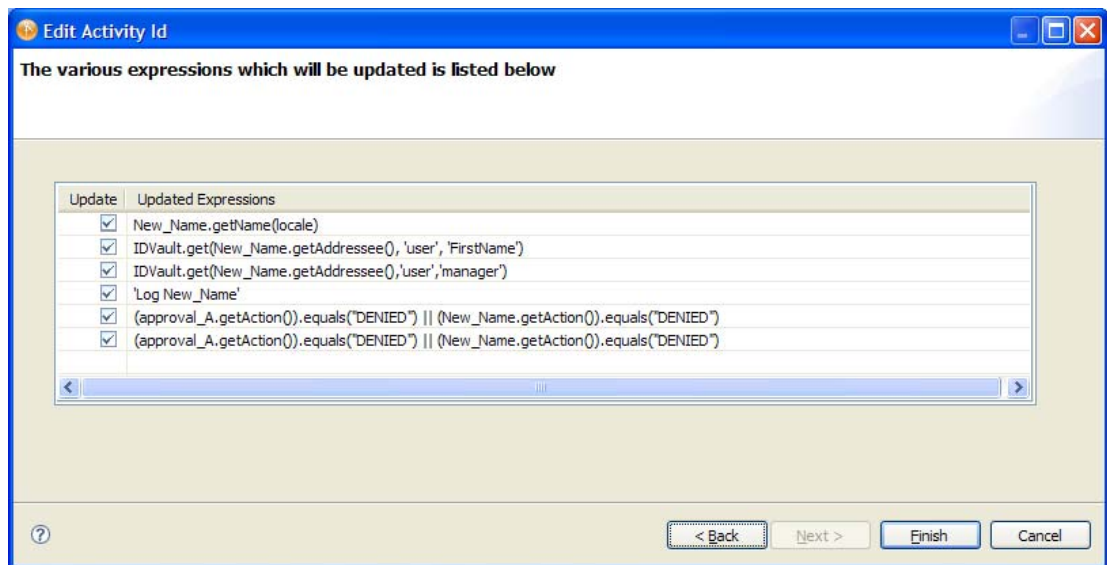- 2 Type the Activity Id name you want to use. The name can include letters, numbers, and the underscore (`_`) character.
- 3 If the activity was not used to define any expressions, click *Finish*. If the activity was used in expressions, click *Next*. The wizard displays the expressions where the Activity Id should be updated with the new name.



- 4 Review the items displayed in the panel. For items that you do not want updated, deselect the checkbox in the Update column.
- 5 Click *Finish* when complete.


6.2.2 Defining the Data Item Mappings

You use the Data Item Mapping view to map data from the data flow into fields in a form (pre-activity mapping) and to map data from the form back to the data flow (post-activity mapping).

- 1 Right-click the activity icon for which you want to set data item mappings and select *Show Data Item Mapping* from the menu.

You can also display the *Data Item Mappings* tab by selecting *Show Data Item Mapping* from the *PRD* menu.

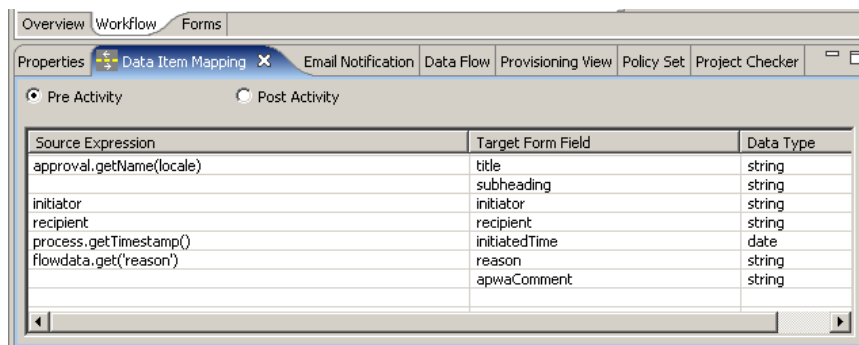The Data Item Mapping view is displayed:



- 2 For pre-activity mapping, click in the *Source Expression* field for the item that you want to map, then specify an expression. For post-activity mapping, click in the *Target Expression* field for the item that you want to map, then specify an expression.

Pre-activity maps can be used for

- ◆ Initializing form control values.
- ◆ Setting default values for form controls.
- ◆ Populating complex form controls with data lists derived from LDAP queries.
- ◆ Passing data from form controls of a previous activity to a form control in the current activity.
- ◆ Calling external Java classes to process data.

Post-activity maps can be used for

- ◆ Creating new data items in flowdata.
- ◆ Moving form control data from an activity into flowdata.
- ◆ Calling external Java classes to process data.

For detailed information about data item mapping for the different types of activities, see [Chapter 7, “Workflow Activity Reference,”](#) on page 213.

The Start Activity can have hard-coded strings, system variables like process locale and recipient, and Identity Vault expressions (created using the ECMA Expression Builder VDX Expr Panel) in pre-activity maps.

Leave the Source Expression blank in pre-activity maps for form fields that the user is expected to fill in. Alternatively, create a source expression to supply a default value for form fields that the user is expected to fill in. In either case the form field needs to be defined as editable. See [Section 5.5.4, “General Form Control Properties,” on page 128](#) for information about setting the properties of form fields.


6.2.3 Defining the E-Mail Notification Settings

You use the *E-Mail Notification* view to select an e-mail template, and to specify expressions to provide values for named parameters included in the e-mail template. E-mails are sent when a new Approval activity starts (to notify approvers that they have work to do) and when the Finish activity completes (to notify the initiator that the workflow is done).

- 1 Right-click the activity icon for which you want to set properties and select *Show E-Mail Notification* from the menu.

You can also display the *E-Mail Notification* tab by selecting *Show E-Mail Notification* from the *PRD* menu.

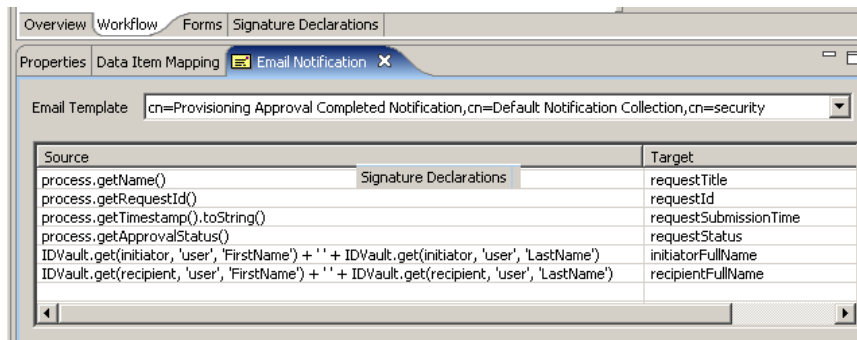The *E-Mail Notification* view is displayed:



- 2 Click the *E-Mail Template* field, then select an e-mail template from the list of defined templates.

Editing an e-mail template: You can edit an e-mail template in Designer. To do this, select an Identity Vault in the *Modeler*, then scroll to *Default Notification Collection* in the *Outline View*. Right-click a template, then select *Edit Template*.

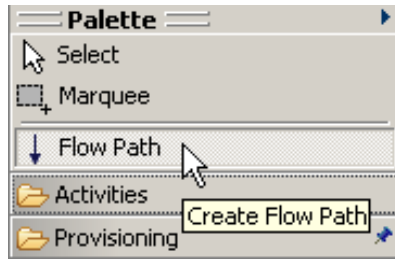
Localized e-mail templates: By default, Designer displays the default e-mail notification templates. When you select a default template, the e-mail is in the user’s default language (if the default is a supported language). You can set the *Show all localized e-mail templates* preference to True so that Designer also allows you to select from the list of localized e-mail templates. The localized templates have the same name as the default, but the Java language code is appended to the name of the e-mail template. For example, cn=Provisioning Notification Activity_es, cn=Default Notification Collection, cn=security indicates this is the Spanish language version of this template. When you select a localized template, the e-mail is in the language of the template regardless of the user’s default language.

- 3 Click in the *Source* field for a *Target* token and specify an ECMAScript expression that assigns a value to the token.

See [Chapter 7, “Workflow Activity Reference,” on page 213](#) for information about e-mail notification settings.

6.3 Adding Flow Paths


- 1 Click the Flow Path tool in the palette:



The mouse pointer turns into a flow path pointer:



- 2 Click the activity from which you want the flow path to begin, then click the activity on which you want the flow path to end:



The activities are connected.

- 3 To configure the flow path, click the Select tool in the palette, right-click the flow path, then select *Show Properties*.

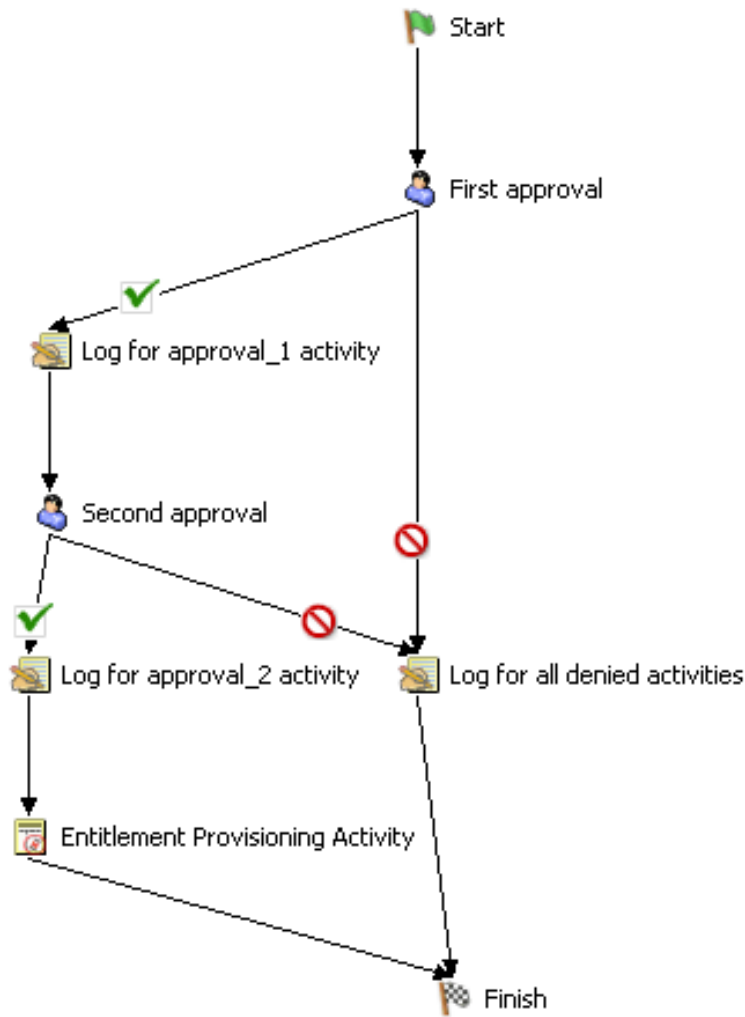
For information about configuring flow paths, see [Section 6.4, "Configuring Flow Paths,"](#) on page 182.

6.4 Configuring Flow Paths


After you have added a flow path to a workflow diagram, you can specify the path type. For details on adding flow paths to a workflow, see [Section 6.3, "Adding Flow Paths,"](#) on page 182.

To configure a flow path:

- 1 Click the flow path in the workflow diagram.



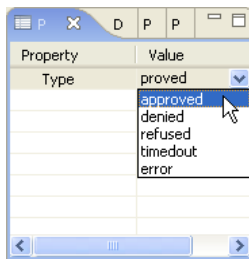2 Set the flow type on the *Properties* tab by selecting one of the options in the *Type* drop-down list.



The flow path types are described in the following table:

Flow Type	Description
forward	Forwards control to the next activity in a workflow. The forward flow path is available after all activities except: <ul style="list-style-type: none">◆ Approval◆ Condition◆ Finish
approved	Determines what happens when a user approves a request. The approved flow path is valid only after the Approval activity.
denied	Determines what happens when a user denies a request. The denied flow path is valid only after the Approval activity.
refused	Determines what happens when a user refuses a request. The refused flow path is valid only after the Approval activity.
timeout	Determines what happens when an Approval activity times out because the user did not respond. The timeout flow path is valid only after the Approval activity.
error	Determines what happens when an Approval or Condition activity terminates with an error. The error flow path is valid only after the Approval and Condition activities.
true	Determines what happens when a conditional expression evaluates to True. The True flow path is valid only after the Condition activity.
false	Determines what happens when a conditional expression evaluates to False. The False flow path is valid only after the Condition activity.

If the *Properties* tab is not displayed, right-click the flow path in the workflow diagram and select *Show Properties*.

6.5 Guidelines for Creating Workflows

To create well-formed workflows, you need to understand the rules for adding activities and flow paths. In addition, you need to understand how to manipulate workflow data. See the following topics:

- ◆ [Section 6.5.1, “Rules for Activities,” on page 185](#)
- ◆ [Section 6.5.2, “Rules for Flow Paths,” on page 185](#)
- ◆ [Section 6.5.3, “Understanding Workflow Data,” on page 187](#)

NOTE: You can validate a provisioning request definition before you deploy it. For more information, see [Section 2.6, “Validating Provisioning Objects,” on page 24](#).

6.5.1 Rules for Activities

When adding activities to a workflow, follow these rules:

- ♦ A workflow must have only one Start activity and one Finish activity.
- ♦ A workflow can have zero or more of the following activity types:

Approval activity

Log activity

Branch activity

Merge activity

Condition activity

Mapping activity

Workflow Status

E-Mail activity

Role Request activity

Role Request Binding activity

Start Workflow

Rest activity

Integration activity

Entitlement activity

Entity activity

- ♦ Each Branch activity must have a corresponding Merge activity.
- ♦ The role activities (Role Request and Role Request Binding) can only be used for workflows that support roles.
- ♦ The resource activities (Resource Request and Resource Request Binding) can only be used for workflows that support resources.
- ♦ To ensure that the provisioning step is performed, a workflow must have at least one Entitlement activity or Entity activity.

6.5.2 Rules for Flow Paths

When adding flow paths to a workflow, follow these rules:

- ♦ With the exception of the Start activity, all activities can have one or more incoming flow paths. The Start activity cannot have any incoming flow paths.
- ♦ The Finish activity cannot have any outgoing flow paths.
- ♦ There can be only one flow path out of the Start activity. The flow path type must be forward.
- ♦ There can be between one and five flow paths out of the Approval activity. The valid flow path types are approved, denied, refused, timedout, and error. At runtime, only one of the flow paths is executed.
- ♦ There can be only one flow path out of the Entitlement, Entity, Log, and Merge activities. The flow path type must be forward.
- ♦ There can be two or three flow paths out of the Condition activity. The valid flow path types are true, false, and error. The true and false flow paths are required; the error flow path is optional.
- ♦ There can be one or more flow paths out of the Branch activity. The flow path type must be forward for each path. At runtime, all of the flow paths execute.

- ♦ Flows paths out of Role Binding activities must connect to the Finish activity.
- ♦ There can be between one and three flow paths out of the Rest activity. The valid flow path types are forward, error, and timeout.

The following table summarizes the rules for adding flow paths into and out of an activity:

Table 6-4 Number of Flow Paths Permitted for Each Activity

Activity	Inbound Paths	Outbound Paths
Start	0	1 Must always be forward.
Approval	1 to n	1 to 5 Approved, denied, refused, timedout, or error
Log	1 to n	1 Must always be forward
Branch	1 to n	1 to n
Merge	1 to n	1 Must always be forward
Condition	1 to n	2 to 3 True and false are required; error is optional
Mapping	1 to n	1
Workflow Status	1 to n	1 Must always be forward
E-Mail	1 to n	1 Must always be forward
Role Request Binding	1	1 Must always be forward and connect to Finish activity
Role Request	1	2 forward, error
Resource Request Binding	1	1 Must always be forward and connect to Finish activity
Resource Binding	1	2 forward, error
Start Workflow	1	2 forward, error
Finish	1 to n	0
Rest	1 to n	
Integration	1 to n	1 to 4 Success, timedout, error, fault
Entitlement	1 to n	1 Must always be forward
Entity	1 to n	1 Must always be forward

The following table summarizes which activity types can be a source or target for each of the available flow path types:

Table 6-5 Flow Path Types Allowed for Each Activity

Activity	Forward	Approved	Denied	Refused	Timedout	True	False	Error	Success	Fault
Start	Source									
Approval	Target	Source/Target	Source/Target	Source/Target	Source/Target	Target	Target	Source/Target		

Activity	Forward	Approved	Denied	Refused	Timeout	True	False	Error	Success	Fault
Log	Source/Target	Target	Target	Target	Target	Target	Target	Target		
Branch	Source/Target	Target	Target	Target	Target	Target	Target	Target		
Merge	Source/Target	Target	Target	Target	Target	Target	Target	Target		
Condition	Target	Target	Target	Target	Target	Source/Target	Source/Target	Source/Target		
Mapping	Source	Target	Target	Target	Target	Target	Target	Target		
Workflow Status	Source/Target									
E-Mail	Source/Target									
Role Request Binding	Source/Target	Target	Target	Target	Target			Target		
Role Request	Source/Target	Target	Target	Target	Target			Source/Target		
Resource Request Binding	Source/Target	Target	Target	Target	Target			Target		
Resource Request	Source/Target	Target	Target	Target	Target			Source/Target		
Start Workflow	Source/Target	Target	Target	Target	Target			Source/Target		
Finish	Target	Target	Target	Target	Target	Target	Target	Target		
Rest	Source/Target	Target	Target	Target	Source/Target	Target	Target	Source/Target	Target	Target
Integration	Source/Target	Target	Target	Target	Source/Target	Target	Target	Source/Target	Source	Source
Entitlement	Source/Target	Target	Target	Target	Target	Target	Target	Target		
Entity	Source/Target	Target	Target	Target	Target	Target	Target	Target		

6.5.3 Understanding Workflow Data

When you're creating a workflow, you can manipulate workflow data to suit the needs of your provisioning application.

- ◆ [“Data Objects and Variables” on page 188](#)
- ◆ [“Creating New Data Items” on page 190](#)

- ♦ “Modifying Data Items” on page 190
- ♦ “Working with Complex Data Item Mappings” on page 190
- ♦ “Moving Form Control Data to Flowdata” on page 191
- ♦ “Moving Flowdata to Form Controls” on page 191
- ♦ “About Mapping Activity Operations” on page 191

Data Objects and Variables

The workflow uses a single process object to manage information about the process. A separate activity object is created for each activity in the workflow and form data is maintained for each activity that provides for user interaction.

The data objects associated with each user interface control on a form (text field, drop-down list, and so forth) can be modified immediately prior to the execution of the corresponding activity (Start activity or Approval activity). In addition, this data can be retrieved immediately after execution of the activity. After control has been passed to the next activity, the form control data is no longer available. For this reason, the workflow provides a special object called flowdata that allows you to define your own data items. You can add your own variables to this object to keep track of information that is important to your workflow, including form data that would otherwise be lost.

The following table summarizes the categories of workflow data:

Table 6-6 *Categories of Workflow Data*

Data Object	Lifetime	Editable	Creator
process	Workflow	No	System
activities	Workflow	No	System
activity forms	Activity	Yes	System and workflow designer
flowdata	Workflow	Yes	Workflow designer

NOTE: The workflow designer is the person who creates the workflow in Designer.

The following table describes the variables for each type of object:

Table 6-7 *Data Variables in a Workflow*

Object	Variable	Description
process	approvalStatus	The current status of the process.
	category	The provisioning category (for example, Entitlements) selected by the person who initiated the request.
	container dn	The distinguished name of the container defined for the user application at install time.
	description	The description of the provisioning request definition.
	group container dn	The distinguished name of the group container defined for the user application at install time.

Object	Variable	Description
	id	The unique IDVault ID (CN) of the provisioning request definition.
	initiator	The distinguished name of the person who initiated the request.
	locale	The current locale.
	name	The workflow process name.
	provisioning driver dn	The distinguished name of the provisioning driver defined for the user application at install time.
	recipient	The distinguished name of the intended target of the provisioned resource.
	user container dn	The distinguished name of the user container defined for the user application at install time.
	requestID	The ID for the provisioning request.
	timestamp	The time the process was initiated.
<i>approval-activity-name</i>	action	The action taken by the user.
	addressee	The current addressee for the approval activity.
	name	The name of the activity.
	timestamp	The time that the activity was queued on the work list.
	user	The user who is associated with the current activity.
	workId	The system generated unique ID of the current workflow activity.
<i>form-name</i>	<i>custom-form-controls</i>	Any user interface control you add to a form.
flowdata	<i>custom-variables</i>	Any custom variables you create to hold data needed for the workflow. If you use one of the installed templates to create your workflow, the flowdata object can have a variable called <i>reason</i> , which contains text copied from the reason field on the initial request form.

You can reference these objects in ECMAScript expressions. Script expressions in a workflow can at any time refer to data items that are bound upstream in the flow. However, workflow expressions cannot refer to data items that are created downstream (because these data items don't exist yet) or to data bound on other branches in a flow that supports parallel processing (because these branches could be executing concurrently with the current activity).

Creating New Data Items

You can create a new data item on the flowdata object by specifying a post-activity target expression on the *Data Item Mapping* tab for the Start or Approval activities. If you specify a name for a new data item in the *Target Expression* column, this automatically creates the variable. Any activity executed after this activity can then access the data item.

For example, you might want to map the form field called *reason* to the target expression `flowdata.myReason`. The variable `myReason` then becomes a new data item that is available to all activities executed later in the workflow.

Modifying Data Items

You can modify a data item by specifying a pre-activity expression on the *Data Item Mapping* tab for the Start or Approval activities. For example, to prepend a dollar sign to a price, you might map the following source expression to a target form field called *Price*:

```
"$" + flowdata.get('cost')
```

When the form displays to the user, the Price data appears as follows:

```
$xx.xx
```

Another example might be computing the total cost by adding the tax to the base cost. To do this, you could map the following source expression to a target form field called *TotalCost*:

```
Number(flowdata.get('cost')) + Number(flowdata.get('tax'))
```

Working with Complex Data Item Mappings

All data in the flowdata object is maintained in XML, so you can create data items in a hierarchical fashion as well. For example, suppose you have a workflow form that allows a user to ask for access to two internal systems, one for accounts payable and one for receivables. Suppose the form has (among other fields) two Yes/No fields named *Acct_Pay* and *Acct_Rec*. In the post-activity data item mappings, you might create two mappings as follows:

Table 6-8 Complex Data Item Mapping Examples

Source Form Field	Target Expression
<i>Acct_Pay</i>	<code>flowdata.SystemAccess/AcctPay</code>
<i>Acct_Rec</i>	<code>flowdata.SystemAccess/AcctRec</code>

This would create an XML element named `SystemAccess` with two child elements named `AcctPay` and `AcctRec`. One reason to structure data in this way is for clearer organization and management of data in complex workflows containing many forms and data items. To retrieve data from these hierarchies, the following syntax would be used:

```
flowdata.get('SystemAccess/AcctPay')
```

For complete details on building ECMAScript expressions, see [Chapter 9, “Working with ECMAScript Expressions,”](#) on page 315.

Moving Form Control Data to Flowdata

All form controls you create (except for `DNDisplay`) are automatically made available for use in pre-activity and post-activity expressions on the *Data Item Mapping* tab for the activity that uses the form. For example, suppose you want to make a user's entry data in control `ACONTROL` on form `AFORM` in `AACTIVITY` available for use in a subsequent activity. To do this, you would select `AACTIVITY` in the workflow, select the *Data Item Mapping* tab, and click the *Post Activity Mapping* radio button. Next to the source form field `ACONTROL`, you would then enter a target expression in the following format:

```
flowdata.my_ACONTROL
```

Any subsequent activity in the workflow would then be able to access this data by using pre-activity source expressions such as these:

```
flowdata.get('my_ACONTROL')  
flowdata.getObject('my_ACONTROL')
```

Moving Flowdata to Form Controls

You can also move flowdata values into form controls. The simplest case is moving a single text value into a form control. In the example above, suppose `ACONTROL` is a simple text entry field. In this case, to move it into another text entry field in an activity called `ZACTIVITY`, you would select `ZACTIVITY` in the workflow, select the *Data Item Mapping* tab, and click the *Pre Activity Mapping* radio button. Next to the target form field, you would then enter this source expression:

```
flowdata.my_ACONTROL
```

To move more complex form control data (for example, a `MultiValue DN` control) into another form control, you can use the `getObject()` expression syntax. For example, assuming `ACONTROL` is a `MultiValue DN` control, you could use this source expression:

```
flowdata.getObject('my_ACONTROL')
```

To move data into a form control, you need to be aware of type constraints. For example, you should not try to move text-based data into a numeric control, or a Boolean value into a DN control.

About Mapping Activity Operations

In the mapping activity, the source expressions are evaluated before they are assigned to the target expression. If the source expression does not exist prior to the mapping activity, no value is assigned to the target expression.

For example, if `flowdata.get("textfield")` maps to `flowdata.copyoftextfield` and `flowdata.get("copyoftextfield")` maps to `flowdata.copyoftextfield2`, the value of `flowdata.copyoftextfield2` is empty at the end of the mapping activity because the value of the `flowdata.copyoftextfield` is assigned only after the mapping activity.

To assign values to the target expression, you can use either of these options:

- ◆ Multiple mapping-activities.
- ◆ Single mapping-activity but repeat the source expression.

Source Expression	Target Expression
flowdata.get('textfield')	flowdata.copyoftextfield
flowdata.get('textfield')	flowdata.notcopyoftextfield2

When you repeat the source expression, the `flowdata.get("textfield")` maps to `flowdata.copyoftextfield` and `flowdata.get("textfield")` maps to `flowdata.copyoftextfield2`.

6.6 Guidelines for Creating Roles Based Workflows

Roles based workflows must follow the same guidelines outlined in [Section 6.5, “Guidelines for Creating Workflows,” on page 184](#). In addition, roles based workflows have their own unique requirements. They are described in the following sections:

- ♦ [Section 6.6.1, “About Role Approval Workflows,” on page 192](#)
- ♦ [Section 6.6.2, “Writing Custom Role Workflows,” on page 194](#)
- ♦ [Section 6.6.3, “About Separation of Duties Approval Workflows,” on page 198](#)
- ♦ [Section 6.6.4, “Customizing the Standard Separation of Duties Workflow,” on page 201](#)


6.6.1 About Role Approval Workflows

Role approval workflows are specialized workflows that provide support for role approval and revocation on the User Application’s *Roles* tab. The Roles Based Provisioning Module includes a read-only Role Approval workflow (named Role Approval) whose design pattern supports:

- ♦ The ability to process role approvals in either serial or quorum mode.
- ♦ The retrieval of approver DNs from the role object (`nrfRequest`). If you create a custom workflow, the approvers must be defined in the workflow. However, this might lead to addressee evaluation problems and less security concerning who can approve a role.
- ♦ The ability to display the role using localized display names.
- ♦ All `nrfRequest` object mappings for request and approval forms.
- ♦ Logging and reporting functions.
- ♦ Read-only display of request information. The role approval workflow does not allow changes to the request. Approvers have only the ability to approve or deny the role request.
- ♦ An e-mail notification is sent to all approvers of role approval workflows. A completed notification e-mail is sent upon completion of the role approval workflow. The recipient e-mail address is used when the workflow is intended to be assigned to a user identity.

This pattern is shown in [Figure 6-6 on page 193](#).

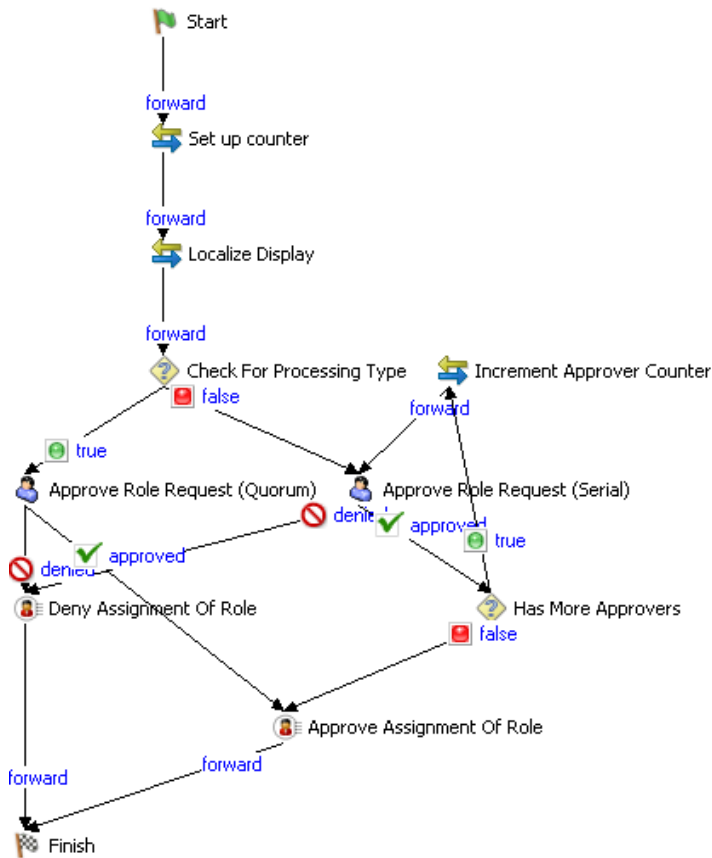Figure 6-6 Default Role Approval Workflow



The components of this workflow, and their responsibilities are summarized in [Table 6-9](#).

Table 6-9 Standard Role Approval Activities

Activity Name	Activity Type	Description
Start	Start	Logical starting point for all workflows. For role approvals it must instantiate the nrfRequest object.
Set up counter	Mapping	Sets up the counter for the number of approvers in case the mode is Serial.
Localize Display	Mapping	Sets up the display labels for each of the associated display names for the user's locale.

Activity Name	Activity Type	Description
Check for Processing Type	Condition	<p>Determines whether the approval is a quorum condition by setting the Condition property to this ECMA expression:</p> <pre>nrfRequest.isQuorumProcess()</pre> <p>If the quorum condition exists, control proceeds to the Approve Role Request (Quorum). If the quorum condition does not exist, control proceeds to the Approve Role Request (Serial).</p> <p>You specify the processing type for the role approval when you set up the Roles Catalog.</p>
Approve Role Request (Quorum)	Approval	<p>This is where the decision to approve or deny the request is recorded as part of the workflow instance. The quorum condition required to make the process successful is retrieved from the nrfQuorum attribute of the nrfRequest object.</p>
Approve Role Request (Serial)	Approval	<p>This is where the decision to approve or deny the request is recorded as part of the data flow associated with the workflow instance.</p> <p>The workflow loops through the list of approvers found in the nrfRequest object. The request is approved if all approvers in the serial process approve the request. The request is denied upon the first rejection from an approver in the serial process</p>
Deny Assignment of Role	Role Binding	<p>Changes the deny attribute in the nrfRequest object to true.</p>
Approve Assignment of Role	Role Binding	<p>Changes the approve attribute in the nrfRequest object to true.</p>
Finish	Finish	<p>Logical end point of all workflows.</p>

To use the standard Role Approval workflow in your user application, you must specify your own users as Trustees. For information on setting the Trustees property, see [Section 4.2.6, “Modifying Settings of a Provisioning Request Definition,” on page 96](#).

6.6.2 Writing Custom Role Workflows

If the standard role approval workflow does not support your business needs, and cannot be customized to do so, you can write your own. At a minimum, a custom role approval workflow must:

- ◆ Contain two Role Binding activities

One Role Binding activity must be set to approved and the other set to denied. You must link each of the Role Binding activities to the Finish activity. If the workflow does not meet this requirement, it is invalid, and Designer prevents you from deploying it. The Role Service driver needs these values to set the status for the workflow and to then apply the logic to associate the role to the identity.


- ◆ Contain the following control in the request form:
 - ◆ Form Field Name: nrfRequestDN

- ◆ Data Type: Role Request
- ◆ Control Type: Text
- ◆ Instantiate the nrfRequestDN in the Pre Activity Data Item Mapping.
- ◆ Contain the following in the Post Activity Data Item Mapping:
 - ◆ Source Form Field: nrfRequestDN
 - ◆ Target Expression: flowdata.nrfRequestDN
 - ◆ Data Type: dn
- ◆ Not contain the following ECMA expressions in the Data Item Mapping or Properties definitions because they might return null:
 - ◆ `getApprovalDN()`
 - ◆ `getAllApproversDN()`
 - ◆ `getAllSodApproversDN()`

Because Designer and the User Application user interface do not allow entry of approvers for custom role approval workflows, you must specify the approvers in the workflow itself. Therefore, if you create a custom workflow based on a copy of the Role Approval or SoD Conflict Approval provisioning request definitions, you must remove the ECMA methods from Data Item Mapping or Properties definitions.

In the following example, a user requests a role and the user's manager approves it.

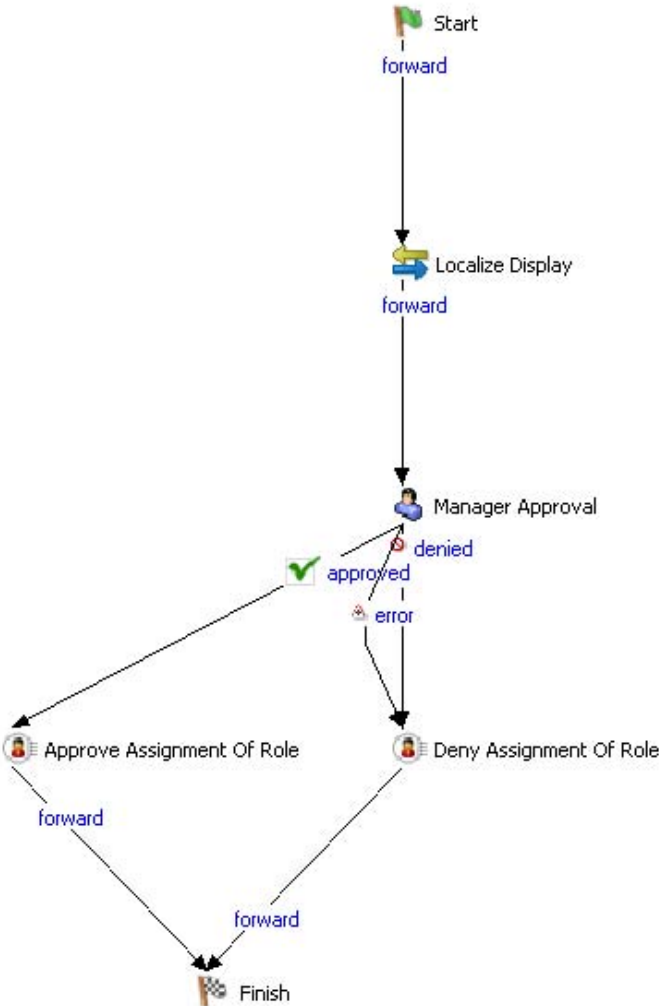Figure 6-7 Sample Custom Role Approval Workflow



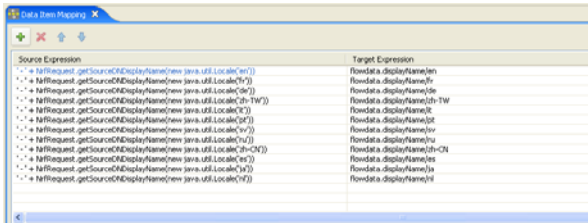
The components of this workflow, and their responsibilities are summarized in [Table 6-10](#).

Table 6-10 Sample Custom Workflow Components

Activity Name	Activity Type	Description
Start	Start	Logical starting point of all workflows.
Localize Display	Mapping	Sets up the display labels for the user's locale.
Manager Approval	Approval	This is where the decision to approve or deny the request is recorded as part of the workflow instance. The role request approval is needed only by the requestor's manager.
Approve Assignment of Role	Role Binding	Changes the approve attribute in the nrfRequest object to true.
Deny Assignment of Role	Role binding	Changes the deny attribute in the nrfRequest object to true.
Finish	Finish	Logical end point of all workflows.

The data item mapping for the sample custom role approval workflow is defined in [Table 6-11](#)

Table 6-11 Sample Custom Role Approval Workflow Data Item Mapping

Activity Name	Property Type	Property Value																																						
Start	Data Item Pre Activity	Source Expression: None Target Form Field: nrfRequestDN Data Type: dn																																						
	Data Item Post Activity	Source Form Field: nrfRequestDN Target Expression: flowdata.nrfRequest/DN Data Type: DN																																						
Localize Display	Data Item Source and Target mapping																																							
Manager Approval	Addressee Property	Addressee IDVault.get(recipient, 'user', 'manager')																																						
	Data Item Pre Activity	<input checked="" type="radio"/> Pre Activity <input type="radio"/> Post Activity <table border="1"> <thead> <tr> <th>Source Expression</th> <th>Target Form Field</th> <th>Data Type</th> </tr> </thead> <tbody> <tr><td></td><td>title</td><td>string</td></tr> <tr><td></td><td>subheading</td><td>string</td></tr> <tr><td>nrfRequest.getCn()</td><td>RequestNumber</td><td>dn</td></tr> <tr><td>nrfRequest.getRequester()</td><td>RequesterName</td><td>dn</td></tr> <tr><td>nrfRequest.getCategory_LocalString(locale)</td><td>Operation</td><td>string</td></tr> <tr><td>nrfRequest.getSourceDN_DisplayName(locale)</td><td>SourceDN</td><td>string</td></tr> <tr><td>nrfRequest.getTargetDN_DisplayName(locale)</td><td>TargetDN</td><td>string</td></tr> <tr><td>nrfRequest.getRequestDate()</td><td>RequestDate</td><td>date</td></tr> <tr><td>nrfRequest.getStartDate()</td><td>StartDate</td><td>date</td></tr> <tr><td>nrfRequest.getEndDate()</td><td>EndDate</td><td>date</td></tr> <tr><td>nrfRequest.getDescription()</td><td>Description</td><td>string</td></tr> <tr><td>nrfRequest.getStatus_LocalString(locale)</td><td>CurrentStatus</td><td>string</td></tr> </tbody> </table>	Source Expression	Target Form Field	Data Type		title	string		subheading	string	nrfRequest.getCn()	RequestNumber	dn	nrfRequest.getRequester()	RequesterName	dn	nrfRequest.getCategory_LocalString(locale)	Operation	string	nrfRequest.getSourceDN_DisplayName(locale)	SourceDN	string	nrfRequest.getTargetDN_DisplayName(locale)	TargetDN	string	nrfRequest.getRequestDate()	RequestDate	date	nrfRequest.getStartDate()	StartDate	date	nrfRequest.getEndDate()	EndDate	date	nrfRequest.getDescription()	Description	string	nrfRequest.getStatus_LocalString(locale)	CurrentStatus
Source Expression	Target Form Field	Data Type																																						
	title	string																																						
	subheading	string																																						
nrfRequest.getCn()	RequestNumber	dn																																						
nrfRequest.getRequester()	RequesterName	dn																																						
nrfRequest.getCategory_LocalString(locale)	Operation	string																																						
nrfRequest.getSourceDN_DisplayName(locale)	SourceDN	string																																						
nrfRequest.getTargetDN_DisplayName(locale)	TargetDN	string																																						
nrfRequest.getRequestDate()	RequestDate	date																																						
nrfRequest.getStartDate()	StartDate	date																																						
nrfRequest.getEndDate()	EndDate	date																																						
nrfRequest.getDescription()	Description	string																																						
nrfRequest.getStatus_LocalString(locale)	CurrentStatus	string																																						
	Data Item Post Activity	None																																						

Activity Name	Property Type	Property Value
Approve Assignment of Role	Action Property	approved
Deny Assignment of Role	Action Property	denied
Finish		None

6.6.3 About Separation of Duties Approval Workflows


Separation of Duties approval workflows are specialized workflows that allows a Separation of Duties constraint to be overridden. The Roles Based Provisioning Module includes a read-only Separation of Duties Approval workflow (named SoD Conflict Approval) whose design pattern supports:

- ◆ The ability to process SoD conflicts in either serial or quorum mode.
- ◆ The retrieval of SoD approver DNs from the request object (nrfRequest). If you create a custom workflow, the approvers must be defined in the workflow; however, this might lead to addressee evaluation problems and less security concerning who can approve an SoD.
- ◆ The ability to display the SoD using localized display names.
- ◆ All nrfRequest object mappings for request and approval forms.
- ◆ Logging and reporting functions.
- ◆ Read-only display of requests. Approvers can only approve or deny the SoD conflict.
- ◆ An e-mail notification is sent to all approvers per SoD conflict found for SoD workflow approvals. A completed notification e-mail is sent upon completion of the SoD approval workflow. The recipient e-mail address is used when the workflow is intended to be assigned to a user identity.

This pattern is shown in [Figure 6-6 on page 193](#).

The roles subsystem allows one Separation of Duties approval flow for the Role subsystem. If you choose to use a custom SoD approval flow, make sure that it works for all SoD situations.

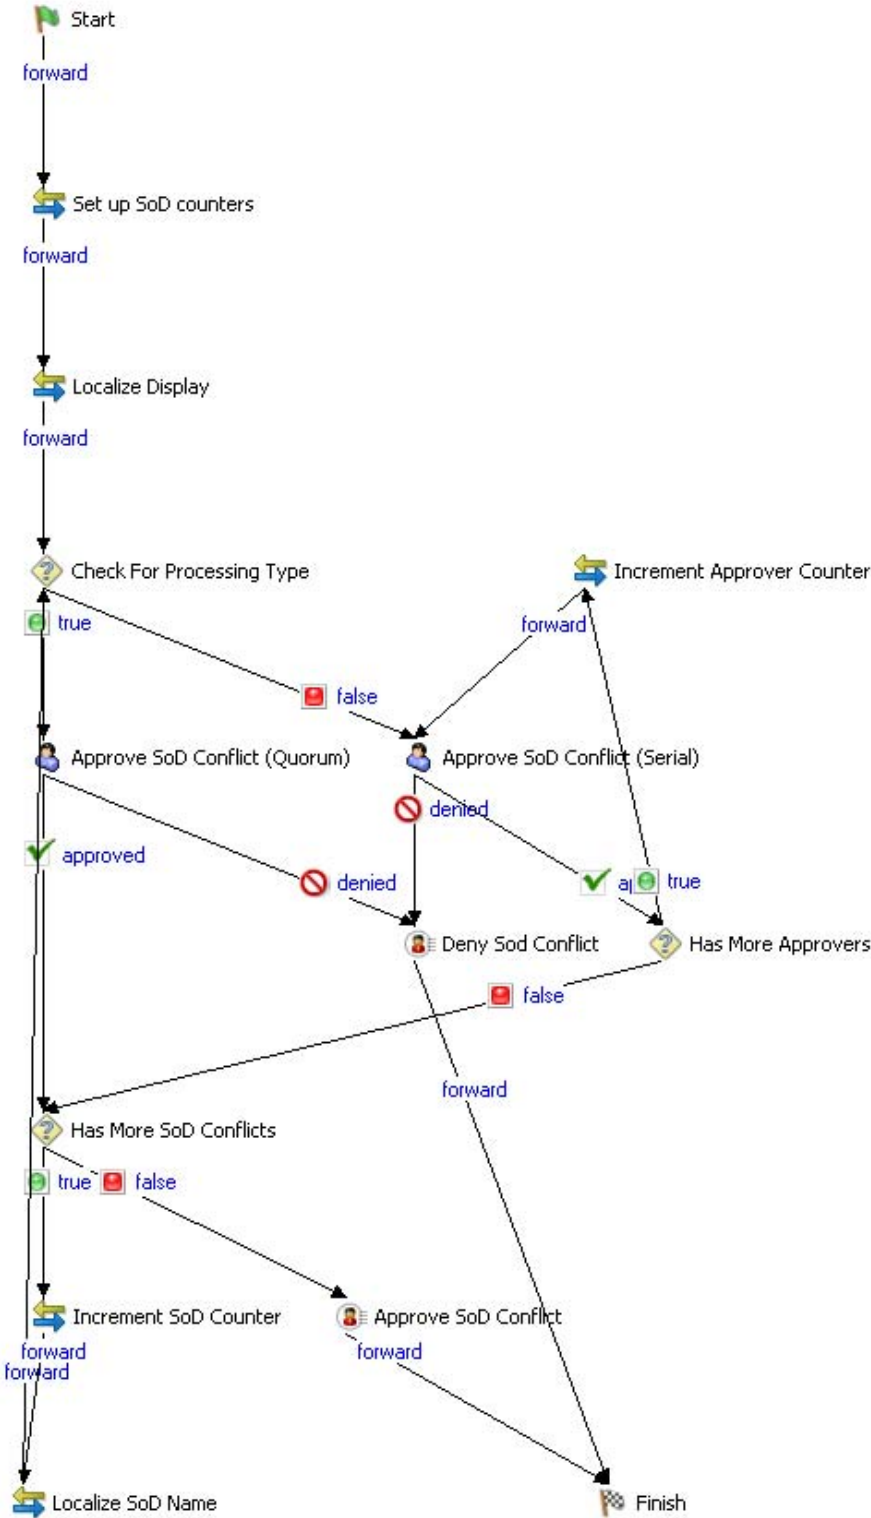Figure 6-8 Standard SoD Approval Workflow



The components of the workflow are described in the following table:


Table 6-12 Standard SoD Constraint Exception Approval Workflow Activities

Activity Name	Activity Type	Description
Start	Start	Logical starting point of all workflows.
Localize Display	Mapping	Sets up the display labels for each of the associated Display Names for the user's locale for the SoD conflicting Role.
Localize SoD Name	Mapping	Sets up the display labels for each of the associated Display Names for the user's locale for the SoD conflicting Role.
Check for Processing Type	Condition	<p>Determines whether the approval is a quorum condition by setting the Condition property to this ECMA expression:</p> <pre>nrfRequest.isSodQuorumProcess()</pre> <p>If the quorum condition exists, control proceeds to the Approve SoD Conflict (Quorum). If the quorum condition does not exist, control proceeds to the Approve SoD Conflict (Serial).</p> <p>You specify the processing type for the role approval when you set up the Roles Catalog.</p>
Approve SoD Conflict (Quorum)	Approval	This is where the decision to approve or deny the request is recorded as part of the workflow instance. The quorum condition required to make the process successful is retrieved from the nrfQuorum attribute of the nrfRequest object.
Approve SoD Conflict (Serial)	Approval	<p>This is where the decision to approve or deny the request is recorded as part of the data flow associated with the workflow instance.</p> <p>The workflow loops through the list of approvers found in the nrfRequest object. The request is approved if all approvers in the serial process approve the request. The request is denied upon the first rejection from an approver in the serial process</p>
Deny SoD Conflict	Role Binding	Changes the deny attribute in the nrfRequest object to true.
Approve SoD Conflict	Role Binding	Changes the approve attribute in the nrfRequest object to true.
Has More SoD Conflicts and Increment SoD Counter	Condition and Mapping activity	Loops through the SoD requests.
Finish	Finish	Logical end point of all workflows.

6.6.4 Customizing the Standard Separation of Duties Workflow

Separation of Duties conflict approval workflows are complex. Therefore, it is not recommended that you write a custom version. Rather, it is recommended that you add new activities to a copy of the standard SoD approval workflow. For example, you might want to add additional logging or messages. This example illustrates a customized workflow that includes a new logging activity.

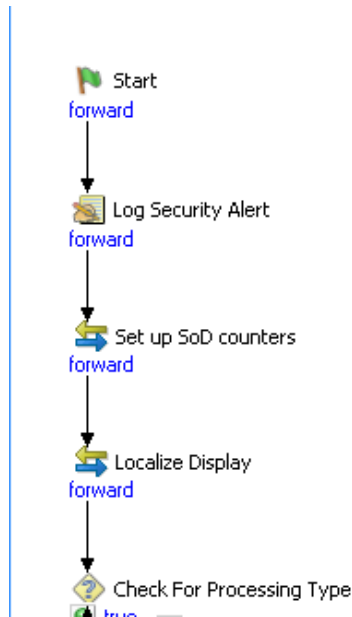Figure 6-9 Adding Activities to the SoD Workflow



The Log Activity properties are shown in [Figure 6-10](#).

Figure 6-10 Log Activity Properties

Property	Value
Name	Log Security Alert
Audit	true
Author	'IDMRoles'
Message	"Security alert for separation of duties conflict. Approval process correlation id is: "+ NrfRequest.getCorrelationId()
Comment	"Security alert for separation of duties conflict. Approval process correlation id is: "+ NrfRequest.getCorrelationId()

SoD Conflict approval workflows must follow the same rules as the role approval workflows as described on [Section 6.6.2, "Writing Custom Role Workflows,"](#) on page 194.

6.7 Guidelines for Creating Resource Based Workflows

Resource based workflows must follow the same guidelines outlined in [Section 6.5, "Guidelines for Creating Workflows,"](#) on page 184. In addition, resource based workflows have the unique requirements described in the following sections:

- [Section 6.7.1, "About Resource Approval Workflows,"](#) on page 202
- [Section 6.7.2, "Writing Custom Resource Workflows,"](#) on page 204


6.7.1 About Resource Approval Workflows

Resource approval workflows are specialized workflows that provide support for resource approval and revocation on the User Application's *Roles* tab. The Roles Based Provisioning Module includes a read-only Resource Approval workflow (named Resource Approval) whose design pattern supports:

- ♦ The ability to process resource approvals in either serial or quorum mode.
- ♦ The retrieval of approver DNs from the resource object (nrfResourceRequest). If you create a custom workflow, the approvers must be defined in the workflow; however, this might lead to addressee evaluation problems and less security concerning who can approve a resource.
- ♦ The ability to display the resource using localized display names.
- ♦ All nrfResourceRequest object mappings for request and approval forms.
- ♦ Logging and reporting functions.
- ♦ Read-only display of request information. The resource approval workflow does not allow changes to the request. Approvers have only the ability to approve or deny the resource request.
- ♦ An e-mail notification is sent to all approvers of resource approval workflows. A completed notification e-mail is sent upon completion of the resource approval workflow. The recipient e-mail address is used when the workflow is intended to be assigned to a user identity.

This pattern is shown in [Figure 6-11 on page 202](#).

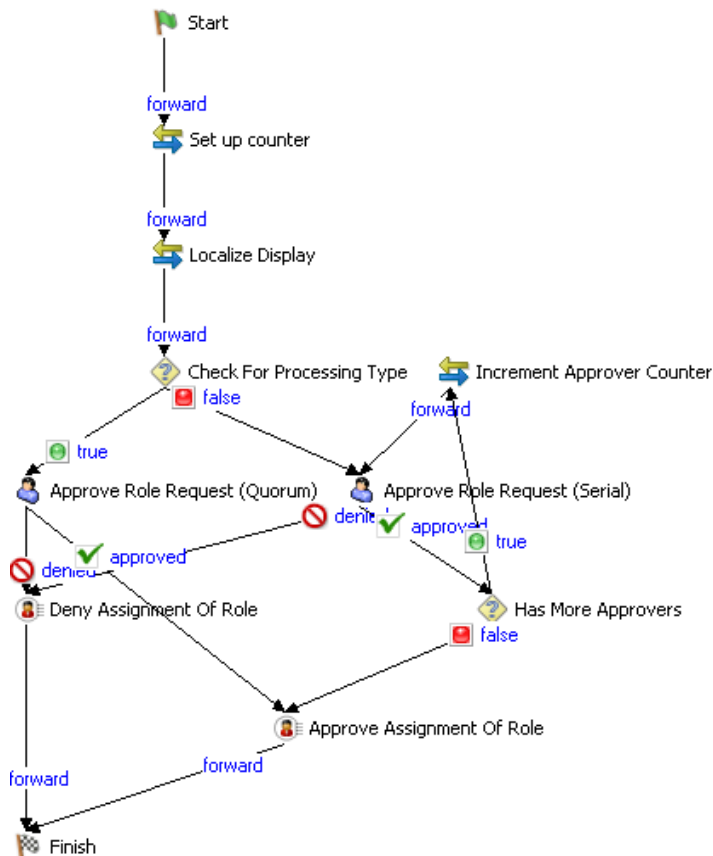Figure 6-11 Default Resource Approval Workflow



The components of this workflow, and their responsibilities are summarized in [Table 6-13](#).

Table 6-13 *Standard Resource Approval Activities*

Activity Name	Activity Type	Description
Start	Start	Logical starting point for all workflows. For resource approvals it must instantiate the <code>nrfResourceRequest</code> object.
Set up counter	Mapping	Sets up the counter for the number of approvers in case the mode is Serial.
Localize Display	Mapping	Sets up the display labels for each of the associated display names for the user's locale.
Check for Processing Type	Condition	Determines whether the approval is a quorum condition by setting the Condition property to this ECMA expression: <pre>nrfResourceRequest.isQuorumProcess()</pre> <p>If the quorum condition exists, control proceeds to the Approve Resource Request (Quorum). If the quorum condition does not exist, control proceeds to the Approve Resource Request (Serial).</p>
Approve Resource Request (Quorum)	Approval	This is where the decision to approve or deny the request is recorded as part of the workflow instance. The quorum condition required to make the process successful is retrieved from the <code>nrfQuorum</code> attribute of the <code>nrfResourceRequest</code> object.
Approve Resource Request (Serial)	Approval	This is where the decision to approve or deny the request is recorded as part of the data flow associated with the workflow instance. <p>The workflow loops through the list of approvers found in the <code>nrfResourceRequest</code> object. The request is approved if all approvers in the serial process approve the request. The request is denied upon the first rejection from an approver in the serial process</p>
Deny Assignment of Resource	Resource Request Binding	Changes the deny attribute in the <code>nrfResourceRequest</code> object to true.
Approve Assignment of Role	Resource Request Binding	Changes the approve attribute in the <code>nrfResourceRequest</code> object to true.
Finish	Finish	Logical end point of all workflows.

To use the standard Resource Approval workflow in your user application, you must specify your own users as Trustees. For information on setting the Trustees property, see [Section 4.2.6, "Modifying Settings of a Provisioning Request Definition,"](#) on page 96.

6.7.2 Writing Custom Resource Workflows

If the standard resource approval workflow does not support your business needs, and cannot be customized to do so, you can write your own. At a minimum, a custom resource approval workflow must:

- ◆ Contain two Resource Request Binding activities


One Resource Request Binding activity must be set to approved and the other set to denied. You must link each of the Resource Request Binding activities to the Finish activity. If the workflow does not meet this requirement, it is invalid, and Designer prevents you from deploying it. The Role and Resource Service driver needs these values to set the status for the workflow and to then apply the logic to associate the resource to the identity.

- ◆ Contain the following control in the request form:
 - ◆ Form Field Name: nrfResourceRequestDN
 - ◆ Data Type: Resource Request
 - ◆ Control Type: Text
- ◆ Instantiate the nrfResourceRequestDN in the Pre Activity Data Item Mapping.
- ◆ Contain the following in the Post Activity Data Item Mapping:
 - ◆ Source Form Field: nrfResourceRequestDN
 - ◆ Target Expression: flowdata.nrfResourceRequestDN
 - ◆ Data Type: dn
- ◆ Not contain the following ECMA expressions in the Data Item Mapping or Properties definitions because they might return null:
 - ◆ `getApprovalDN()`
 - ◆ `getAllApproversDN()`
 - ◆ `getAllSodApproversDN()`

Because Designer and the User Application user interface do not allow entry of approvers for custom resource approval workflows, you must specify the approvers in the workflow itself. Therefore, if you create a custom workflow based on a copy of the Resource Approval provisioning request definition, you must remove the ECMA methods from Data Item Mapping or Properties definitions.

In the following example, a user requests a resource and the user's manager approves it.

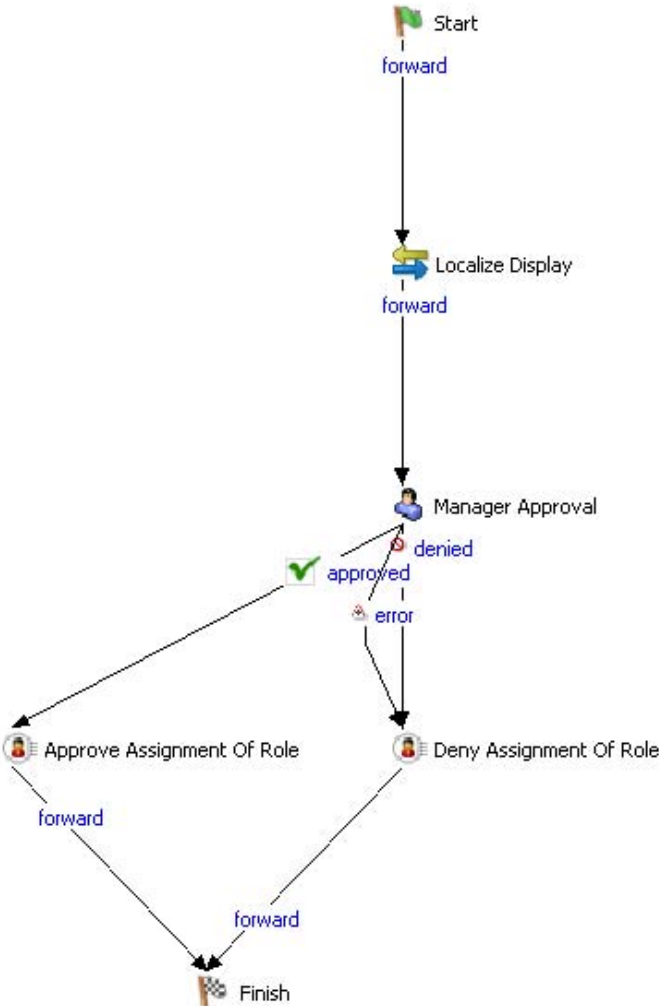Figure 6-12 Sample Custom Resource Approval Workflow



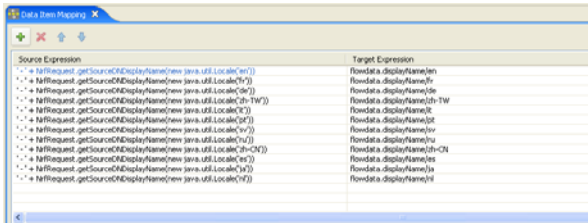
The components of this workflow, and their responsibilities are summarized in [Table 6-14](#).

Table 6-14 Sample Custom Workflow Components

Activity Name	Activity Type	Description
Start	Start	Logical starting point of all workflows.
Localize Display	Mapping	Sets up the display labels for the user's locale.
Manager Approval	Approval	This is where the decision to approve or deny the request is recorded as part of the workflow instance. The resource request approval is needed only by the requestor's manager.
Approve Assignment of Role	Role Binding	Changes the approve attribute in the nrfResourceRequest object to true.
Deny Assignment of Role	Role binding	Changes the deny attribute in the nrfResourceRequest object to true.
Finish	Finish	Logical end point of all workflows.

The data item mapping for the sample custom resource approval workflow is defined in [Table 6-15](#)

Table 6-15 Sample Custom Resource Approval Workflow Data Item Mapping

Activity Name	Property Type	Property Value																																						
Start	Data Item Pre Activity	Source Expression: None Target Form Field: nrfResourceRequestDN Data Type: dn																																						
	Data Item Post Activity	Source Form Field: nrfResourceRequestDN Target Expression: flowdata.nrfResourceRequest/DN Data Type: DN																																						
Localize Display	Data Item Source and Target mapping																																							
Manager Approval	Addressee Property	Addressee IDVault.get(recipient, 'user', 'manager')																																						
	Data Item Pre Activity	<input checked="" type="radio"/> Pre Activity <input type="radio"/> Post Activity <table border="1"> <thead> <tr> <th>Source Expression</th> <th>Target Form Field</th> <th>Data Type</th> </tr> </thead> <tbody> <tr><td></td><td>title</td><td>string</td></tr> <tr><td></td><td>subheading</td><td>string</td></tr> <tr><td>nrfRequest.getCn()</td><td>RequestNumber</td><td>dn</td></tr> <tr><td>nrfRequest.getRequester()</td><td>RequesterName</td><td>dn</td></tr> <tr><td>nrfRequest.getCategory_LocalString(locale)</td><td>Operation</td><td>string</td></tr> <tr><td>nrfRequest.getSourceDN_DisplayName(locale)</td><td>SourceDN</td><td>string</td></tr> <tr><td>nrfRequest.getTargetDN_DisplayName(locale)</td><td>TargetDN</td><td>string</td></tr> <tr><td>nrfRequest.getRequestDate()</td><td>RequestDate</td><td>date</td></tr> <tr><td>nrfRequest.getStartDate()</td><td>StartDate</td><td>date</td></tr> <tr><td>nrfRequest.getEndDate()</td><td>EndDate</td><td>date</td></tr> <tr><td>nrfRequest.getDescription()</td><td>Description</td><td>string</td></tr> <tr><td>nrfRequest.getStatus_LocalString(locale)</td><td>CurrentStatus</td><td>string</td></tr> </tbody> </table>	Source Expression	Target Form Field	Data Type		title	string		subheading	string	nrfRequest.getCn()	RequestNumber	dn	nrfRequest.getRequester()	RequesterName	dn	nrfRequest.getCategory_LocalString(locale)	Operation	string	nrfRequest.getSourceDN_DisplayName(locale)	SourceDN	string	nrfRequest.getTargetDN_DisplayName(locale)	TargetDN	string	nrfRequest.getRequestDate()	RequestDate	date	nrfRequest.getStartDate()	StartDate	date	nrfRequest.getEndDate()	EndDate	date	nrfRequest.getDescription()	Description	string	nrfRequest.getStatus_LocalString(locale)	CurrentStatus
Source Expression	Target Form Field	Data Type																																						
	title	string																																						
	subheading	string																																						
nrfRequest.getCn()	RequestNumber	dn																																						
nrfRequest.getRequester()	RequesterName	dn																																						
nrfRequest.getCategory_LocalString(locale)	Operation	string																																						
nrfRequest.getSourceDN_DisplayName(locale)	SourceDN	string																																						
nrfRequest.getTargetDN_DisplayName(locale)	TargetDN	string																																						
nrfRequest.getRequestDate()	RequestDate	date																																						
nrfRequest.getStartDate()	StartDate	date																																						
nrfRequest.getEndDate()	EndDate	date																																						
nrfRequest.getDescription()	Description	string																																						
nrfRequest.getStatus_LocalString(locale)	CurrentStatus	string																																						
	Data Item Post Activity	None																																						

Activity Name	Property Type	Property Value
Approve Assignment of Resource	Action Property	approved
Deny Assignment of Resource	Action Property	denied
Finish		None

6.8 Debugging a Workflow

When testing a workflow, you might need to see the values of the variables you're using in the flow. Some options include:

- ♦ [Section 6.8.1, "Using the Log Activity," on page 207](#)
- ♦ [Section 6.8.2, "Using the Workflow Database," on page 207](#)
- ♦ [Section 6.8.3, "Changing Log Levels," on page 207](#)

6.8.1 Using the Log Activity

Use the Log activity to display messages containing the variables you need to look at. After you've configured the Log activity, you can then see the messages in the console. In the Log activity, you can use scripting expressions in the Message property to retrieve the values you need. For example, you might use this expression to log a message containing the value of a variable defined on the flowdata object:

```
flowdata.get('my_variable')
```

For details on using the Log activity, see [Section 7.3, "Log Activity," on page 233](#).

6.8.2 Using the Workflow Database

Look in the workflow database to see how the data associated with the flowdata object changes as the workflow progresses from one activity to the next. To see this data, you can look at the `afdocument` table.

6.8.3 Changing Log Levels

During the debugging process, you can change the log levels associated with the workflow system (`com.novell.soa.af.impl`), the provisioning requests component of the User Application (`com.novell.srvprv.apwa`), and the evaluation of server side scripts (`com.novell.soa.script`). This approach might generate more information than you need, but sometimes it can be helpful. To change logging levels, go to the Logging page within the *Administration* tab of the User Application.

6.9 Provisioning Multiple Individuals with One Workflow Instance

You can configure a provisioning request definition so that one individual (for example, a manager) can provision multiple individuals (for example, members of a , or a group) with one workflow. The provisioning request definition can be configured to provision any one of the following:

- ♦ Multiple individual users from the default user container
- ♦ All members of a group from the default group container (for example, Sales, Marketing, HR, IT)
- ♦ All members of any arbitrary Identity Vault container

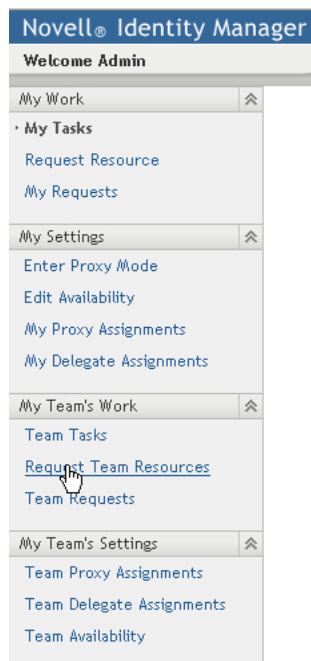
To create this type of workflow, create the provisioning request definition as you normally would. On the Overview panel, select *Single Flow Provision Members* from the *Flow Strategy* list.

- ♦ [Section 6.9.1, “Basic Steps for Using the Workflow,” on page 208](#)
- ♦ [Section 6.9.2, “Setting up the Workflow for a Manager to Use,” on page 209](#)

6.9.1 Basic Steps for Using the Workflow


This section describes the basic steps for using a workflow that utilizes the *Single Flow Provision Members* flow strategy.

- 1 Log in to the user application as a user application administrator.
- 2 Click *Requests and Approvals*.
- 3 Click *Request Resources*.



- 4 Select the provisioning category to which the provisioning request belongs, then click *OK*.

You should see a workflow that is marked with an icon that contains a cluster of people:

Resource	Resource Search Criteria	Description
 Strategy_SingleFlowProvisionMembers	Accounts	Strategy_SingleFlowProvisionMembers

5 Click the name of the workflow.

A form is displayed that provides three methods of selecting multiple users to provision:

- ◆ Specify one or more recipients
- ◆ Specify a group
- ◆ Specify a container

6 Specify the recipients, then click *Continue*.

6.9.2 Setting up the Workflow for a Manager to Use

To enable a Manager to use a workflow that uses the *Single Flow Provision Members* flow strategy, you need to perform these additional setup steps:

- 1 Log in to iManager as an administrator.
- 2 In *Roles and Tasks*, select *Provisioning Configuration*.
- 3 Select *Provisioning s*.

- 4 Set up the if it is not already set up.
- 5 Bind the workflow to the by defining a *Provisioning Request* using the *Provisioning Configuration* Role and Task.

6.10 Making Distinguished Name References Portable

When you use a DN in an expression in a provisioning request definition, the expression might fail if you deploy the provisioning request definition to an Identity Vault with a different structure. You typically specify DNs in:

- ♦ Overview panel: Trustee specification.
- ♦ User activity: Addressee and escalation addressee.
- ♦ Entity activity: Entitlement reference and entity DN.
- ♦ Many other expressions, for example, `IDVault.get(dn, class, attribute)`.

Some expressions, such as `recipient`, are portable. The following expressions, which are used by default in the User activity, are also portable:

```
IDVault.get(recipient, 'user', 'manager')
```

```
IDVault.get(approval_A.getAddressee(), 'user', 'manager')
```

To ensure that your DN expressions are portable across Identity Vaults, you can use one of the following variables:

- ♦ `ROOT_CONTAINER`: for example `ou=idm-prov,o=novell`
- ♦ `PROVISIONING_DRIVER`: for example `cn=UserApplication,cn=TestDrivers,o=novell`
- ♦ `USER_CONTAINER`: for example `ou=users,ou=idm-prov,o=novell`
- ♦ `GROUP_CONTAINER`: for example `ou=groups,ou=idm-prov,o=novell`

These variables are defined during installation of the user application and are resolved at runtime by the ECMAScript engine. You can find them in the ECMA Expression Builder under the process node. Suppose you wanted to reference an entitlement at the following DN:

```
'cn=myEntitlement,cn=UserApplication,cn=TestDrivers,o=novell'
```

You could use the following expression to make the DN portable to any identity vault:

```
'cn=MyEntitlement,' + PROVISIONING_DRIVER
```

You can use this technique for users and groups also.

NOTE: Trustees are not expressions so you cannot use this technique with Trustees.

6.11 Configuring Digital Signature Support

This section describes how to use Designer to configure provisioning request definitions to support digital signatures.

NOTE: To support digital signatures with a provisioning request definition, your administrator must also configure the User Application environment to support digital signatures. For details, see [“Digital Signature Configuration”](#).

To configure a provisioning request definition to support digital signatures, follow the steps outlined in the following table.

Table 6-16 Steps for Specifying Digital Signature Support in Workflows

Step	Task	Description
1	Create one or more digital signature declarations.	See Section 6.11.2, “Creating a Signature Declaration,” on page 212.
2	Specify whether a digital signature is required to initiate a provisioning request.	In the Workflow panel, click the Start activity and set the following properties: <ul style="list-style-type: none"> ♦ Digital Signature Required: See Section 6.11.1, “Digital Signature Workflow Properties,” on page 211. ♦ Signature Declaration: Choose a signature declaration from the drop-down list. The list is only populated if you completed Step 1 (above).
3	Specify whether a digital signature is required for each approval step within the workflow.	Each approval step can have more than one outgoing link. You must specify the <i>Digital Signature Required</i> property and the <i>Signature Declaration</i> properties for each approval step and each outgoing flow path. For a description of the property settings, see Section 6.11.1, “Digital Signature Workflow Properties,” on page 211.
4	Determine the forms that contain a title control.	Title controls have a property called <i>Display title in signed form document</i> . Determine for your application and use of digital signatures whether this property should be set to true or false. For more information on this property, see Section 5.5.23, “Title,” on page 160.

- ♦ [Section 6.11.1, “Digital Signature Workflow Properties,”](#) on page 211
- ♦ [Section 6.11.2, “Creating a Signature Declaration,”](#) on page 212

6.11.1 Digital Signature Workflow Properties


Table 6-17 Digital Signature Settings

Setting	Description
Digital Signature Type	Specifies whether the digital signature uses data or form as its type: <ul style="list-style-type: none"> ♦ Data: Specifies that the XML signature serves as the user agreement. When you select <i>Data</i>, the XML data is written to the audit log. ♦ Form: Specifies to generate a PDF document that includes the digital signature declaration. This document serves as the user agreement. The user can preview the generated PDF document before submitting a request or approval. When you select <i>Form</i>, the PDF document (encapsulated in XML) is written to the audit log.

Setting	Description
Digital Signature Declaration	Specifies a digital signature confirmation string that certifies the user's signature. See Section 6.11.2, "Creating a Signature Declaration," on page 212.

6.11.2 Creating a Signature Declaration

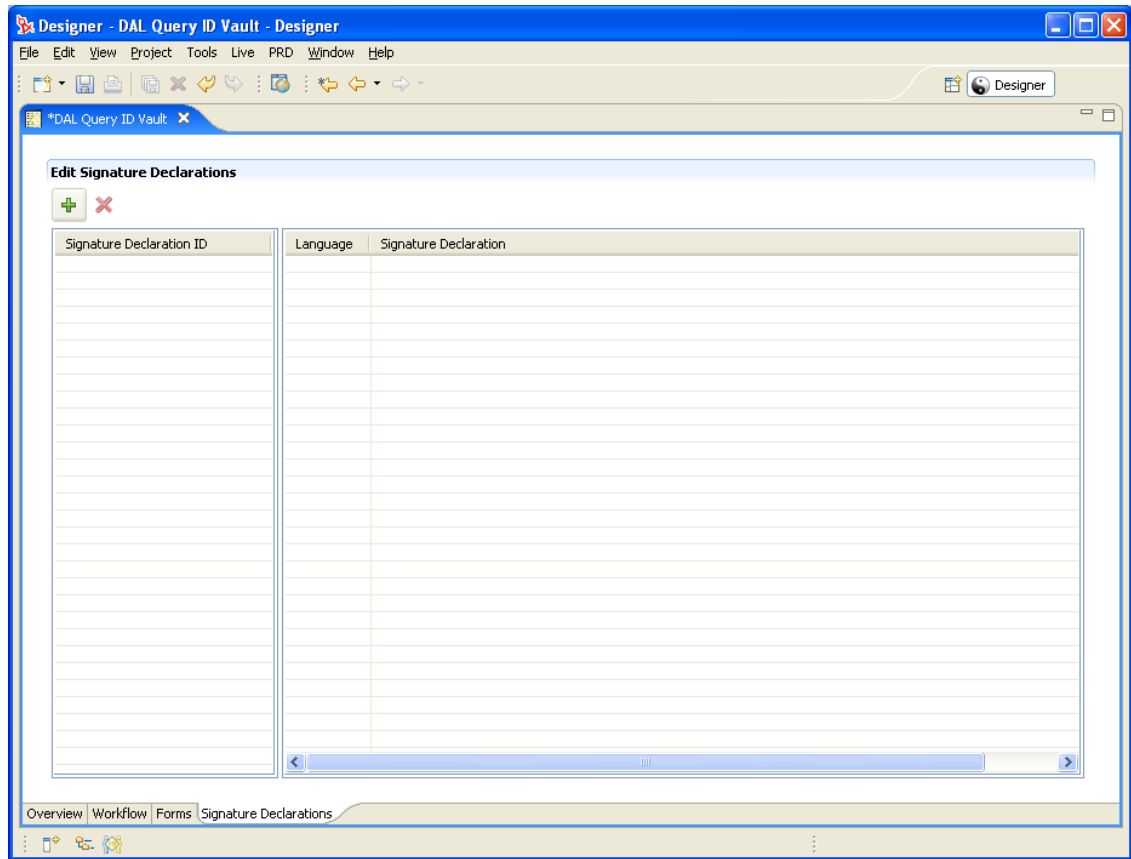- 1 Open the *Signature Declarations* tab.



- 2 Click to add a row, then fill in the fields as follows:

Field	Description
Signature Declaration ID	A unique identifier for the signature declaration. This ID is displayed in the drop-down for the "Digital Signature Declaration" on page 212.
Language	Choose a language and specify the signature declaration translation for that language. The signature declaration string is also exported as part of the Provisioning view's <i>Export > Export Localization to File</i> so that you can send the declaration to be localized as part of the rest of the User Application display labels and strings.
Signature Declaration	The string to display in a form as the signature declaration.

- 3 Click *Save*.

7 Workflow Activity Reference

This section provides details on configuring the different types of workflow activities. Topics in this section include:

- ◆ [Section 7.1, “Start Activity,” on page 214](#)
- ◆ [Section 7.2, “Approval Activity,” on page 216](#)
- ◆ [Section 7.3, “Log Activity,” on page 233](#)
- ◆ [Section 7.4, “Branch Activity,” on page 234](#)
- ◆ [Section 7.5, “Merge Activity,” on page 235](#)
- ◆ [Section 7.6, “Condition Activity,” on page 236](#)
- ◆ [Section 7.7, “Mapping Activity,” on page 237](#)
- ◆ [Section 7.8, “Workflow Status,” on page 238](#)
- ◆ [Section 7.9, “E-Mail Activity,” on page 239](#)
- ◆ [Section 7.10, “Role Request Binding Activity,” on page 241](#)
- ◆ [Section 7.11, “Role Request Activity,” on page 241](#)
- ◆ [Section 7.12, “Resource Request Binding Activity,” on page 246](#)
- ◆ [Section 7.13, “Resource Request Activity,” on page 247](#)
- ◆ [Section 7.14, “Start Workflow Activity,” on page 250](#)
- ◆ [Section 7.15, “Finish Activity,” on page 251](#)
- ◆ [Section 7.16, “Rest Activity,” on page 254](#)
- ◆ [Section 7.17, “Integration Activity,” on page 258](#)
- ◆ [Section 7.18, “Entitlement Activity,” on page 260](#)
- ◆ [Section 7.19, “Entity Activity,” on page 262](#)

The display names for all activities can be localized by clicking the *Localize Strings* button (see [Section 2.10, “Localizing Provisioning Objects,” on page 35](#)) for the activity name property. Activity display names are also exported as part of the Provisioning view’s *Export > Export Localization to File* (see [Section 2.10.3, “Exporting and Importing Data to Localize,” on page 37](#)) so that you can send the activity names to be localized as part of the rest of the User Application display labels and strings.

7.1 Start Activity

The Start activity is the first activity to execute in a workflow. It begins execution when the user makes a request to provision a resource. After the user makes the request, the Start activity displays the initial request form to the user. On the initial request form, the user can be asked to specify a comment that indicates the reason for the request.

You can customize the initial request form to suit your application requirements. For details on customizing forms, see [Chapter 5, “Creating Forms for a Provisioning Request Definition,” on page 107](#).

Before displaying the form to the user, the Start activity performs any pre-activity data mappings specified for the activity.

After the user submits the form, the Start activity performs any post-activity data mappings specified for the activity. These mappings typically include copying data from form fields into the flowdata object.

- ◆ [Section 7.1.1, “Properties,” on page 214](#)
- ◆ [Section 7.1.2, “Data Item Mapping,” on page 215](#)
- ◆ [Section 7.1.3, “E-Mail Notification,” on page 216](#)


7.1.1 Properties


The Start activity has the following properties:


Table 7-1 Start Activity Properties

Property Name	Description
<i>Name</i>	Provides a name for the activity.

Property Name	Description
<i>Display Name Override</i>	Allows you to override the provisioning request definition's display name. This is the name that displays in the <i>Resource</i> column when the user selects <i>My Requests</i> or <i>Requests</i> . The name can be a constant or the result of an ECMA expression, and it can be localized for each supported locale. To access the dialog boxes that let you specify the constant or ECMA expression, the <i>Localize Strings</i> button in the <i>Value</i> column.

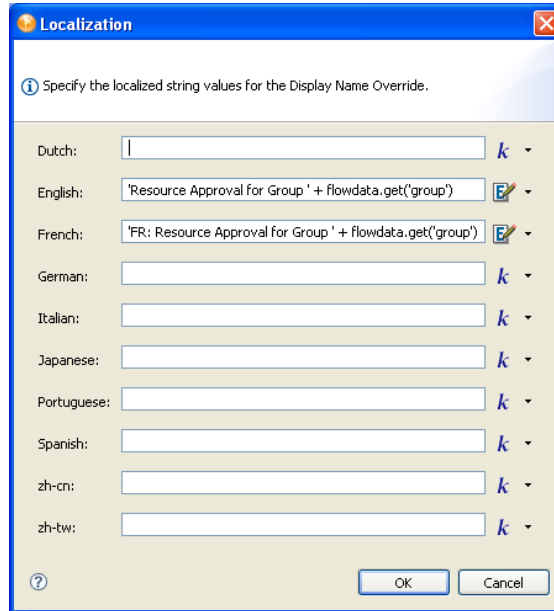

To specify a constant, click  and type the value in the field. The value is displayed exactly as entered in this field.

To specify an ECMA expression, click  and specify the expression.

TIP: If the value is an ECMA expression, any constants within the expression must be in single quotes.

If you specify both a constant and ECMA expression, the runtime displays whichever value was the last one entered as shown in the dialog box (above).

Digital Signature Type See Digital Signature Type in [Table 6-17 on page 211](#).

7.1.2 Data Item Mapping

To bind the data items associated with the Start activity, you define pre-activity and post-activity mappings. The pre-activity mappings initialize data in the request form with constants or values retrieved from the flowdata object. The post-activity mappings move form data back into the flowdata object.

Table 7-2 Start Activity Data Item Mappings

Setting	Description
Pre-Activity	<p>Allows you to specify one or more pre-activity mappings. When this option is selected, you can double-click a cell in the <i>Source Expression</i> column to specify where the initial request form gets data for a particular target form field.</p> <p>The Pre-activity Mapping expression is evaluated twice before the form is presented, once during the initial presentation to the form and then again prior to the post to ensure that all the values on the form have a valid type, even those that were not initialized. Because of this behavior, any calls made to external systems are made twice. For example, a call that retrieves a unique counter for a value makes two calls that allocates two counters with the last one requested being used.</p> <p>NOTE: When the <i>Pre-Activity</i> option is selected, the cells in the <i>Target Form Field</i> column are not editable.</p>
Post-Activity	<p>Allows you to specify one or more post-activity mappings. When this radio button is selected, you can double-click a cell in the <i>Target Expression</i> column to specify where data from a form field should be copied after the form has been processed.</p> <p>The DNDisplay control is not available for post activity mappings.</p> <p>NOTE: When the <i>Post-Activity</i> option is selected, the cells in the <i>Source Form Field</i> column are not editable.</p>
Source Expression	<p>Specifies a source expression for a pre-activity mapping. When you click a cell in the <i>Source Expression</i> column, the ECMA Expression Builder displays to help you define your expression.</p>
Target Expression	<p>Specifies a target expression for a post-activity mapping. When you click a cell in the <i>Target Expression</i> column, the ECMA Expression Builder displays to help you define your expression.</p>

For details on building ECMA expressions, see [Chapter 9, “Working with ECMA Expressions,”](#) on page 315.

7.1.3 E-Mail Notification

Not supported with this activity.

7.2 Approval Activity

The Approval activity is a user-facing activity that displays an approval form to the user. On the approval form, the user can approve, deny, or refuse a provisioning request. The Approval activity can have multiple outgoing flow paths, but only one of the paths is executed at runtime.

You can customize the approval form to suit your application requirements. For details on customizing forms, see [Chapter 5, “Creating Forms for a Provisioning Request Definition,”](#) on page 107.

Before displaying the form to the user, the Approval activity performs any pre-activity data mappings specified for the activity.

After the user submits the form, the Approval activity performs any post-activity mappings specified for the activity. These mappings typically include copying data from form fields into the flowdata object.

- ♦ [Section 7.2.1, “Properties,” on page 217](#)
- ♦ [Section 7.2.2, “Data Item Mapping,” on page 223](#)
- ♦ [Section 7.2.3, “Available ECMAScript Methods,” on page 224](#)
- ♦ [Section 7.2.4, “E-Mail Notification,” on page 224](#)
- ♦ [Section 7.2.5, “Addressing an Approval Activity,” on page 226](#)

7.2.1 Properties

The Approval activity has the following properties:

Table 7-3 Approval Activity Properties

Property Name	Description
<i>Name</i>	Provides a name for the activity.
<i>Addressee</i>	<p>Specifies a dynamic expression that identifies the addressee for the activity. The addressee is the approver of the workflow.</p> <p>The addressee is determined at runtime, based on evaluation of the expression. Designer validates that the expression is a valid ECMA expression. It cannot validate whether the expression resolves to a valid object (such as a role) or whether that object will exist at runtime.</p> <p>For information on specifying addressees (such as specifying a role as the approver), see “Specifying the Addressee Property” on page 226.</p> <p>For more information about developing valid Addressee expressions, and about how Addressee interacts with the Approver Type property, see Section 7.2.5, “Addressing an Approval Activity,” on page 226.</p> <p>TIP: To simplify the process of testing a new workflow, you can set the addressee to be the recipient. This removes the need to log out of the User Application and log in again as a manager each time you want to test your forms. This technique is particularly useful when the workflow involves multiple levels of approval. After the testing phase is complete, you can change the addressee to the correct value.</p> <p>For details on building ECMA expressions, see Chapter 9, “Working with ECMA Expressions,” on page 315. For descriptions of the system variables available in a workflow, see Section 6.5.3, “Understanding Workflow Data,” on page 187.</p>

Property Name	Description
<i>Reminder Start</i>	<p data-bbox="688 218 1443 390">Specifies a dynamic expression that defines, in milliseconds, the time at which the first reminder e-mail should be sent. The start value is an offset from the time of the first assignment associated with the activity. You can pick predefined expressions that represent common intervals (for example, hour, day, week) in the <i>ECMAScript Objects</i> pane of the ECMA Expression Builder.</p> <p data-bbox="688 417 1443 646">This is part of the reminder e-mail function. If this activity is considered important and needs to be acted on quickly, you can configure the activity to send a reminder e-mail to the activity addressee. For example, you can set the reminder settings to send a reminder e-mail 5 days before the activity times out, and on a daily basis until the activity times out. To do this, specify a <i>Reminder Start</i> time, a <i>Reminder Interval</i>, and the e-mail to be sent (see Section 7.2.4, “E-Mail Notification,” on page 224).</p> <p data-bbox="688 674 1443 783">For details on building ECMA expressions, see Chapter 9, “Working with ECMA Expressions,” on page 315. For descriptions of the system variables available in a workflow, see Section 6.5.3, “Understanding Workflow Data,” on page 187.</p>
<i>Reminder Interval</i>	<p data-bbox="688 810 1443 919">Specifies a dynamic expression that defines the interval between which reminder e-mails are sent. You can pick predefined expressions that represent common intervals (for example, hour, day, week) in the <i>ECMAScript Objects</i> pane of the ECMA Expression Builder.</p>
<i>Escalation Addressee</i>	<p data-bbox="688 947 1317 974">Not available when the approver type is <i>Multiple</i> or <i>Quorum</i></p> <p data-bbox="688 1001 1443 1050">Specifies a dynamic expression that identifies the user who should get this task if the timeout limit has been reached.</p> <p data-bbox="688 1077 1443 1125">The escalation addressee is determined at runtime, based on how the expression is evaluated.</p> <p data-bbox="688 1152 1443 1274">For details on building ECMA expressions, see Chapter 9, “Working with ECMA Expressions,” on page 315. For descriptions of the system variables available in a workflow, see Section 6.5.3, “Understanding Workflow Data,” on page 187.</p>


Property Name	Description
<i>Escalation Count</i>	<p>Not available when the approver type is <i>Multiple</i> or <i>Quorum</i>.</p> <p>Specifies the number of times to retry the activity in the event of a timeout.</p> <p>When an activity times out, the workflow process can try to complete the activity again, depending on the escalation count specified for the activity. With each retry, the workflow process can escalate the activity to another user. In this case, the activity is reassigned to another user (the user's manager, for example) to give this user an opportunity to finish the work of the activity. If the last retry times out, the activity can be marked as approved, denied, refused, timedout, or in error, depending on the final timeout action specified for the activity.</p> <p>The <i>Timeout</i> interval (see <i>Timeout</i> in this table) takes precedence over the <i>Escalation Interval</i>. For example, if you set the timeout to 10 minutes, and specify an <i>Escalation Count</i> of 3 and <i>Escalation Interval</i> of 5 minutes, the activity finishes after 10 minutes without attempting all of the retries. In this example, the second retry would be canceled, and the workflow would finish processing for the activity. At the conclusion of the activity, the workflow engine would follow the link defined by the final timeout action.</p>
<i>Escalation Interval</i>	<p>Not available when the approver type is <i>Multiple</i> or <i>Quorum</i>.</p> <p>Specifies a dynamic expression that defines the period of time allotted for the addressee to complete the task. The escalation interval applies each time the activity is executed by the addressee.</p> <p>The <i>Timeout</i> interval (see <i>Timeout</i> in this table) takes precedence over the <i>Escalation Interval</i>. For example, if you set the timeout to 10 minutes, and specify an <i>Escalation Count</i> of 3 and <i>Escalation Interval</i> of 5 minutes, the activity will finish after 10 minutes without attempting all of the retries. In this example, the second retry would be canceled, and the workflow would finish processing for the activity. At the conclusion of the activity, the workflow engine would follow the link defined by the final timeout action.</p> <p>For details on building ECMA expressions, see Chapter 9, "Working with ECMA Expressions," on page 315. For descriptions of the system variables available in a workflow, see Section 6.5.3, "Understanding Workflow Data," on page 187.</p>
<i>Escalation Reminder Start</i>	<p>Not available when the approver type is <i>Multiple</i> or <i>Quorum</i>.</p> <p>Specifies a dynamic expression that defines the time at which the first reminder e-mail (see <i>Reminder Start</i> in this table) should be sent to the <i>Escalation Addressee</i>. The start value is an offset from the time of the escalation assignment. You can pick predefined expressions that represent common intervals (for example, hour, day, week) in the <i>ECMAScript Objects</i> pane of the ECMA Expression Builder.</p>
<i>Escalation Reminder Interval</i>	<p>Not available when the approver type is <i>Multiple</i> or <i>Quorum</i>.</p> <p>Specifies a dynamic expression that defines how often messages are sent to the <i>Escalation Addressee</i> after the first escalation reminder is sent. You can pick predefined expressions that represent common intervals (for example, hour, day, week) in the <i>ECMAScript Objects</i> pane of the ECMA Expression Builder.</p>

Property Name	Description
<i>Final Timeout Action</i>	<p>Determines the final state of the request in the event that the workflow times out. The choices are</p> <ul style="list-style-type: none"> ◆ approved ◆ denied ◆ refused ◆ timedout ◆ error
<i>Timeout</i>	<p>Specifies a dynamic expression that defines the period of time allotted for the addressee to complete the task. The timeout interval applies each time the activity is executed by the addressee.</p> <p>The Timeout setting takes precedence over the <i>Escalation Count</i> and <i>Escalation Interval</i> values. If the <i>Timeout</i> setting for the activity is reached before one or more of the escalation attempts have been tried, the activity finishes processing without executing these escalation attempts. For example, if you set the timeout to 10 minutes, and specify an <i>Escalation Count</i> of 3 and <i>Escalation Interval</i> of 5 minutes, the activity finishes after 10 minutes without attempting all of the escalation attempts. In this example, the second escalation attempt would be canceled, and the workflow would finish processing for the activity. At the conclusion of the activity, the workflow engine would follow the link defined by the final timeout action.</p> <p>For details on building ECMA expressions, see Chapter 9, “Working with ECMA Expressions,” on page 315. For descriptions of the system variables available in a workflow, see Section 6.5.3, “Understanding Workflow Data,” on page 187.</p>
<i>Timeout Units</i>	<p>Determines the unit of measure used for the timeout interval. The choices are</p> <ul style="list-style-type: none"> ◆ Milliseconds ◆ Days ◆ Hours ◆ Minutes ◆ Seconds

Property Name**Description**

Form

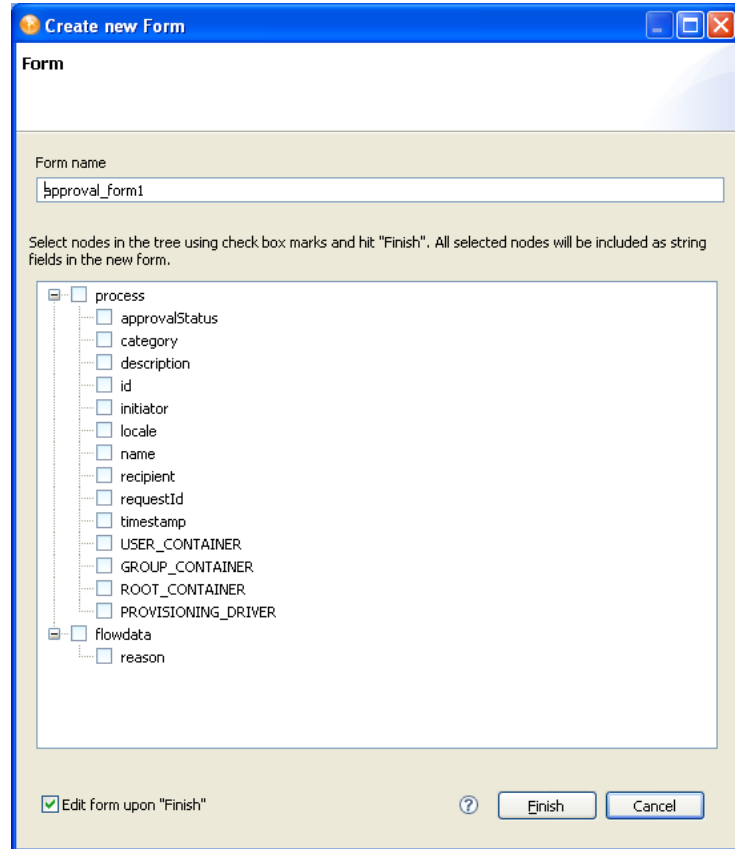Specifies the name of the approval form to display at runtime, or lets you define a new form. Select the name of the form you want to use or *create new form*. When you choose to create a new form, the Create New Form Wizard launches and looks similar to this.



Select the data items to include in the form from the data items listed, then click Finish. The Approval Form Wizard generates each of the selected data items as a String type field in the new form.

An Approval activity must have a form associated with it. If no form is specified, an error message is displayed at runtime.

Exclude Requestor

Specifies whether requestors can approve their own provisioning requests.

- ◆ *True*: The requestor is not allowed to approve their own provisioning requests.
- ◆ *False*: The requestor is allowed to approve their own provisioning requests.

Property Name	Description
<i>Approver Type</i>	<p>Specifies the number of addresses that are allowed and the approval pattern that is enforced for this activity. The choices are</p> <ul style="list-style-type: none"> ◆ Normal: Action by the addressee is required to complete the approval. ◆ Group: Action by one addressee in the group is required to complete the approval. ◆ Multiple: Action by all of the addressees is required to complete the approval. You cannot use post activity data item mapping with the <i>Multiple Approver Type</i>. ◆ Quorum: Action by a percentage of addressees or an absolute number of addressees (see <i>Quorum</i> property in this table) is required to complete the approval. You cannot use post-activity data item mapping with the <i>Quorum Approver Type</i>. <p>For information about how the <i>Approver Type</i> property interacts with the <i>Addressee</i> property, see Section 7.2.5, "Addressing an Approval Activity," on page 226.</p>
<i>Notify by E-Mail</i>	<p>Specifies whether this activity should send e-mail notifications. Set to True to notify by e-mail; otherwise, set to False.</p> <p>You specify the e-mail to send using the E-Mail Notification tab (see Section 7.2.4, "E-Mail Notification," on page 224).</p> <p>To use this feature, the <i>Notify participants by E-Mail</i> parameter for the provisioning request definition must be set to True (see Table 4-3, "Overview Properties," on page 97).</p>
<i>Quorum</i>	<p>Not available when the approver type is Normal, Group, or Multiple.</p> <p>Allows you to specify a constant value or to create an ECMA expression that specifies a percentage (for example, '75%') of approvals that is required before a quorum is achieved, or an absolute number (for example, '3') of approvals that are required before a quorum is achieved.</p>
<i>Digital Signature Type</i>	<p>See Digital Signature Type in Table 6-17 on page 211.</p>
<i>Priority</i>	<p>Specifies a dynamic expression that defines the priority of the approval activity. Valid priority values are 1, 2, or 3. You can also define an expression to determine the priority from workflow data. For example, <code>flowdata.get("Priority")</code>.</p> <p>In the User Application, users can sort the list of tasks by the priority values of the tasks.</p>

NOTE: To enable delegation to a group DN, you can have an approver type of Group or Normal, but the Addressee value must be an expression that returns the user DNs for each member of that group. For example, `IDVault.get(groupdn, 'sales', 'members')`

7.2.2 Data Item Mapping

To bind the data items associated with the Approval activity, you define pre-activity and post-activity mappings. The pre-activity mappings initialize data in the approval form with constants, values retrieved from the flowdata object, system process variables, system activity variables, and data retrieved via expression calls to the directory abstraction layer. The post-activity mappings move form data back into the flowdata object.

Table 7-4 Approval Activity Data Item Mappings

Setting	Description
<i>Pre Activity</i>	<p>Allows you to specify one or more pre-activity mappings. When this option is selected, you can double-click a cell in the <i>Source Expression</i> column to specify where the approval form gets data for a particular target form field.</p> <p>The Pre-activity Mapping expression is evaluated twice before the form is presented, once during the initial presentation to the form and then again prior to the post to ensure that all the values on the form have a valid type, even those that were not initialized. Because of this behavior, any calls made to external systems are made twice. For example, a call that retrieves a unique counter for a value makes two calls that allocates two counters with the last one requested being used.</p> <p>NOTE: When the <i>Pre-Activity</i> choice is selected, the cells in the <i>Target Form Field</i> column are not editable.</p>
<i>Post Activity</i>	<p>Allows you to specify one or more <i>Post Activity</i> mappings. When this option is selected, you can double-click a cell in the <i>Target Expression</i> column to specify where data from a form field should be copied after the form has been processed.</p> <p>You cannot use <i>Post Activity</i> mapping with the <i>Multiple</i> and <i>Quorum</i> approver types (see Section 7.2.1, “Properties,” on page 217).</p> <p>The DNDisplay control is not available for post activity mappings.</p> <p>The form for an Approval activity includes a special internal control called <code>apwaComment</code>. This control causes user comments to be written to the workflow database. It should not have a post-activity mapping. For more information on this control, see Section 5.5.11, “DNMaker,” on page 141.</p> <p>NOTE: When the <i>Post-Activity</i> option is selected, the cells in the <i>Source Form Field</i> column are not editable.</p>
<i>Source Expression</i>	<p>Specifies a source expression for a pre-activity mapping. When you click a cell in the <i>Source Expression</i> column, the ECMA Expression Builder displays to help you define your expression.</p>
<i>Target Expression</i>	<p>Specifies a target expression for a post-activity mapping. When you click a cell in the <i>Target Expression</i> column, the ECMA Expression Builder displays to help you define your expression.</p>

For details on building ECMA expressions, see [Chapter 9, “Working with ECMA Expressions,” on page 315](#).

7.2.3 Available ECMAScript Methods

The Approval activity provides several default methods to use in ECMAScript expressions, displayed in the ECMAScript Objects pane of the ECMA Expression Builder.

Table 7-5 Available ECMAScript Methods for Approval Activities

Object	Method	Description
action	<code>Activity-name.getAction(variable-name)</code>	Returns the approval action taken by the activity. Possible options are: <ul style="list-style-type: none">◆ approved◆ denied◆ refused◆ timedout◆ error
addressee	<code>Activity-name.getAddressee(variable-name)</code>	Returns the name of the user who needs to approve or deny the requested action.
name	<code>Activity-name.getName(locale)</code>	
timestamp	<code>Activity-name.getTimestamp(variable-name)</code>	Returns the date and time of the approval action taken by the activity.
user	<code>Activity-name.getUser(variable-name)</code>	Returns the name of the owner of the work task for the activity.
workld	<code>Activity-name.getWorkld(variable-name)</code>	

7.2.4 E-Mail Notification

To enable e-mail notification for the Approval activity, you need to specify the e-mail template to use, as well as source expressions for target tokens in the e-mail body.

Table 7-6 E-mail Notification Settings for the Approval Activity

Setting	Description
<i>Notify</i>	Specifies that this e-mail notification is a notification e-mail.
<i>Reminder</i>	Specifies that this e-mail notification is a reminder e-mail.
<i>Retry Reminder</i>	Specifies that this e-mail notification is a retry reminder e-mail.
<i>Show System Tokens</i>	Displays system tokens (for example, TO, CC, BCC, REPLYTO, TO_DN, CC_DN, and BCC_DN) in the <i>Target</i> column.

Setting	Description
<i>E-Mail Template</i>	<p>Specifies the name of the e-mail template to use. By default, the Approval activity uses the Provisioning Notification template.</p> <p>You can edit an e-mail template in Designer. For more information, see “Editing an e-mail template:” on page 181.</p>
<i>Source/Target</i>	<p>Specifies the source expressions for target tokens in the e-mail body.</p> <p>The list of target tokens is determined by the selected e-mail template. You cannot add new tokens, but you can assign values to the tokens by building your own source expressions. At runtime, source expressions are evaluated to determine the value of each token.</p> <p>The available target tokens are listed below:</p> <ul style="list-style-type: none"> ◆ TO ◆ CC ◆ BCC ◆ REPLYTO ◆ TO_DN ◆ CC_DN ◆ BCC_DN ◆ recipientFullName ◆ initiatorFullName ◆ requestTitle ◆ userFirstName <p>If you use a provisioning request definition template to create your workflow, each token has a default source expression. The default expressions retrieve values from the workflow process (the process object) or from the data abstraction layer (IDVault object). You can modify these expressions to suit your application requirements.</p> <p>For details on building ECMA expressions, see Chapter 9, “Working with ECMA Expressions,” on page 315.</p>

NOTE

- ◆ E-mail notification is supported only when the *Notify participants by E-Mail* check box is selected on the *Overview* tab, and the *Notify by E-Mail* property for the Approval activity is set to True.
- ◆ When you create a workflow for use with the Resource Request portlet, and you use the “_default_” as the expression for the TO token, the addressee expression must be an IDVault expression.

- ♦ If you create an activity using any of the target tokens TO_DN, CC_DN, or BCC_DN, you must specify a user’s DN or an expression that resolves to a user’s DN as the source expression for the token.
- ♦ If you create an activity using both the target tokens TO and TO_DN, the workflow sends out duplicate notification emails to the target users.

7.2.5 Addressing an Approval Activity


To address an Approval activity, you must enter a valid expression for the *Addressee* property. The Addressee is the approver for the activity. The number of approvals that are required to approve the activity is determined by the relationship between the *Addressee* property and the *Approver Type* property as described in [“Relationship Between Addressee and Approver Type” on page 228](#). This section includes the following topics:

- ♦ [“Specifying the Addressee Property” on page 226](#)
- ♦ [“Valid Addressee Expressions” on page 228](#)
- ♦ [“Relationship Between Addressee and Approver Type” on page 228](#)
- ♦ [“Troubleshooting Invalid Addressees” on page 232](#)


Specifying the Addressee Property

To build the addressee expression:


- 1 Click the  button in the Addressee property Value column.

Name	Approval	
Addressee	IDVault.get(recipient,'user','manager')	

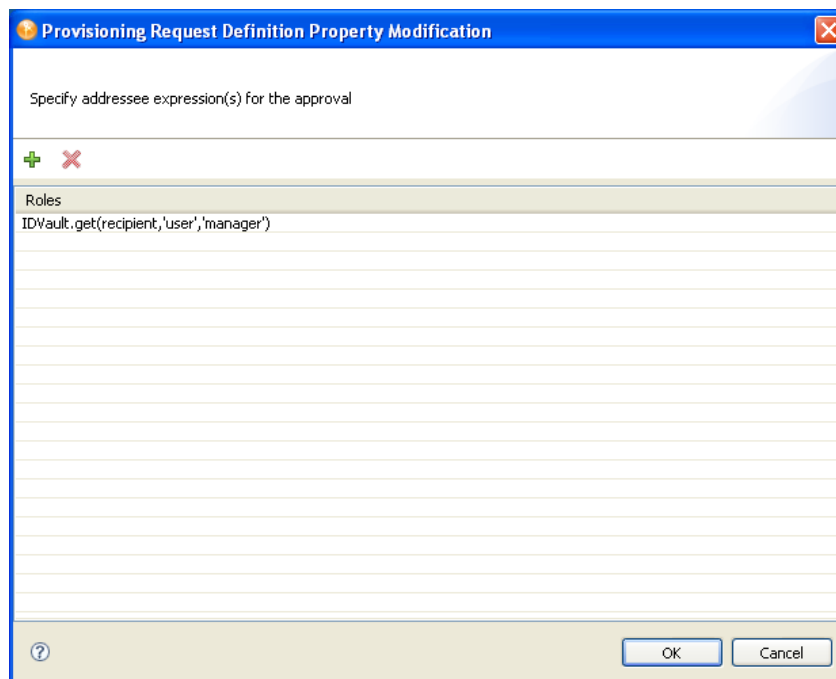Designer launches the dialog box where you can add or remove an expression. The following dialog only displays when the Approver Type is Group, Multiple, or Quorum.




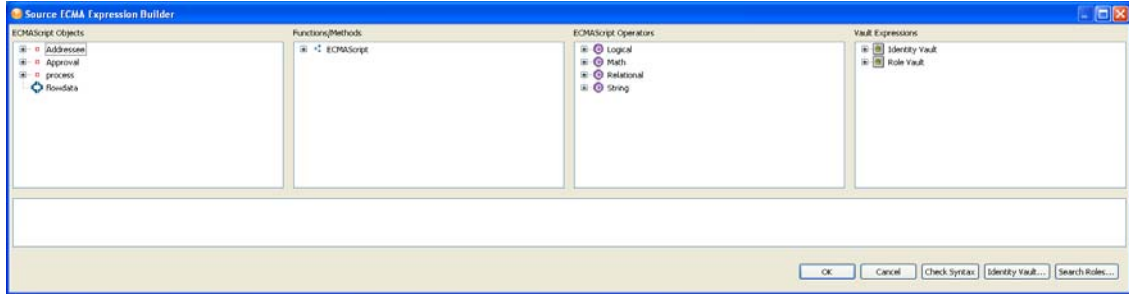- 2 Click + to add a new addressee expression by using the Expression Builder.



You can choose one of the ECMAScript Objects to build the addressee expression, or use the *Identity Vault* or *Search Roles* buttons to select a specific object. The *Search Roles* button is not available when Approver Type is Normal.

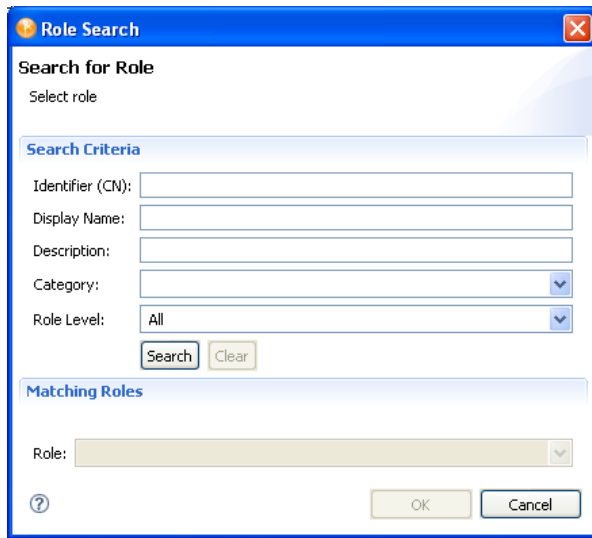- 2a To specify a Role as the Addressee, click *Search Roles*.



- 2b In the dialog box, specify the *CN*, *Display Name*, *Description*, *Role Category*, and *Role Level* on which you want to search.

For *CN*, *Display Name*, and *Description*, you can enter a wildcard (such as *S**, **S*) or regular expressions (such as *[A-Zoo-z]**).

You can enter a value for all of the fields or none of the fields. If you do not supply a value in a particular field, the search returns all of the possible values for that field. If you enter values in one or more of the fields, the values are ANDed together to create the search filter. The search occurs on the roles defined locally. Roles matching the search criteria are displayed in the *Matching Roles* selection list.

- 2c Select a role from the *Roles* selection list, then click *OK*. The role is added to the expression area.
- 3 Click *OK* after you are satisfied with expression.

Valid Addressee Expressions

An Addressee expression must resolve to one of the following at runtime:

- ♦ A valid individual addressee that can be a user DN, a group DN, or a role DN.
- ♦ A valid list of addressees (for example, created using a Java vector object) that can contain multiple User DNs, multiple group DNs, or multiple role DNs, or a mixture of both.

Because the addressee is the approver, the maximum number of approvals possible equals the number of Addressees (the number of User DNs plus the number of Group DNs or Role DNs) and does not include or count the individual members of a Group or Roles.

NOTE: A Group DN or a Role DN is always processed to contribute a single vote (that is, when one member of a group or role claims an activity, the rest of the members of the group or role can no longer see or claim the activity), regardless of the *Approver Type*.

The following table provides examples of valid addressee expressions that you can create using the ECMA Expression Builder.

Table 7-7 Examples of Addressee Expressions

Type of Expression	Example
Individual user DN	'cn=jdoe,ou=users,ou=mysample,o=myorg'
Individual group DN	'cn=Accounting,ou=groups,ou=mysample,o=myorg'
Individual role DN	'CN=Administer Drugs,CN=Level10,CN=RoleDefs,CN=RoleConfig,CN=AppConfig,' + PROVISIONING_DRIVER'
A vector of DNs (can include user, group, or role DNs)	<pre>function DNVector() { v=new java.util.Vector(); v.add('CN=jdoe,' + USER_CONTAINER); v.add('CN=Accounting,' + GROUP_CONTAINER); v.add('CN=jsmith,' + USER_CONTAINER); v.add('CN=bsmith,' + USER_CONTAINER); v.add('CN=Administer Drugs,CN=Level10,CN=RoleDefs,CN=RoleConfig,CN=AppConfig,' + PROVISIONING_DRIVER); return v; }; DNVector();</pre>

Relationship Between Addressee and Approver Type

Because the addressee is the approver, the behavior of the workflow and the total number of affirmative approvals needed varies depending on the type of Addressee that is specified by the Addressee expression, and the Approver Type that is selected.

- ♦ [“Normal Approver Type” on page 229](#)
- ♦ [“Group Approver Type” on page 230](#)
- ♦ [“Multiple Approver Type” on page 230](#)
- ♦ [“Quorum Approver Type” on page 231](#)

Normal Approver Type

The following table describes the workflow behavior when different types of addressee are used with the *Normal Approver Type*.

Table 7-8 Workflow Behavior with the Normal Approver Type

Addressee Value	Description
Individual User DN	<ul style="list-style-type: none">◆ Only the user can see the <i>Approval</i> activity in his or her task list.◆ Only one approval is needed to complete the activity as <i>Approved</i>.
Individual Group DN	<ul style="list-style-type: none">◆ Each member of Group can see the activity in the task list.◆ When one member claims the activity, it is removed from the task lists of others.◆ Only one approval is needed to complete the activity as <i>Approved</i>.
Individual Role DN	<ul style="list-style-type: none">◆ Each member of the role can see the activity in the task list.◆ When one role member claims the activity, it is removed from the task lists of others.◆ Only one approval is needed to complete the activity as <i>Approved</i>.
Multiple User DNs	Not allowed.
Multiple Group DNs	Not allowed.
Multiple Role DNs	Not allowed.
Mixture of Users, Groups, and Roles	Not allowed.

Group DNs and Proxy Processing

If a workflow is assigned to a Group and e-mail notification is used for the approvals, all members of the group are sent an e-mail. If a proxy user is assigned to any members of the group, the processing works as follows:

- ◆ If the approver is a single user then the e-mail notification is sent to both users (the original and proxy users).
- ◆ If the approver is a group DN and one of the users in the group is assigned a proxy user, the user who is the proxy is not notified by e-mail when a new request is placed in the task list.

If you want the proxy user to be notified by e-mail, assign the approval task to the members of the group and set the approver type to *Group Approver*. For example, if you assign the approval activity to:

```
IDVault.get('cn=Marketing,ou=groups,ou=idmsample,o=novell' , 'group',  
'Member')
```

When you set the approval type to Group, a notification is sent to each member's proxy, if the member has a proxy. One member of the group can claim and act on the approval task which is the same behavior as if you assigned it directly to the group DN.

Group Approver Type

The following table describes the workflow behavior when different types of addressee are used with the *Group Approver Type*.

Table 7-9 *Workflow Behavior with the Group Approver Type*

Addressee Value	Description
Individual User DN	<ul style="list-style-type: none">◆ Only the user can see the Approval activity in his or her task list.◆ Only one approval is needed to complete the activity as Approved.
Individual Group DN	<ul style="list-style-type: none">◆ Each member of Group can see the activity in his or her task list.◆ When one member claims the activity, it is removed from task lists of others.◆ Only one approval is needed to complete the activity as Approved.
Individual Role DN	<ul style="list-style-type: none">◆ Each member of the Role can see the activity in his or her task list.◆ When role one member claims the activity, it is removed from task lists of others.◆ Only one approval is needed to complete the activity as Approved.
Multiple User DNs	<ul style="list-style-type: none">◆ Each user in the virtual group can see the activity in his or her task list.◆ When one user from the virtual group claims the activity, the activity is removed from the task lists of others.◆ Only one approval is needed to complete the activity as Approved.
Multiple Group DNs	<ul style="list-style-type: none">◆ Each member in each of the groups can see the activity in his or her task list.◆ When one user from the virtual group claims the activity, the activity is removed from the task lists of others in all of the groups.◆ Only one approval is needed to complete the activity as Approved.
Multiple Role DNs	<ul style="list-style-type: none">◆ Each member in each of the roles can see the activity in his or her task list.◆ When one user from the one of the roles claims the activity, the activity is removed from the task lists of others in all of the other roles.◆ Only one approval is needed to complete the activity as Approved.
Mixture of Users, Groups, and Roles	<ul style="list-style-type: none">◆ Each user and member of each Group or Role can see the activity in his or her task list.◆ When one of the approvers claims the activity, the activity is removed from the task lists of others.◆ Only one approval is needed to complete the activity as Approved.

Multiple Approver Type

The following table describes the workflow behavior when different types of addressee are used with the *Multiple Approver Type*.

Table 7-10 *Workflow Behavior with the Multiple Approver Type*

Addressee Value	Description
Individual User DN	<ul style="list-style-type: none"> ◆ Only the user can see the activity in his or her task list. ◆ Only one approval is needed to complete the activity as Approved.
Individual Group DN	<ul style="list-style-type: none"> ◆ Each member of the group can see the activity in his or her task list. ◆ When one member claims the activity, the activity is removed from the task lists of others. ◆ Only one approval is needed to complete the activity as Approved.
Individual Role DN	<ul style="list-style-type: none"> ◆ Each member of the role can see the activity in his or her task list. ◆ When one role member claims the activity, the activity is removed from the task lists of others in the role. ◆ Only one approval is needed to complete the activity as Approved.
Multiple User DNs	<ul style="list-style-type: none"> ◆ Each user can see the activity in his or her task list. ◆ Each user can claim the activity. ◆ Approval of each user is needed to complete the activity as Approved. ◆ Any single denial completes the activity as Denied.
Multiple Group DNs	<ul style="list-style-type: none"> ◆ Each member in each of the groups can see the activity in his or her task list. ◆ When one member from a group claims the activity, the activity is removed from the task list of others in that Group. ◆ Each group must supply one approval to complete the activity as Approved. ◆ Any single denial completes the activity as Denied.
Multiple Role DNs	<ul style="list-style-type: none"> ◆ Each member in each of the roles can see the activity in his or her task list. ◆ When one member from a role claims the activity, the activity is removed from the task list of others in that role. ◆ Each role must supply one approval to complete the activity as Approved. ◆ Any single denial completes the activity as Denied.
Mixture of Users, Groups, and Roles	<ul style="list-style-type: none"> ◆ Each user and each member of each group or role can see the activity in his or her task list. ◆ Each user can claim the activity, and one member of each group or role can claim the activity (then others in the group or role do not see the task.) ◆ Each user and one member of each group or role must approve to complete the activity as Approved. ◆ Any single denial completes the activity as Denied.

Quorum Approver Type

The following table describes the workflow behavior when different types of addressee are used with the *Quorum Approver Type*.

Table 7-11 Workflow Behavior with the Quorum Approver Type

Addressee Value	Description
Individual User DN	<ul style="list-style-type: none">◆ Only the user can see the activity in his or her task list.◆ Only one approval is needed to complete the activity as Approved.
Individual Group DN	<ul style="list-style-type: none">◆ Each member of the group can see the activity in his or her task list.◆ When one member claims the activity, the activity is removed from the task lists of others.◆ Only one approval is needed to complete the activity as Approved.
Individual Role DN	<ul style="list-style-type: none">◆ Each member of the role can see the activity in his or her task list.◆ When one member claims the activity, the activity is removed from the task lists of others.◆ Only one approval is needed to complete the activity as Approved.
Multiple User DNs	<ul style="list-style-type: none">◆ Each user can see the activity in his or her task list.◆ All users can claim the activity simultaneously.◆ An absolute number or specified percentage of Addressees must approve to complete the activity as Approved.
Multiple Group DNs	<ul style="list-style-type: none">◆ Each member in each group can see the activity in his or her task list.◆ One member of each group can claim the task (then others in the group do not see the task).◆ An absolute number or specified percentage of Addressees must approve to complete the activity as Approved.
Multiple Role DNs	<ul style="list-style-type: none">◆ Each member in each role can see the activity in his or her task list.◆ One member of each role can claim the task (then others in the roles do not see the task).◆ An absolute number or specified percentage of Addressees must approve to complete the activity as Approved.
Mixture of Users, Groups, and Roles	<ul style="list-style-type: none">◆ Each user and each member of each Group or Role can see the activity in his or her task list.◆ Each user can claim the activity, and one member of each group or role can claim the activity (then others in the group do not see the task).◆ An absolute number or specified percentage of Addressees must approve to complete the activity as Approved.

Troubleshooting Invalid Addressees

If the expression specified in the *Addressee* property of an Approval activity evaluates to a non-existent DN (for example, if the expression was hard-coded incorrectly, calculated incorrectly, or submitted incorrectly by a user selection), no indication is given that the workflow is not processing

normally, when it is in fact orphaned. The application server console displays a normal forward message, and the Comment and Flow history shows a normal “assigned” message. To avoid this problem, we recommend that you follow these best practices:

1. Use a Condition activity before the Approval activity and validate the addressee in the Condition activity.
2. Since the addressee could still be deleted after the addressee is validated in the Condition activity, you should specify, for the Approval activity, a timeout interval and a link that performs the desired action in case the workflow times out.

7.3 Log Activity

The Log activity is a system activity that writes messages to a log. To log information about the state of a workflow process, the Workflow System interacts with Novell Audit.

NOTE: Novell Audit can be configured to send its information to Novell Sentinel for additional logging and reporting features.

During the course of its processing, a workflow can log information about various events that have occurred. Users can then use the Novell reporting tools to look at logged data.

Before you can use logging, you must enable logging in the user application.

NOTE: During the course of workflow execution, many system events are logged that are not controlled by the Log activity. For example, the Workflow System writes a message to the log whenever a workflow is started or stopped, or when it is approved, denied, or refused.

- ♦ [Section 7.3.1, “Properties,” on page 233](#)
- ♦ [Section 7.3.2, “Data Item Mapping,” on page 234](#)
- ♦ [Section 7.3.3, “E-Mail Notification,” on page 234](#)

7.3.1 Properties

The Log activity has the following properties:

Table 7-12 *Log Activity Properties*

Property Name	Description
<i>Name</i>	Provides a name for the activity.
<i>Audit</i>	Specifies whether log messages should be sent. When this property is set to True, messages are sent to all log4j channels, including Novell Audit. When this property is set to False, no log messages are sent.
<i>Author</i>	Defines the author for the message. By default, the author is the initiator of the provisioning request.

Property Name	Description
<i>Message</i>	<p>Specifies an ECMA expression that defines text for the log message. Typically, this text indicates where this Log activity is being executed within the process and provides other information that makes the log easy to understand.</p> <p>For details on building ECMA expressions, see Chapter 9, “Working with ECMA Expressions,” on page 315. For descriptions of the system variables available in a workflow, see Section 6.5.3, “Understanding Workflow Data,” on page 187.</p>
<i>Comment</i>	<p>Specifies an ECMA expression that defines text that can be displayed in the user comments. You might use it to record the reason for a request or a request’s completed approval status. Some examples include:</p> <pre>"Reason for request: "+ flowdata.get('reason')</pre> <p>or</p> <pre>"Process has been " + flowdata.get(IDM_COMPLETED_APPROVAL_STATUS')</pre>

7.3.2 Data Item Mapping

Not supported with this activity.

7.3.3 E-Mail Notification

Not supported with this activity.

7.4 Branch Activity

In a workflow that supports parallel processing, the Branch activity allows multiple users to act on different areas of the work item in parallel. After the users have completed their work, the Merge activity synchronizes the incoming branches in the flow.

A workflow can have multiple Branch activities, but each Branch activity must have an associated Merge activity. All flow paths leading out of a Branch activity will execute.

The Branch activity does not support synchronization between the branches while they are executing. Each branch must not depend on data being updated in another branch. The data synchronization is enforced by the Merge activity. After the Merge activity completes, all of the data set in the branches is available.

- ◆ [Section 7.4.1, “Properties,” on page 234](#)
- ◆ [Section 7.4.2, “Data Item Mapping,” on page 235](#)
- ◆ [Section 7.4.3, “E-Mail Notification,” on page 235](#)

7.4.1 Properties

The Branch activity has the following properties:

Table 7-13 *Branch Activity Properties*

Property Name	Description
<i>Name</i>	Provides a name for the activity.

7.4.2 Data Item Mapping

Not supported with this activity.

7.4.3 E-Mail Notification

Not supported with this activity.

7.5 Merge Activity

In a workflow that supports parallel processing, the Merge activity synchronizes the incoming branches in the flow. The Merge activity is used in conjunction with the Branch activity, which allows two users to act on different areas of the work item in parallel. After the users have completed their work, the Merge activity synchronizes the incoming branches.

A workflow can have multiple Branch activities, but each Branch activity must have an associated Merge activity.

- ◆ [Section 7.5.1, “Properties,” on page 235](#)
- ◆ [Section 7.5.2, “Data Item Mapping,” on page 235](#)
- ◆ [Section 7.5.3, “E-Mail Notification,” on page 235](#)

7.5.1 Properties

The Merge activity has the following properties:

Table 7-14 *Merge Activity Properties*

Property Name	Description
<i>Name</i>	Provides a name for the activity.

7.5.2 Data Item Mapping

Not supported with this activity.

7.5.3 E-Mail Notification

Not supported with this activity.

7.6 Condition Activity

The Condition activity lets you add conditional logic to a workflow. This logic can be used to control what happens when the workflow executes. In the Condition activity, you define logic as an ECMA expression that evaluates to a Boolean value.

Each Condition activity must have two outgoing flow paths, one that handles conditions that evaluate to True and another that handles conditions that evaluate to False. Optionally, a third flow path can be added to handle error conditions that occur if the ECMA expression evaluation fails.

- ♦ [Section 7.6.1, “Properties,” on page 236](#)
- ♦ [Section 7.6.2, “Data Item Mapping,” on page 236](#)
- ♦ [Section 7.6.3, “E-Mail Notification,” on page 236](#)

7.6.1 Properties

The Condition activity has the following properties:

Table 7-15 Condition Activity Properties

Property Name	Description
<i>Name</i>	Provides a name for the activity.
<i>Condition Expression</i>	<p>Specifies an ECMA expression that returns True or False. The value returned determines which flow path is followed after the activity has finished executing.</p> <p>TIP: If you need to test whether two objects are equal in a conditional expression, you should use the == operator, rather than the equals() method, unless you are certain that the objects being compared are Java objects of the same type. For instance, use this expression:</p> <pre>(approval_A.getAction() == "DENIED")</pre> <p>instead of this one:</p> <pre>(approval_A.getAction()).equals("DENIED")</pre> <p>For details on building ECMA expressions, see Chapter 9, “Working with ECMA Expressions,” on page 315. For descriptions of the system variables available in a workflow, see Section 6.5.3, “Understanding Workflow Data,” on page 187.</p>

7.6.2 Data Item Mapping

Not supported with this activity.

7.6.3 E-Mail Notification

Not supported with this activity.

7.7 Mapping Activity

The Mapping activity allows you to add or manipulate data in a workflow. It evaluates the source expression and saves the result in the target expression of the associated data items. You can use it as a way to combine data from parallel-processed approval forms after their data is moved to flowdata.

For example, in a parallel approval context you might need to collect data from more than one approval form that is dependent on each other or needs to be calculated with each other. To accomplish this, place a Mapping activity after a Merge activity and before any activities that consume the results (for example, Condition, Entity, Provisioning or another Approval activity).

You can also use the Mapping activity to isolate calls to external Java routines that might manipulate data and be resource intensive, thereby not slowing down user-based Approval activities in either their pre-activity or post-activity mapping phase.

- ♦ [Section 7.7.1, “Properties,” on page 237](#)
- ♦ [Section 7.7.2, “Data Item Mapping,” on page 237](#)
- ♦ [Section 7.7.3, “E-mail Notification,” on page 238](#)

7.7.1 Properties

The Mapping activity has the following properties:

Table 7-16 Mapping Activity Properties

Property Name	Description
<i>Name</i>	Provides a name for the activity.

7.7.2 Data Item Mapping

To bind the data items associated with the Mapping activity, you define pre-activity and post-activity mappings. The pre-activity mappings initialize data in flowdata with constants, values retrieved from the flowdata object, system process variables, system activity variables, or data retrieved via expression calls to the directory abstraction layer. The post-activity mappings move data into the flowdata object.

Table 7-17 Mapping Activity Data Item Mappings

Setting	Description
<i>Source Expression</i>	Specifies a source expression. When you click a cell in the <i>Source Expression</i> column, the ECMA Expression Builder displays to help you define your expression. For example, <pre>function list() { s=new java.lang.String(); if (wi.XPath('count(flow-data/groups)') > 0) s="There was a group selected"; return s;}; list();</pre>

Setting	Description
<i>Target Expression</i>	Specifies a target expression. When you click a cell in the <i>Target Expression</i> column, the ECMA Expression Builder displays to help you define your expression or you can click the <i>Map All</i> button. An example of a target expression is: <code>flowdata.testexpression</code>

7.7.3 E-mail Notification

Not supported with this activity

7.8 Workflow Status

The Workflow Status activity lets you specify the approval status (approved or denied) for workflows that do not contain a provisioning activity (an Entitlement or Entity).

- ♦ [Section 7.8.1, “Properties,” on page 238](#)
- ♦ [Section 7.8.2, “Data Item Mapping,” on page 238](#)
- ♦ [Section 7.8.3, “E-Mail Notification,” on page 238](#)

7.8.1 Properties

The Workflow Status activity has the following properties:

Table 7-18 *Workflow Status Activity Properties*

Property	Description
<i>Name</i>	Specifies the name of the activity.
<i>Workflow Status</i>	Specifies the approval status as an expression: either Approved or Denied.

7.8.2 Data Item Mapping

Not supported with this activity.

7.8.3 E-Mail Notification

Not supported with this activity.

7.9 E-Mail Activity

The E-Mail activity provides a way to send an e-mail to interested parties outside of an approval process.

- ◆ [Section 7.9.1, “Properties,” on page 239](#)
- ◆ [Section 7.9.2, “Data Item Mapping,” on page 239](#)
- ◆ [Section 7.9.3, “E-Mail Notification,” on page 239](#)

7.9.1 Properties

The E-Mail activity has the following properties:

Table 7-19 E-Mail Activity Properties

Property Name	Description
<i>Name</i>	Provides a name for the activity.
<i>Notify by E-Mail</i>	<p>Specifies whether this activity should send e-mail notifications. Set to True to notify by e-mail; otherwise, set to False.</p> <p>You specify the e-mail to send by using the <i>E-Mail Notification</i> tab (see Section 7.9.3, “E-Mail Notification,” on page 239).</p> <p>To use this feature, the <i>Notify participants by E-Mail</i> parameter for the provisioning request definition must be set to true (see Table 4-3, “Overview Properties,” on page 97).</p>

7.9.2 Data Item Mapping

Not supported with this activity.

7.9.3 E-Mail Notification

To enable e-mail notification for this activity, you need to specify the e-mail template to use, as well as source expressions for target tokens in the e-mail body.

Table 7-20 E-Mail Notification Settings for the E-Mail Activity

Setting	Description
<i>E-Mail Template</i>	<p>Specifies the name of the e-mail template to use. By default, the Approval activity uses the Provisioning Notification template.</p> <p>You can edit an e-mail template in Designer. For more information, see “Editing an e-mail template:” on page 181.</p>

Setting	Description
<i>Source/Target</i>	<p data-bbox="792 218 1442 275">Specifies the source expressions for target tokens in the e-mail body.</p> <p data-bbox="792 302 1442 443">The list of target tokens is determined by the selected e-mail template. You cannot add new tokens, but you can assign values to the tokens by building your own source expressions. At runtime, source expressions are evaluated to determine the value of each token.</p> <p data-bbox="792 470 1260 497">The available target tokens are listed below:</p> <ul data-bbox="821 522 1040 982" style="list-style-type: none"> ◆ TO ◆ CC ◆ BCC ◆ REPLYTO ◆ TO_DN ◆ CC_DN ◆ BCC_DN ◆ recipientFullName ◆ initiatorFullName ◆ requestTitle ◆ userFirstName <p data-bbox="792 1010 1442 1178">If you use a provisioning request definition template to create your workflow, each token has a default source expression. The default expressions retrieve values from the workflow process (the process object) or from the data abstraction layer (IDVault object). You can modify these expressions to suit your application requirements.</p> <p data-bbox="792 1205 1406 1255">For details on building ECMA expressions, see Chapter 9, "Working with ECMA Expressions," on page 315.</p>

NOTE

- ◆ E-mail notification is supported only when the *Notify participants by E-Mail* check box is selected on the *Overview* tab, and the *Notify by E-Mail* property for the activity is set to True.
 - ◆ When you create a workflow for use with the Resource Request portlet, and you use the “_default_” as the expression for the TO token, the addressee expression must be an IDVault expression.
 - ◆ If you create an activity using any of the target tokens TO_DN, CC_DN, or BCC_DN, you must specify a user’s DN or an expression that resolves to a user’s DN as the source expression for the token.
 - ◆ If you create an activity using both the target tokens TO and TO_DN, the workflow sends out duplicate notification emails to the target users.
-

7.10 Role Request Binding Activity

The Role Request Binding activity changes the approve or deny attribute in the nrfRequest object. Two such activities are required in any workflow of Flow Type Role Approval or SoD Approval. One Role Request Binding handles the approve condition from an Approval activity and the other handles the deny condition from an Approval activity. The Role Request Binding activities must be completed before the Finish activity or the workflow is considered invalid and cannot be deployed by Designer.

- ♦ [Section 7.10.1, “Properties,” on page 241](#)
- ♦ [Section 7.10.2, “Data Item Mapping,” on page 241](#)
- ♦ [Section 7.10.3, “E-Mail Notification,” on page 241](#)

7.10.1 Properties

The Role Request Binding activity has the following properties:

Table 7-21 Role Request Binding Properties

Property	Description
<i>Name</i>	Provides a name for the activity.
<i>Action</i>	<i>approved</i> : Changes the approve attribute in the nrfRequest object to true. <i>denied</i> : Changes the deny attribute in the nrfRequest object to true.

7.10.2 Data Item Mapping

Not supported with this activity.

7.10.3 E-Mail Notification

Not supported with this activity.

7.11 Role Request Activity

The Role Request activity allows you to automate the granting or revoking of roles to users, groups, or containers. For example, you might write a provisioning request definition that provisions all of the resources and roles a new employee needs on their first day. Using the role request activity, you can automate the approval of that employee for specified roles.

You can also configure the activity to respond to Separation of Duty (SoD) constraint overrides by always approving, or allowing specific cases. You can use the activity to configure the effective and expiration dates for the role, or use it to extend the expiration date of a role.

The Role Request activity runs within the system service security context.

There is no limit on the number of Role Request activities allowed within a workflow.

The Role Request activity fails if the requested role DN or the target DN is invalid, or does not exist.

The result of the role request is written as a system comment to the comment history.

The Role Request activity does not support the ability to set the originator of the request. Use Simple Object Access Protocol (SOAP) calls rather than this activity when you need this information.



- ◆ [Section 7.11.1, “Properties,” on page 242](#)
- ◆ [Section 7.11.2, “Data Item Mapping,” on page 246](#)
- ◆ [Section 7.11.3, “E-Mail Notification,” on page 246](#)


7.11.1 Properties

The Role Request activity has the following properties:

Table 7-22 *Role Request Properties*


Property Name	Description
<i>Name</i>	Required. Provides a localizable name for the activity.
<i>Description</i>	Required. Text that describes the reason for the assignment request. This corresponds to the <i>Initial Request Description</i> field of the <i>Request Roles Assignment</i> tab.
<i>Action</i>	<p>Specifies the action the activity should perform. Select a value from the drop-down list. The values are:</p> <ul style="list-style-type: none"> ◆ grant (default): Use this value if the role should be granted. ◆ revoke: Use this value if the role should be revoked. ◆ extend: Use this value to extend the expiration date of the specified role. The role must already be granted, and the value that you specify in Expiration Date must be later than the one currently specified.
<i>Roles</i>	<p>Required. An expression that resolves to a list of requested roles. For information on building this expression, see “Specifying the Roles and Targets Properties” on page 244.</p> <p>This is an example of the script to request a specific role:</p> <pre>'CN=Administer Drugs,CN=Level10,CN=RoleDefs,CN=RoleConfig,CN=AppConfig,' + PROVISIONING_DRIVER</pre> <p>In this script example, the value is retrieved from flowdata:</p> <pre>flowdata.get('Start/request_form/role')</pre>
<i>Target Type</i>	<p>Required. Specifies the type of object that the requested role will be assigned. Choose one of the values from the list. The values are:</p> <ul style="list-style-type: none"> ◆ <i>user</i> (default) ◆ <i>group</i> ◆ <i>container</i> ◆ <i>container with subtree</i>

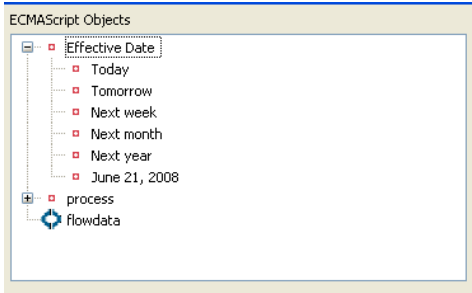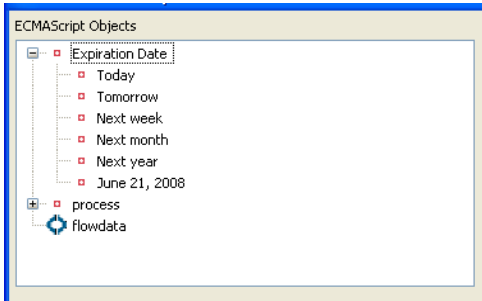
Property Name	Description
<i>Effective Date</i>	<p>The date when the role assignment goes into effect. If no date is specified, the assignment is effective immediately after it is requested. You can use the Expression Builder convenience methods to specify this value.</p> 
<i>Targets</i>	<p>Required. An expression that resolves to the DN of the object for whom the role is requested. The target can be users, groups, or containers depending on Target Type value. The targets that you specify must resolve to the Target Type specified.</p> <p>For information on building this expression, see “Specifying the Roles and Targets Properties” on page 244.</p> <p>The following examples show a script for targets:</p> <pre>'cn=ablake,ou=users,ou=medical-idmsample,o=novell'</pre> <p>To retrieve the value from flowdata:</p> <pre>flowdata.get('Start/request_form/group')</pre>
<i>Expiration Date</i>	<p>The date when the role assignment expires. If not specified, the assignment remains in effect indefinitely. You can use the Expression Builder's convenience methods to specify this value.</p> 
<i>Correlation ID</i>	<p>An optional string field. If not supplied, it defaults to the process instance ID. This string must be less than or equal to 64 characters.</p>
<i>SoD Override Request</i>	<p>Optional field. Defines how the Role Request activity should handle a request that causes an SoD constraint violation. Values are:</p> <ul style="list-style-type: none"> ◆ true: SoD override is requested for all encountered conflicts. ◆ false (default): An SoD override is not requested for all encountered conflicts. Role Request activity uses the list of SoDs in the SoD Overrides property to determine which SoD constraints to override.

Property Name	Description
<i>Override Justification</i>	<p>Optional field. Available when <i>SoD Override Request</i> is false. Describes why an exception to the SoD constraint is necessary. If no value is specified, the <i>Description</i> is used. This example shows how to retrieve the value from flowdata.</p> <pre>flowdata.get('Start/request_form/reason')</pre>
<i>SoD Overrides</i>	<p>Available when the SoD Override Request is false. It is a list of one or more SoD constraints to override. When an SoD constraint is encountered and the constraint is in this list, the role request activity will request the role. If the SoD is not in this list, the role request activity will stop executing and follow the error link.</p> <p>You can use the Expression Builder's convenience methods to build the expression. The list contains the local list of SoDs defined for this project. For example:</p>  <p>Selecting the Doctor-Nurse SoD generates an expression like this:</p> <pre>'cn=Doctor-Nurse,cn=SoDDefs,cn=RoleConfig, cn=AppConfig,' + PROVISIONING_DRIVER'</pre>

Specifying the Roles and Targets Properties


Designer provides a convenient way to build the Roles and Targets expressions using the Expression Builder.

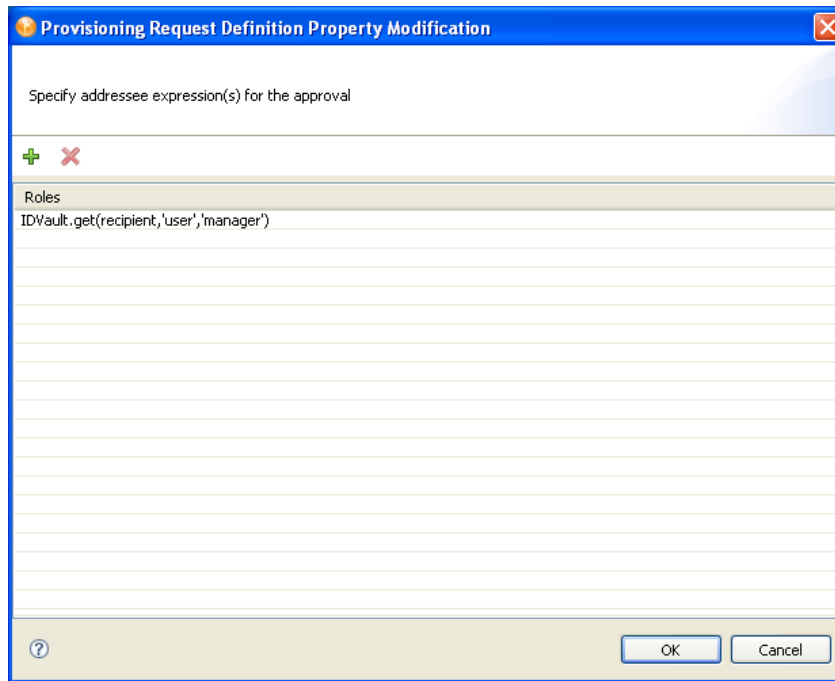- 1 Click the  button in the property's *Value* column. Designer launches this dialog box for adding or removing expressions.




- 2 Click + to add a new Roles or Targets expression by using the Expression Builder.

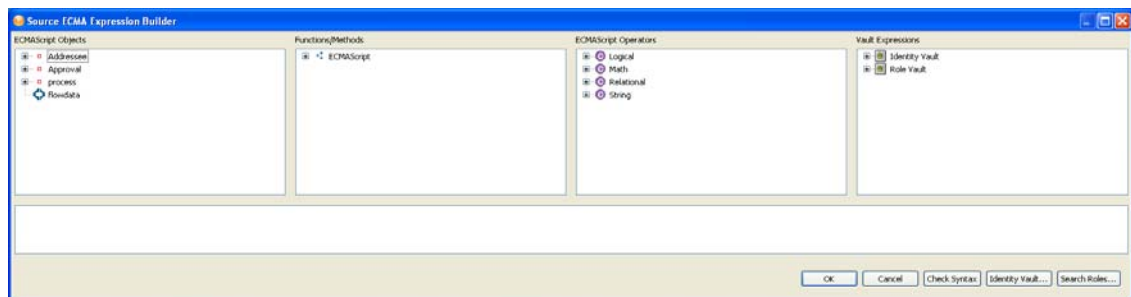The dialog box displayed by Designer varies depending on whether you are specifying Roles or Targets. This dialog shows an example of the dialog box displayed to specify Roles because it includes the *Search Roles* button.



You can choose one of the ECMAScript Objects to build the Roles or Targets expression, or use the *Identity Vault* button to select a specific object. Click *Search Roles* to locate a role.

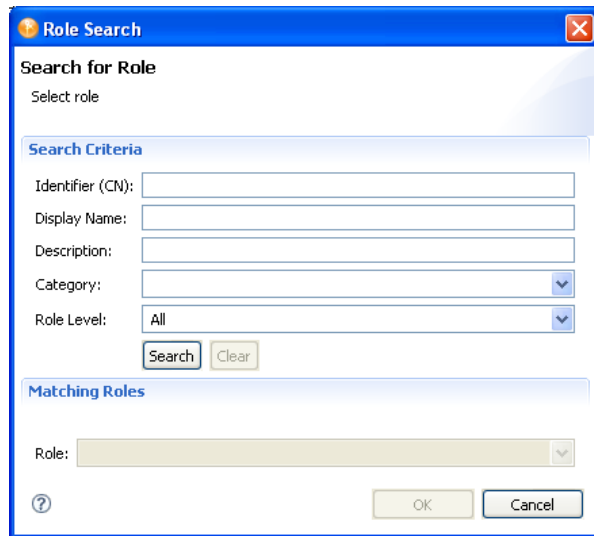- 2a To choose specify a Role, click *Search Roles*.



- 2b** In the dialog box, specify the *CN*, *Display Name*, *Description*, *Role Category*, and *Role Level* on which you want to search.

For *CN*, *Display Name*, and *Description*, you can enter a wildcard (such as *S**, **S*) or regular expressions (such as *[A-Z][a-z]**).

You can enter a value for all of the fields or none of the fields. If you do not supply a value in a particular field, the search returns all of the possible values for that field. If you enter a value in one or more of the fields, the values are ANDed together to create the search filter. The search occurs on the roles defined locally. Roles matching the search criteria are displayed in the *Matching Roles* selection list.

- 2c** Select a role from the *Roles* selection list, then click *OK*. The role is added to the expression area.
- 3** Click *OK* after you are satisfied with expression. Repeat Step 2 to continue to add more expressions.

7.11.2 Data Item Mapping

Not supported with this activity.

7.11.3 E-Mail Notification

Not supported with this activity.

7.12 Resource Request Binding Activity

The Resource Request Binding activity changes the approve or deny attribute in the *nrfResourceRequest* object. Two such activities are required in any workflow of Flow Type Resource Approval. One Resource Request Binding handles the approve condition from an Approval activity

and the other handles the deny condition from an Approval activity. The Resource Request Binding activities must be directly before the Finish activity or the workflow is considered invalid and cannot be deployed by Designer.

- ◆ [Section 7.12.1, “Properties,” on page 247](#)
- ◆ [Section 7.12.2, “Data Item Mapping,” on page 247](#)
- ◆ [Section 7.12.3, “E-Mail Notification,” on page 247](#)

7.12.1 Properties

The Resource Request Binding activity has the following properties:

Table 7-23 Resource Request Binding Properties

Property	Description
<i>Name</i>	Provides a name for the activity.
<i>Action</i>	<i>approved</i> : Changes the approve attribute in the nrfResourceRequest object to true. <i>denied</i> : Changes the deny attribute in the nrfResourceRequest object to true.

7.12.2 Data Item Mapping

Not supported with this activity.

7.12.3 E-Mail Notification

Not supported with this activity.

7.13 Resource Request Activity

The Resource Request activity allows you to automate the granting or revoking of resources to users. For example, you might write a provisioning request definition that provisions all of the resources a new employee needs on their first day. Using the resource request activity, you can automate the approval of that employee for specified resources.

The Resource Request activity runs within the system service security context.

There is no limit on the number of Resource Request activities allowed within a workflow.

The Resource Request activity fails if the requested resource DN or the target DN is invalid, or does not exist.

The result of the resource request is written as a system comment to the comment history.

The Resource Request activity does not support the ability to set the originator of the request. Use SOAP calls rather than this activity when you need this information.

- ◆ [Section 7.13.1, “Properties,” on page 248](#)
- ◆ [Section 7.13.2, “Data Item Mapping,” on page 250](#)
- ◆ [Section 7.13.3, “E-Mail Notification,” on page 250](#)

7.13.1 Properties


The Resource Request activity has the following properties:


Table 7-24 Role Request Properties

Property Name	Description
<i>Name</i>	Required. Provides a localizable name for the activity.
<i>Resources</i>	<p>Required. An expression that resolves to a list of requested resources. For information on building this expression, see “Specifying the Roles and Targets Properties” on page 244.</p> <p>This is an example of the script to request a specific resource:</p> <pre>'CN=Administer Drugs,CN=ResourceDefs,CN=ResourceConfig,CN=AppConfig,' + PROVISIONING_DRIVER</pre> <p>In this script example, the value is retrieved from flowdata:</p> <pre>flowdata.get('Start/request_form/resource')</pre>
<i>Description</i>	Required. Text that describes the assignment request. This corresponds to the <i>Initial Request Description</i> field of the <i>Request Resources Assignment</i> tab.
<i>Action</i>	<p>Specifies the action the activity should perform. Select a value from the drop-down list. The values are:</p> <ul style="list-style-type: none">◆ grant (default): Use this value if the resource should be granted.◆ revoke: Use this value if the resource should be revoked.◆ extend: Use this value to extend the expiration date of the specified resource. The resource must already be granted, and the value that you specify in Expiration Date must be later than the one currently specified.
<i>Correlation ID</i>	An optional string field. If not supplied, it defaults to the process instance ID. This string must be less than or equal to 64 characters.
<i>Targets</i>	<p>Required. An expression that resolves to the DN of the object for whom the resource is requested. The target must be an object of the User class only. The targets that you specify must resolve to the Target Type specified.</p> <p>For information on building this expression, see “Specifying the Roles and Targets Properties” on page 244.</p> <p>The following examples show a script for targets:</p> <pre>'cn=ablake,ou=users,ou=medical-idmsample,o=novell'</pre>
<i>Entitlement Params</i>	Optional. A parameter required by the entitlement driver. For example, if the entitlement operation grants access to the Sales group, the parameter might specify the group.


Specifying a Resource and Targets Properties

Designer provides a convenient way to build the Resource and Targets expressions by using the Expression Builder.

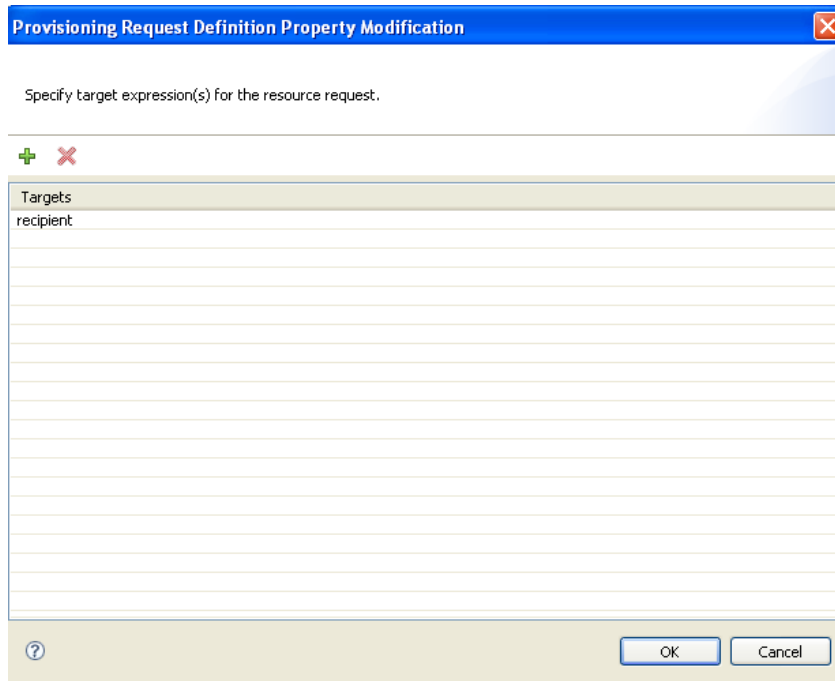- 1 Click the  button in the property's *Targets* or *Entitlement Params* column. Designer launches this dialog box for adding or removing expressions.



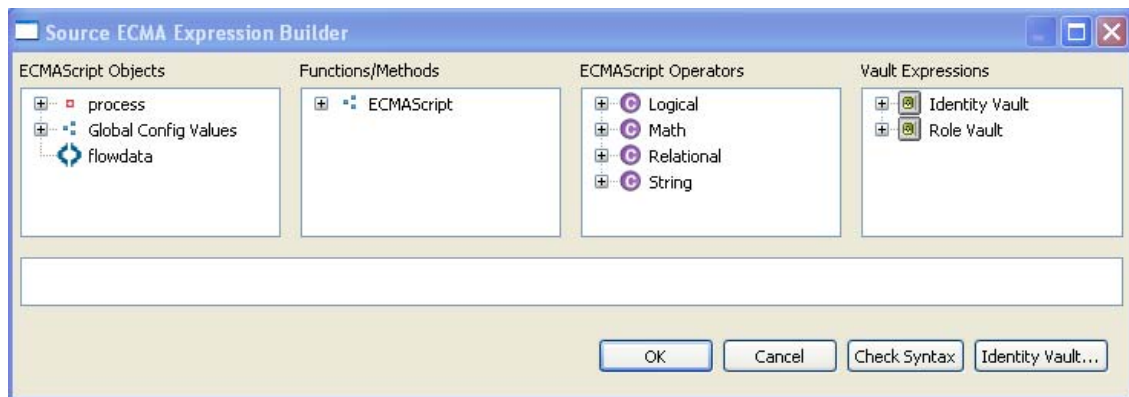- 2 Click + to add a new Resource or Targets expression by using the Expression Builder.



You can choose one of the ECMAScript Objects to build the Resource or Targets expression, or use the *Identity Vault* button to select a specific resource.

- 3 Click *OK* after you are satisfied with expression. Repeat [Step 2](#) to continue to add more expressions.

IMPORTANT: You cannot specify values to the resource request form fields at the time of resource request activity through Designer.

7.13.2 Data Item Mapping

Not supported with this activity.

7.13.3 E-Mail Notification

Not supported with this activity.

7.14 Start Workflow Activity

The Start Workflow activity allows you to invoke a workflow instance from within a provisioning request definition. The workflows you invoke branch; they are not subflows.

You can group these related workflows by using the Correlation ID.

- ♦ [Section 7.14.1, “Properties,” on page 250](#)
- ♦ [Section 7.14.2, “Data Item Mapping,” on page 251](#)
- ♦ [Section 7.14.3, “E-Mail Notification,” on page 251](#)

7.14.1 Properties

The Start Workflow activity has the following properties:

Table 7-25 Start Workflow Properties

Property	Description
<i>Activity Id</i>	<p>Specify a unique string value that identifies the activity. Activity Ids are written to the user application's log file. Specifying a meaningful Activity Id makes it easier to understand the data written to the logs. You can specify letters, numbers, and the underscore (_) character.</p> <p>If you do not specify a value, the Activity Id defaults to <i>ActivityNN</i> where the <i>NN</i> represents the order in which the activity was added to the workflow.</p>
<i>Name</i>	<p>Provides a name for the activity.</p>
<i>Provisioning Request Defn to start</i>	<p>An expression that resolves to the distinguished name of the provisioning request definition to invoke. You can select the provisioning request from the Expression Builder. The possible selections are provisioning requests whose Status is <i>Active</i> and whose Process Type is <i>Normal</i>.</p>
<i>Recipient</i>	<p>An expression that resolves to one or more user or group distinguished names.</p> <p>To specify multiple values, click <i>Recipient List</i> (in the ECMAScript Objects panel of the Expression Builder). This generates a pre-built function called <i>multirecipient()</i>. Replace <i>'Enter recipient '</i> with the distinguished name of a user or group as needed to include all of the recipients for the workflow.</p> <p>A separate workflow process is created for each recipient that you specify.</p>
<i>Correlation ID</i>	<p>An expression that lets you group the workflows invoked from this activity. If you do not supply a value, the workflow engine supplies a default, which is the request ID of the current workflow.</p>

7.14.2 Data Item Mapping

To pass the data needed by the workflow you want to start, you must specify data item mappings. The data items you must specify depend on the workflow that is to be started. The Data Item Mapping view displays the fields required by the *Provisioning Request Defn to start*. Because the Provisioning Request Defn to start is an expression, it might evaluate properly only at runtime. This would be the case in a workflow where the user could choose a workflow to start from a form field, and that value gets mapped to flowdata, and that flowdata expression is used in the Provisioning Request Defn to start property. To account for this, the Data Item Mapping view changes based on whether the workflow to start can be determined at design time. If so, then the data items to start that workflow are shown. However, if the workflow is not known at design time, then the workflow developer must specify them.

The Start Workflow activity has the following data item mappings:

Table 7-26 Start Workflow Data Item Mapping Properties

Setting	Description
<i>Source Expression</i>	An expression used to initialize the data items needed by the <i>Provisioning Request Defn to Start</i> . When you click a cell in the <i>Source Expression</i> column, the ECMA Expression Builder displays to help you define your expression.
<i>Target Form Field</i>	A read-only field that specifies target fields for the initialization data specified in the Source Expression. If the workflow cannot be determined at design time, this field is editable.
<i>Data Type</i>	Specify the data type for this data item.
<i>Multivalued</i>	A read-only field that specifies if the workflow can accept multiple values for this parameter. If this value is true, you can specify multiple values by using the syntax provided in the Expression Builder. If the workflow cannot be determined at design time, this field is not present.

7.14.3 E-Mail Notification

Not supported with this activity.

7.15 Finish Activity

The Finish activity marks the completion of a workflow. When the Finish activity executes, an e-mail message is sent to notify participants that the workflow has finished.

- ◆ [Section 7.15.1, “Properties,” on page 251](#)
- ◆ [Section 7.15.2, “Data Item Mapping,” on page 252](#)
- ◆ [Section 7.15.3, “E-mail Notification,” on page 252](#)

7.15.1 Properties

The Finish activity has the following properties:

Table 7-27 Finish Activity Properties

Property	Description
<i>Activity Id</i>	<p>Specify a unique string value that identifies the activity. Activity Ids are written to the user application's log file. Specifying a meaningful Activity Id makes it easier to understand the data written to the logs. You can specify letters, numbers, and the underscore (_) character.</p> <p>If you do not specify a value, the Activity Id defaults to Activity<i>NN</i> where the <i>NN</i> represents the order in which the activity was added to the workflow.</p>
<i>Name</i>	Provides a name for the activity.
<i>Notify by E-Mail</i>	<p>Provides a method of triggering an e-mail notification when the Finish activity is executed. When this property is set to True, an e-mail notification is sent. When this property is set to False, no e-mail notification is sent.</p> <p>See Section 7.15.3, "E-mail Notification," on page 252 for information about setting up the e-mail notification.</p>

7.15.2 Data Item Mapping

Not supported with this activity.

7.15.3 E-mail Notification

To enable e-mail notification for the Finish activity, you need to specify the e-mail template to use, as well as source expressions for target tokens in the e-mail body.

Table 7-28 E-Mail Notification Settings for the Finish Activity

Setting	Description
<i>E-Mail Template</i>	<p>Specifies the name of the e-mail template to use. By default, the Finish activity uses the Provisioning Approval Completed Notification template.</p> <p>You can edit an e-mail template in Designer. See "Editing an e-mail template:" on page 181 for more information.</p>

Setting	Description
Source	Specifies the source expressions for target tokens in the e-mail body.
Target	<p>The list of target tokens is determined by the selected e-mail template. You cannot add new tokens, but you can assign values to the predefined tokens by building your own source expressions. At runtime, the source expressions are evaluated to determine the value of each token.</p> <p>The available target tokens for the Provisioning Approval Completed Notification e-mail template are listed below:</p> <ul style="list-style-type: none"> ◆ TO ◆ CC ◆ BCC ◆ REPLYTO ◆ TO_DN ◆ CC_DN ◆ BCC_DN ◆ requestStatus ◆ requestSubmissionTime ◆ requestID ◆ recipientFullName ◆ initiatorFullName ◆ requestTitle <p>If you use a provisioning request definition template to create your workflow, each token has a default source expression. The default expressions retrieve values from the workflow process (the process object) or from the data abstraction layer (IDVault object). You can modify these expressions to suit your application requirements.</p> <p>For details on building ECMA expressions, see Chapter 9, "Working with ECMA Expressions," on page 315.</p>

NOTE

- ◆ E-mail notification is supported only when the *Notify participants by E-Mail* check box is selected on the *Overview* tab.
 - ◆ When you create a workflow for use with the Resource Request portlet, and you use `_default_` as the expression for the TO token, the addressee expression must be an IDVault expression.
 - ◆ If you create an activity using any of the target tokens TO_DN, CC_DN, or BCC_DN, you must specify a user's DN or an expression that resolves to a user's DN as the source expression for the token.
 - ◆ If you create an activity using both the target tokens TO and TO_DN, the workflow sends out duplicate notification emails to the target users.
-

7.16 Rest Activity

The Rest activity enables users to call REST endpoints or resources when processing workflow data. The activity allows workflows to exchange data with arbitrary REST services. Data sent to a REST service can integrate a workflow with other systems inside and outside the organization. Data received from a REST service can provide decision support information on approval forms. You create flowdata variables to move data between the workflow and the REST service.

- ◆ [Section 7.16.1, “Properties,” on page 254](#)
- ◆ [Section 7.16.2, “Data Item Mapping,” on page 256](#)
- ◆ [Section 7.16.3, “E-Mail Notification,” on page 257](#)

7.16.1 Properties

The Rest activity has the following properties. Note that most activity properties are ECMAScript expressions, so ensure that you configure each property by clicking the “E” icon in the property field to open the ECMA Expression Builder.

Table 7-29 Rest Activity Properties

Property Name	Description
<i>Activity Id</i>	<p>Specify a unique string value that identifies the activity. Activity Ids are written to the user application’s log file. Specifying a meaningful Activity Id makes it easier to understand the data written to the logs. You can specify letters, numbers, and the underscore (_) character.</p> <p>If you do not specify a value, the Activity Id defaults to Activity<i>NN</i> where the <i>NN</i> represents the order in which the activity was added to the workflow.</p>
<i>Name</i>	Provides a name for the activity.
<i>Protocol</i>	<p>Specifies the protocol the activity uses when calling the REST server. You can specify either <i>http</i> or <i>https</i>.</p> <p>NOTE: If you specify <i>https</i>, you must also configure the <i>Trust Manager</i> property for the activity.</p>
<i>Host</i>	Specifies the REST server the activity calls to request or modify data.
<i>Port</i>	Specifies the port number the activity uses when calling the REST server.
<i>Path</i>	<p>Specifies the encoded URL path the activity uses when calling the REST server. If the path includes any reserved characters, you must URL encode the path. For more information about URL encoding, see http://en.wikipedia.org/wiki/Percent-encoding (http://en.wikipedia.org/wiki/Percent-encoding).</p> <p>In the ECMA Expression Builder, select <i>URL Path Encoding > URL encode the path</i> and modify the path to include the URL path expression to encode.</p>

Property Name	Description
<i>Method</i>	<p>Specifies the method the activity uses to retrieve data from or modify data on the REST server. The choices are:</p> <ul style="list-style-type: none"> ◆ get ◆ put ◆ post ◆ delete ◆ head
<i>Authorization Header</i>	<p>Specifies the Authorization header the activity uses when calling the REST server. In many cases, the REST server expects the header to be in the “Basic Authentication” format. For more information about the “Basic Authentication” format, see http://en.wikipedia.org/wiki/Basic_authentication (http://en.wikipedia.org/wiki/Basic_authentication).</p> <p>If this is the case, in the ECMA Expression Builder, select <i>Basic Auth Header</i> and modify the header to include the username and password used to access the REST server.</p>
<i>Accept Header</i>	<p>Specifies the Accept header the activity uses when receiving data from the REST server. The Accept header tells the REST server the format in which it should return data. The activity can receive data in either XML or JSON format. The choices are:</p> <ul style="list-style-type: none"> ◆ application/json ◆ application/xml
<i>Http Headers</i>	<p>Specifies any additional HTTP headers the activity uses when calling the REST server. Specify both header name and value expressions, as necessary, using quotation marks around each expression.</p>
<i>Timeout</i>	<p>Specifies a dynamic expression that defines the period of time, in milliseconds, allotted for the Rest activity to complete. The timeout interval applies each time the activity is executed by the addressee.</p> <p>For details on building ECMA expressions, see Chapter 9, “Working with ECMA Expressions,” on page 315. For descriptions of the system variables available in a workflow, see Section 6.5.3, “Understanding Workflow Data,” on page 187.</p>
<i>Trust Managers</i>	<p>If the activity uses the https protocol, this property specifies one or more trust managers used to authenticate the connection to the REST server. The property expression must evaluate to <code>TrustManager</code>, <code>TrustManager []</code>, or <code>List<TrustManager></code>.</p> <p>The default choices available in the ECMA Expression Builder are:</p> <ul style="list-style-type: none"> ◆ Trust All Certs ◆ Trust Certs in default keystore ◆ Trust Certs in specified keystore

7.16.2 Data Item Mapping

To bind the data items associated with the Rest activity, you define pre-activity and post-activity mappings. The pre-activity mappings map values retrieved from the flowdata object to attributes in the Input message for the REST server that will be accessed by the Rest activity. The post-activity mappings map the response from the REST server back into the flowdata object.

Table 7-30 Rest Activity Data Item Mappings

Setting	Description
<i>Pre-Activity</i>	<p>If the REST service you want to call requires payload data, you need to specify pre-activity mappings. This is normally the case when you use a PUT or POST request.</p> <p>When this option is selected, you can double-click a cell in the <i>Source Expression</i> column to specify where the Rest activity gets data for a particular REST server input field. In particular, you can set a source expression for Content Type and Content, as follows:</p> <ul style="list-style-type: none">♦ Content Type: The value of this type of expression is normally either <code>application/json</code> or <code>application/xml</code>, depending on the data type you want to send to the server.♦ Content: This type of expression evaluates to a JSON- or XML-formatted string for the expected payload. If the expected format is JSON, look at the helper functions in the ECMA Expression Builder, under <i>Vault Expressions > Script Vault</i>. In particular, the helper function <i>Convert object to JSON</i> may be useful, as it enables you to create a JSON string from an ECMAScript object. <p>While you can build the JSON string using conventional expressions, the <i>Convert object to JSON</i> function may be easier and less prone to errors, especially for complex JSON expressions. See the following example for one possible expression using the function:</p> <pre>ScriptVault.JSON.stringify((function () { var test = {}; test.val = "1"; test.arrayVal = ["one", "two"]; return test;} ()))</pre>

Setting	Description
<i>Post-Activity</i>	<p>If the REST service returns data you want to capture, you need to specify post-activity mappings. This is normally the case for most requests.</p> <p>When this radio button is selected, you can double-click a cell in the <i>Target Expression</i> column to specify where data from a REST server output field should be copied after the form has been processed. In particular, you can set a source expression for Status Code, Content Type, and Content, as follows:</p> <ul style="list-style-type: none"> ♦ Status Code: The value of this expression is the HTTP status code from the REST call. ♦ Content Type: The value of this type of expression is normally either <code>application/json</code> or <code>application/xml</code>, depending on the format of the data the server returns. ♦ Content: This type of expression evaluates to a JSON- or XML-formatted string the returned data. If the format of the returned data is JSON, look at the helper functions in the ECMA Expression Builder, under <i>Vault Expressions > Script Vault</i>. In particular, the helper function <i>Convert object to JSON</i> may be useful, as it enables you to create a JSON string from an ECMAScript object. <p>You can use the <i>Map All</i> button to map the Content field into flowdata in the Rest activity, then use the content by extracting fields in a subsequent activity using the <i>Convert object to JSON</i> helper function. For example, in a workflow where you have mapped the content returned from the REST call to <code>flowdata.processInstances</code>, you can use the following expression to obtain the JSON property <code>totalSize</code>:</p> <pre>(function () { var processInstances = ScriptVault.JSON.parse(flowdata.get('processInstances')); var size = processInstances.totalSize; return size;}) ();</pre>
<i>Source Expression</i>	Specifies a source expression. When you click a cell in the <i>Source Expression</i> column, the ECMA Expression Builder displays to help you define your expression. It is recommended that you click the <i>Map All</i> button to allow Designer to generate this expression for you.
<i>Target Expression</i>	Specifies a target expression. When you click a cell in the <i>Target Expression</i> column, the ECMA Expression Builder displays to help you define your expression. It is recommended that you click the <i>Map All</i> button to allow Designer to generate this expression for you.

7.16.3 E-Mail Notification

Not supported with this activity.

7.17 Integration Activity

The Integration activity provides a way to use a Web service to process workflow data. For detailed information about using the Integration activity, see [Chapter 8, “Working with Integration Activities,”](#) on page 267.

- ♦ [Section 7.17.1, “Properties,”](#) on page 258
- ♦ [Section 7.17.2, “Data Item Mapping,”](#) on page 259
- ♦ [Section 7.17.3, “E-Mail Notification,”](#) on page 260

7.17.1 Properties

The Integration activity has the following properties.

Table 7-31 Integration Activity Properties

Property Name	Description
<i>Activity Id</i>	<p>Specify a unique string value that identifies the activity. Activity Ids are written to the user application’s log file. Specifying a meaningful Activity Id makes it easier to understand the data written to the logs. You can specify letters, numbers, and the underscore (_) character.</p> <p>If you do not specify a value, the Activity Id defaults to Activity<i>NN</i> where the <i>NN</i> represents the order in which the activity was added to the workflow.</p>
<i>Name</i>	<p>Provides a name for the activity.</p>
<i>WSDL Resource</i>	<p>Specifies a WSDL file for the Web service to be used in the Integration activity. After it is specified, the WSDL is incorporated into the provisioning request definition file.</p> <p>When you select a WSDL file, a dialog box is displayed that you use to select the Web service port type and operation that you want to use in the Integration activity.</p> <p>You can also specify a SOAP endpoint for the Integration activity and configure authentication for the SOAP service. For more information about specifying a WSDL file and configuring the Integration activity, see Section 8.2, “Adding an Integration Activity,” on page 267.</p>
<i>Timeout</i>	<p>Specifies a dynamic expression that defines the period of time allotted for the Integration activity to complete. The timeout interval applies each time the activity is executed by the addressee.</p> <p>For details on building ECMA expressions, see Chapter 9, “Working with ECMA Expressions,” on page 315. For descriptions of the system variables available in a workflow, see Section 6.5.3, “Understanding Workflow Data,” on page 187.</p>

Property Name	Description
<i>Retry Count</i>	<p>Specifies the number of times to retry the activity in the event of a timeout.</p> <p>When an activity times out, the workflow process can try to complete the activity again, depending on the retry count specified for the activity. If the last retry times out, the activity can be marked as success, fault, error, or timed out, depending on the final timeout action specified for the activity.</p>
<i>Final Timeout Action</i>	<p>Determines the final state of the request in the event that the Integration activity times out. The choices are:</p> <ul style="list-style-type: none"> ◆ success ◆ fault ◆ error ◆ timedout

7.17.2 Data Item Mapping

To bind the data items associated with the Integration activity, you define pre-activity and post-activity mappings. The pre-activity mappings map values retrieved from the flowdata object to attributes in the Input message for the Web service that will be accessed by the Integration activity. The post-activity mappings map the response from the Web service back into the flowdata object. For more information about data item mapping for Integration activities, see [Section 8.3, “Moving Data to and from the Integration Activity,”](#) on page 269.

Table 7-32 Integration Activity Data Item Mappings

Setting	Description
Pre-Activity	<p>Allows you to specify one or more pre-activity mappings. When this option is selected, you can double-click a cell in the <i>Source Expression</i> column to specify where the Integration activity gets data for a particular Web service input field.</p> <p>NOTE: When the <i>Pre-Activity</i> option is selected, the cells in the <i>Web Service Input Field</i> column are not editable.</p>
Post-Activity	<p>Allows you to specify one or more post-activity mappings. When this radio button is selected, you can double-click a cell in the <i>Target Expression</i> column to specify where data from a Web service output field should be copied after the form has been processed.</p> <p>NOTE: When the <i>Post-Activity</i> option is selected, the cells in the <i>Web Service Output Field</i> column are not editable.</p>
<i>Source Expression</i>	<p>Specifies a source expression. When you click a cell in the <i>Source Expression</i> column, the ECMA Expression Builder displays to help you define your expression. For example, <code>flowdata.get('Start/RequestRate/Country1')</code> for a Web service input, or <code>flowdata.Start/RequestRate/Country1</code> for a Web service output field.</p>

Setting	Description
<i>Web Service Input Field</i>	This column displays all of the input fields for the port type and operation specified when the WSDL file was selected. The fields in this column are automatically populated. If you want to remove an input field, click <i>Mapping</i> , expand the nodes of the sample document and deselect any input fields that you want to remove.
<i>Web Service Output Field</i>	This column displays all of the output fields for the port type and operation specified when the WSDL file was selected. The fields in this column are automatically populated. If you want to remove an output field, click <i>Mapping</i> , expand the nodes of the sample document and deselect any output fields that you want to remove.
<i>Mapping</i>	Displays a hierarchical view of the sample document for the inputs to or outputs from the Web service. You can use this feature to deselect input or output fields (by default, all Web service input and output fields are selected).

7.17.3 E-Mail Notification

Not supported with this activity.

7.18 Entitlement Activity

The Entitlement activity grants or revokes an entitlement for a user or other entity type.

A workflow must have at least one Entitlement or Entity activity.

- ♦ [Section 7.18.1, “Properties,” on page 260](#)
- ♦ [Section 7.18.2, “Data Item Mapping,” on page 261](#)
- ♦ [Section 7.18.3, “E-Mail Notification,” on page 261](#)

7.18.1 Properties

The Entitlement activity has the following properties:

Table 7-33 Entitlement Activity Properties

Property Name	Description
<i>Activity Id</i>	Specify a unique string value that identifies the activity. Activity Ids are written to the user application’s log file. Specifying a meaningful Activity Id makes it easier to understand the data written to the logs. You can specify letters, numbers, and the underscore (_) character. If you do not specify a value, the Activity Id defaults to Activity <i>NN</i> where the <i>NN</i> represents the order in which the activity was added to the workflow.
<i>Name</i>	Provides a name for the activity.

Property Name	Description
<i>Set Workflow Status</i>	Specifies the approval status of the provisioning request. Set to True for approved; otherwise, set to False. This method of setting workflow status overrides other methods (for example, the <i>Set Default Completion Status to Approved</i> parameter (see Table 4-3, “Overview Properties,” on page 97) or the <i>Approval Status</i> activity (see Section 7.8, “Workflow Status,” on page 238).

7.18.2 Data Item Mapping

To bind the data items associated with the Entitlement activity, you define mappings for several DirXML® attributes.

Table 7-34 Entitlement Activity Data Item Mappings

Setting	Description
Source Expression	<p>Specifies a source expression for a DirXML mapping. When you click a cell in the <i>Source Expression</i> column, the ECMA Expression Builder displays to help you define your expression.</p> <p>The DirXML mappings for the Entitlement are described below:</p> <ul style="list-style-type: none"> ◆ dn is the distinguished name for the recipient of the entitlement. ◆ DirXML-Entitlement-DN is the distinguished name of the entitlement to execute. For example, the entitlement might be identified as follows: <ul style="list-style-type: none"> 'CN=Groups, CN=GroupEntitlementLoopback, CN=TestDrivers, O=novell' <p>You can use the ECMA Expression Builder's <i>ECMAScript Variable</i> panel to see a list of all the entitlements in the driver. To select an entitlement, double-click the full distinguished name of the entitlement.</p> ◆ DirXML-Entitlement-Action indicates whether the entitlement is granted or revoked. If the operation grants the entitlement, the value must be 1; if it revokes the entitlement, the value must be 0. ◆ DirXML-Entitlement-Parameter specifies a parameter required by the entitlement driver. For example, if the entitlement operation grants access to the Sales group, the parameter might specify the group as follows: <ul style="list-style-type: none"> '\\MYTREE\\novell\\idmsample-doc\\groups\\Sales' ◆ DirXML-Entitlement-MultiValueAllowed indicates whether the entitlement supports multiple values. If it supports multiple values, the value must be True; otherwise, it must be False.

For details on building ECMA expressions, see [Chapter 9, “Working with ECMA Expressions,”](#) on page 315.

7.18.3 E-Mail Notification

Not supported with this activity.

7.19 Entity Activity

The Entity activity updates an entity in the Identity Vault. You can use this activity to create, modify, or delete attributes on an entity. You can also use this activity to create or delete an entity (see [Section 7.19.4, “Working with Entity Activities,” on page 264](#)).

A workflow must have at least one Entitlement or Entity activity.

- ♦ [Section 7.19.1, “Properties,” on page 262](#)
- ♦ [Section 7.19.2, “Data Item Mapping,” on page 263](#)
- ♦ [Section 7.19.3, “E-Mail Notification,” on page 264](#)
- ♦ [Section 7.19.4, “Working with Entity Activities,” on page 264](#)

7.19.1 Properties

The Entity activity has the following properties:

Table 7-35 Entity Activity Properties

Property Name	Description
<i>Activity Id</i>	<p>Specify a unique string value that identifies the activity. Activity Ids are written to the user application's log file. Specifying a meaningful Activity Id makes it easier to understand the data written to the logs. You can specify letters, numbers, and the underscore (_) character.</p> <p>If you do not specify a value, the Activity Id defaults to <i>ActivityNN</i> where the <i>NN</i> represents the order in which the activity was added to the workflow.</p>
<i>Name</i>	Provides a name for the activity.
<i>Entity Type</i>	Specifies the target entity type: User or Group.
<i>Operation</i>	<p>Indicates what kind of operation will be performed on the target entity:</p> <ul style="list-style-type: none">♦ Create/Modify♦ Delete attributes/values♦ Delete entity <p>To create or modify attributes of an entity or to create a new entity, select <i>create/modify</i>. To delete attributes of an entity, select <i>delete</i>.</p> <p>To delete an entity, select <i>delete object</i>.</p>
<i>Set Workflow Status</i>	<p>Specifies the approval status of the provisioning request. Set to True for approved; otherwise, set to False. This method of setting workflow status overrides other methods. For example, the <i>Set Default Completion Status to Approved</i> parameter (see Table 4-3, “Overview Properties,” on page 97) or the <i>Approval Status</i> activity (see Section 7.8, “Workflow Status,” on page 238).</p>

7.19.2 Data Item Mapping

To bind the data items associated with the Entity activity, you define mappings for the attributes associated with the target entity type.

Table 7-36 Entity Activity Data Item Mappings

Setting	Description
Entity dn	<p>Identifies the entity that is the target of the operation. The default value is recipient.</p> <p>To create a new object, specify a distinguished name that does not yet exist.</p> <p>TIP: The output of the DNMaker control can be used as input for the Entity dn value. The DNMaker control constructs the DN by allowing the user to enter the naming attribute in a text field and presenting an interface for picking a container. After this data has been captured in a request form, the output can be mapped to a variable in the flowdata object. In the definition for the Entity activity, this flowdata variable can be accessed in the Entity dn setting with an expression such as</p> <pre>flowdata.get('groupdn');</pre> <p>For details on using the DNMaker control, see Section 5.5.11, “DNMaker,” on page 141.</p>
Modify Type	<p>Indicates how the mapping should be performed for an attribute. The choices are</p> <ul style="list-style-type: none">◆ Append Value◆ Replace Value◆ Replace All Values <p>For many attributes, <i>Replace Value</i> is the only option that makes sense; therefore, this option is selected automatically and cannot be changed.</p> <p>You must specify the <i>Modify Type</i> setting before specifying the <i>Modify Value Expression</i> setting.</p>

Setting	Description
Modify Value Expression	<p>Specifies a source expression for an attribute. When you click a cell in the <i>Modify Value Expression</i> column, the ECMA Expression Builder displays to help you define your expression. The list of attributes available varies depending on which entity type was selected on the Properties tab.</p> <p>Designer automatically inserts a sample ECMAScript expression into this field. The code provided varies depending on the <i>Operation</i> property specified in <i>Properties</i> and the <i>Modify Type</i> selected in <i>Data Item Mapping</i>. For example, if you have specified <i>Create/Modify</i> for <i>Operation</i>, and <i>Replace All Values</i> for <i>Modify Type</i>, Designer inserts an expression that helps you to create a vector:</p> <pre>function list() { v=new java.util.Vector(); v.add('{Enter Item 1}'); v.add('{Enter Item 2}'); return v; }; list();</pre> <p>In some cases you might be able to create expressions that work as well or better than the sample expression. For example, instead of creating a vector for multiple attribute values, you can create a flowdata variable (see Section 6.5.3, “Understanding Workflow Data,” on page 187) to store multiple attribute values, and use the getObject function to retrieve the values of the flowdata variable (see “ECMAScript Objects” on page 318).</p> <p>NOTE: The cells in the <i>Target Attribute</i> column are not editable.</p>

7.19.3 E-Mail Notification

Not supported with this activity.

7.19.4 Working with Entity Activities

You use Entity activities to update entities in the Identity Vault. The procedures for working with Entity activities differ slightly from the procedures for working with other activity types so this section includes example procedures for:

- ♦ [“Adding or Modifying an Entity” on page 264](#)
- ♦ [“Using an Entity Activity to Delete an Entity” on page 265](#)
- ♦ [“Using an Entity Activity to Delete an Attribute or Value” on page 265](#)

Adding or Modifying an Entity

- 1 From the Workflow page, click the Entity activity icon in the palette, then click the canvas to insert the Entity activity into the workflow.
- 2 Click the *Properties* tab.
- 3 Click in the *Value* column of the *Entity Type* field, then select the *Entity Type* (for example, User, Group) that you want to create or modify. If the target object that you specify in [Step 6](#) already exists, the target object is modified; if the target object doesn't exist, it is created.
- 4 Click in the *Value* column of the *Operation* field, then select *Create/Modify*.

- 5 Click the *Data Item Mapping* tab.
- 6 Click the button next to the *Entity dn* field to display the ECMA Expression Builder, then specify an expression that identifies the target of the operation (for example, “recipient”).
- 7 Click *OK* to return to the Data Item Mapping view.
- 8 Specify expressions for other attributes as required to create the Entity.
See [Section 3.2, “Working with Entities and Attributes,” on page 47](#) for information about adding entities. If you are adding an entity, you must enter expressions for all required attributes.

Using an Entity Activity to Delete an Entity

- 1 From the Workflow page, click the Entity activity icon in the palette, then click the canvas to insert the Entity Activity into the workflow.
- 2 Click the *Properties* tab.
- 3 Click in the *Value* column of the *Entity Type* field, then select the Entity Type (for example, User, Group) to which the entity that you want to delete belongs.
- 4 Click in the *Value* column of the *Operation* field, then select *Delete entity*.
- 5 Click the *Data Item Mapping* tab.
- 6 Click the button next to the *Entity dn* field to display the ECMA Expression Builder, then specify an expression that identifies the Entity that you want to delete.
- 7 Click *OK* to return to the Data Item Mapping view.

Using an Entity Activity to Delete an Attribute or Value

- 1 From the Workflow page, click the Entity activity icon in the palette, then click the canvas to insert the Entity activity into the workflow.
- 2 Click the *Properties* tab.
- 3 Click in the *Value* column of the *Entity Type* field, and select the Entity Type (for example, User, Group) of the entity to which the attribute or value that you want to delete belongs.
- 4 Click in the *Value* column of the *Operation* field, and select *Delete attribute/value*.
- 5 Click the *Data Item Mapping* tab.
- 6 Click the button next to the *Entity dn* field to display the ECMA Expression Builder, then specify an expression that identifies the entity that contains the attribute or value that you want to delete.
- 7 Click *OK* to return to the Data Item Mapping view.
- 8 Click in the *Delete Type* field for the attribute to which you want the operation to apply, then select the operation from the list:
 - ♦ Select *Delete Attribute* for single-value attributes
 - ♦ Select either *Delete Attribute* or *Delete Value* for multi-value attributes. Selecting *Delete Value* for multi-value attributes also requires that you enter an expression to identify the value that you want to delete.
- 9 To delete a value, click in the *Delete Value Expression* field for the attribute to which you want the operation to apply, then specify an expression that resolves to the value of the attribute that you want to delete.

8 Working with Integration Activities

This section provides details about working with Integration activities. Topics include:

- ♦ [Section 8.1, “About the Integration Activity,” on page 267](#)
- ♦ [Section 8.2, “Adding an Integration Activity,” on page 267](#)
- ♦ [Section 8.3, “Moving Data to and from the Integration Activity,” on page 269](#)
- ♦ [Section 8.4, “Using the Integration Activity Editor Interface,” on page 272](#)
- ♦ [Section 8.5, “Actions,” on page 285](#)

8.1 About the Integration Activity

The Integration activity is an activity that allows workflows to exchange data with arbitrary Web services. Data sent to a Web service can integrate an individual workflow with other systems, inside and outside the organization. Data received from a Web service can provide decision support information on approval forms.

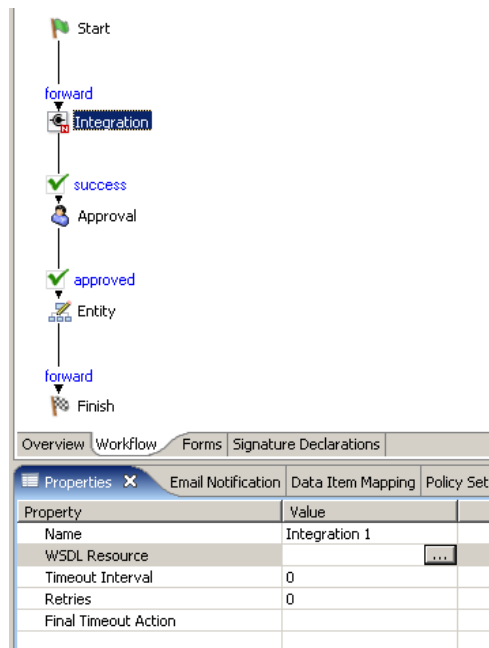
You create flowdata variables to move data from the workflow to the Web service for processing. The Integration activity automatically creates an action model for working with a Web service based on a WSDL document that you specify.

NOTE: The action model is a subset of the features available in the Novell Integration Manager product (formerly known as Novell exteNd Composer).

An action model is a visual representation of a set of instructions for processing XML documents and communicating with XML data sources. An action model performs all data mapping, data transformation, and data transfer within an Integration activity. You can edit the action model to manipulate data before and after the data is submitted to the Web service. You then map the data from the Integration activity back to flowdata variables for use in the workflow.


8.2 Adding an Integration Activity

- 1 Create a provisioning request definition (see [Chapter 4, “Configuring Provisioning Request Definitions,” on page 83](#)).
- 2 Create a workflow for the provisioning request definition (see [Chapter 6, “Creating the Workflow for a Provisioning Request Definition,” on page 173](#)).
- 3 Click the *Workflow* tab.
- 4 Drag an Integration activity from the palette and place it in the desired location in the workflow.
- 5 Click the *Properties* tab.



- 6 Type a name for the activity in the *Name* field.
- 7 Click the *Value* field for the *WSDL Resource* property, then click the browse button to display a dialog box that you use to locate the WSDL file for the Web service that you want to access with the Integration activity.
- 8 Use the dialog box to browse your file system to locate the WSDL file for the Web service that you want to use. Click the name of the WSDL file, then click *Open*.

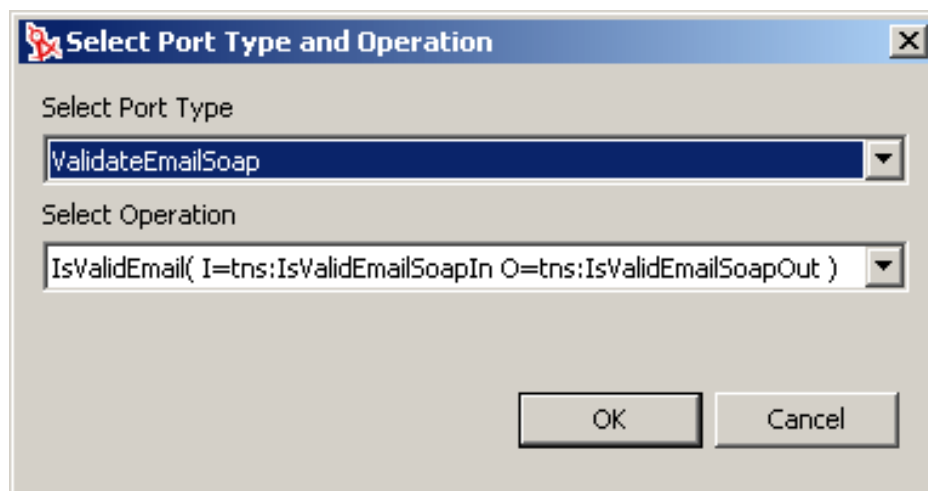A dialog box that you use to select a port type and operation for the Web service is displayed.



The *Select Port Type* list includes a set of port types supported by the Web service. Each port type supports operations that include the input and output messages of the operation.


This window allows you to specify the SOAP endpoint, the user ID used to access the SOAP endpoint, and the password used to access the SOAP endpoint. These options are all ECMAScript expressions and can be GCV values. Use the ECMA Expression Builder to configure the expressions you want to use.

- 9 Select a port type from the *Select Port Type* list.

- 10 Select an operation from the *Select Operation* list.
- 11 *If you want to specify a SOAP endpoint*, specify a SOAP endpoint URL, either by selecting the URL from the *Select Soap Service Endpoint Expression* list or by clicking the “E” icon and using the ECMA Expression Builder to configure an expression that resolves to the SOAP endpoint URL.
- 12 *If you want to use basic authentication for a SOAP endpoint*, complete the following steps:
 - 12a Select *SOAP Service requires Basic Authentication*.
 - 12b In the *User ID Expression* field, click the “E” icon and use the ECMA Expression Builder to specify an expression that resolves to the user ID used to access the SOAP endpoint.
 - 12c In the *Password Expression* field, click the “E” icon and use the ECMA Expression Builder to specify an expression that resolves to the password used to access the SOAP endpoint.
- 13 Click *OK*.

The Integration activity creates an action model based on the WSDL document. You use the action model at design time to test the input to the Web service, test the response from the Web service, and map and transform data, if necessary, before returning the data to the workflow.

For many Web services, you don’t need to concern yourself with the action model. You simply create data item mappings for the Integration activity. After the action model is created, a new tab, *Integration*, is added to the provisioning request definition editor. You use this tab to access the action model.
- 14 Specify the *Timeout*, *Retry Count*, and *Final Timeout Action* properties (see [Section 7.17, “Integration Activity,”](#) on page 258).
- 15 If you want to view or edit the action model, click the *Integration* tab.



8.3 Moving Data to and from the Integration Activity

- 1 Create form fields to allow users to provide input to the Web service accessed by the Integration activity (see [Chapter 5, “Creating Forms for a Provisioning Request Definition,”](#) on page 107). For example, if you are working with a Web service that provides stock quotes, you need a field for the user to specify a stock symbol.
- 2 To move user input from the form to the workflow, create a flowdata variable in an activity that precedes the Integration activity in the workflow.

See [Section 6.5.3, “Understanding Workflow Data,”](#) on page 187 for information about creating flowdata variables.

For example, if you have created a form field called “symbol” to accept a stock symbol for input to the Web service, you would go to the post-activity data item mapping for the activity associated with the form that contains the *symbol* field, then you would map the *symbol* field to a flowdata variable (for example, flowdata.symbol).
- 3 In the *Workflow* tab, right-click the icon for the Integration activity, then choose *Show Data Item Mapping*.

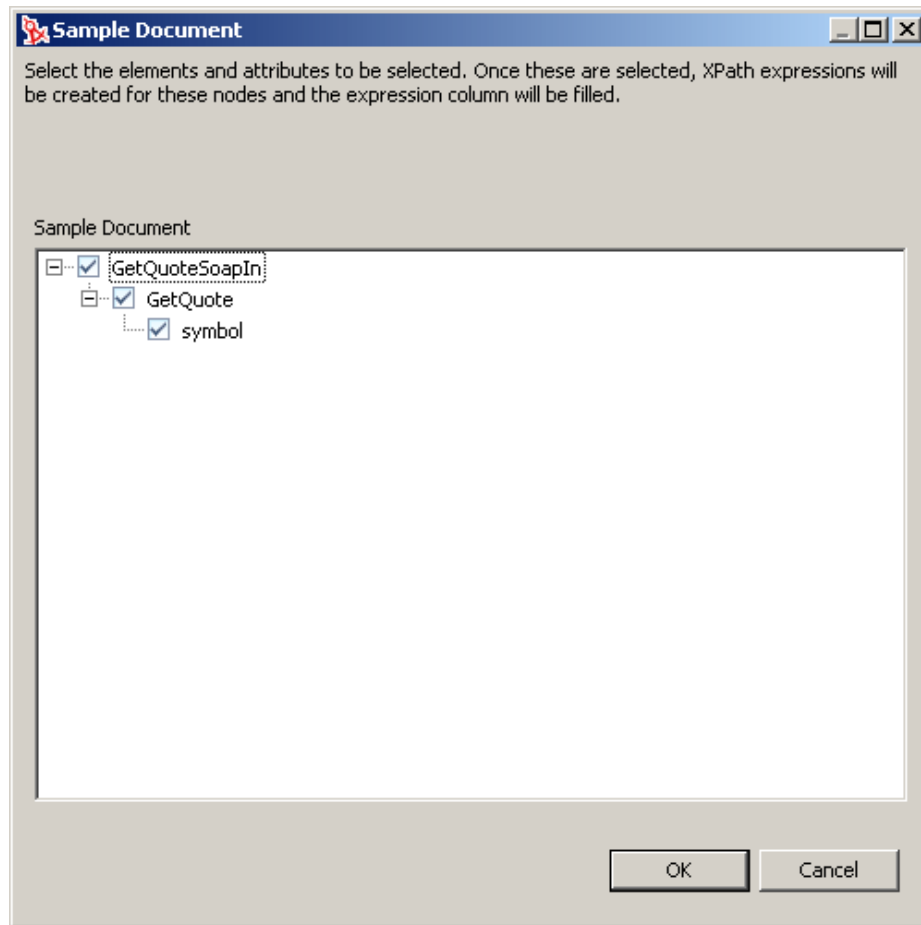
The *Data Item Mapping* tab is displayed.
- 4 In the *Data Item Mapping* view, click *Pre-Activity*.

In the *Web Service Input Field* grid, you should see fields that match all of the input fields associated with the port type and operation specified in [Step 9](#) and [Step 10](#) on page 269.

The integration activity automatically selects all of the input field associated with the port type and operation. You can remove the input fields or modify properties of the input fields by following this procedure:


4a Click *Mapping*.

The *Sample Document* dialog box is displayed.




4b Expand the nodes of the sample document and deselect any input fields that you want to remove.

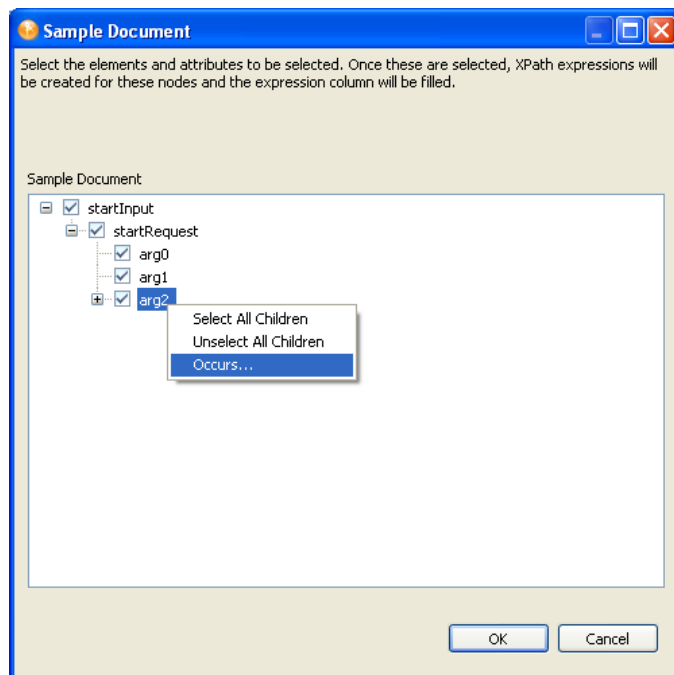4c If an input field is an unbounded element, right-click and select *Occurs*.




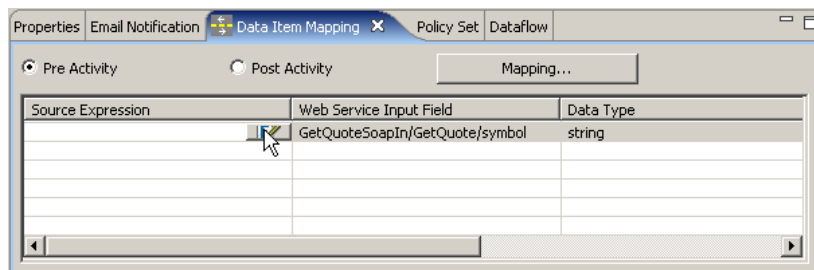- 4d Type the maximum number in the *Enter Repeats* dialog, and click *OK*
- 4e Click *OK* to return to the *Data Item Mapping* view.
- 5 For each *Web Service Input Field*, click in the *Source Expression* field, then click the *ECMA Expression Builder* button.



The *ECMA Expression Builder* is displayed.

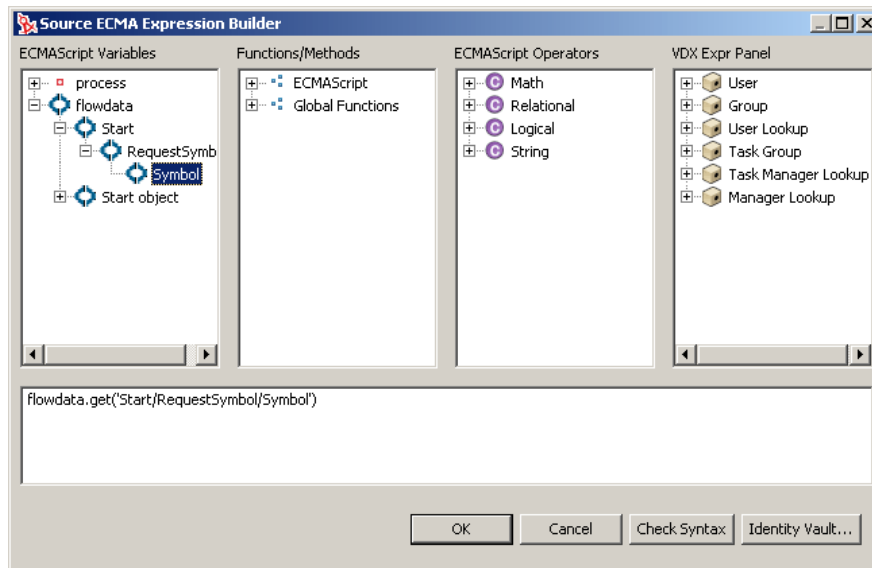- 6 Expand the *flowdata* node in the *ECMAScript Objects* pane of the *ECMA Expression Builder*, then double-click the *flowdata* variable for the user input to the *Web service*.



7 Click *OK* to return to the *Data Item Mapping* view.

8 Click *Post Activity*.

In the *Web Service Output Field* grid, you should see fields that match all of the output fields associated with the port type and operation specified in [Step 9](#) and [Step 10](#) on page 269.

9 The Integration activity automatically selects all of the output fields associated with the port type and operation. If you want to remove some of the output fields, follow these steps:

9a Click *Mapping*.

The *Sample Document* dialog box is displayed.

9b Expand the nodes of the sample document and deselect any attributes that you want to remove.

9c Click *OK* to return to the *Data Item Mapping* view.

10 Click *Map All* to automatically create flowdata variables for each *Web Service Output Field*.

Alternatively, for each *Web Service Output Field*, click in the *Source Expression* field, then click the ECMA Expression Builder button.

11 Expand the *flowdata* node in the *ECMAScript Objects* pane of the ECMA Expression Builder, then double-click the flowdata variable that will receive data from the Web service.


12 Click *OK* to close the ECMA Expression Builder.

Now you can work in the Integration view to test and refine the interaction with the Web service.

8.4 Using the Integration Activity Editor Interface

The Integration activity editor provides a working environment for the input, output, and actions of the Integration activity. The Integration activity editor is composed of three views: Action Model, WSDL Editor, and Messages.

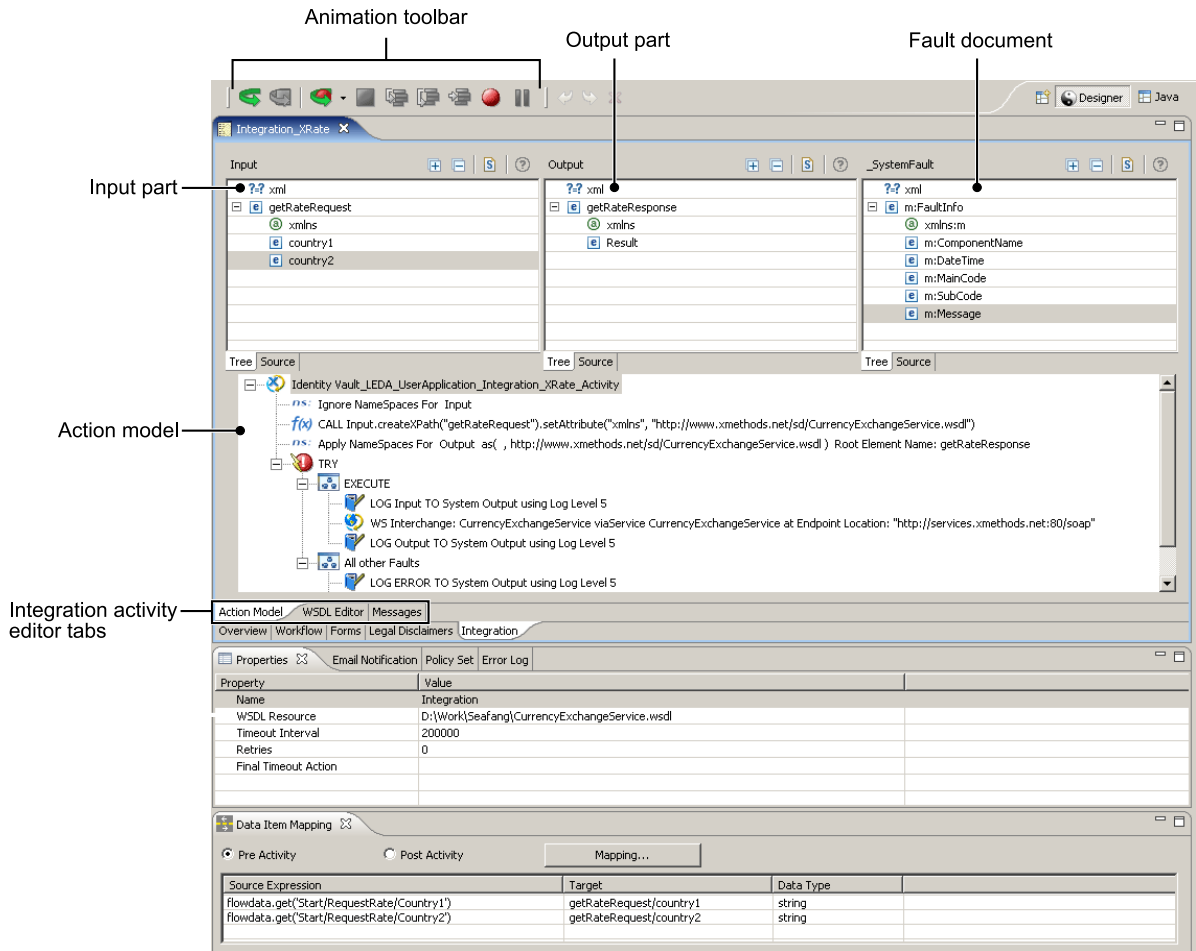Figure 8-1 Integration Activity Interface



- ◆ [Section 8.4.1, “XML Views,” on page 273](#)
- ◆ [Section 8.4.2, “Action Model,” on page 278](#)
- ◆ [Section 8.4.3, “WSDL Editor,” on page 284](#)
- ◆ [Section 8.4.4, “Messages,” on page 284](#)
- ◆ [Section 8.4.5, “Regenerating Code for the Action Model,” on page 285](#)
- ◆ [Section 8.4.6, “Adding Actions to the Action Model,” on page 285](#)

8.4.1 XML Views


The Integration activity provides a number of XML views (for example, Input and Output messages, WSDL Editor, Messages) derived from the WSDL document. These views use a common interface.

- ◆ [“Tree View” on page 273](#)
- ◆ [“Source View” on page 277](#)

Tree View

You use the Tree view to work with a hierarchical view of an XML document. You display the Tree view by clicking the *Tree* tab.

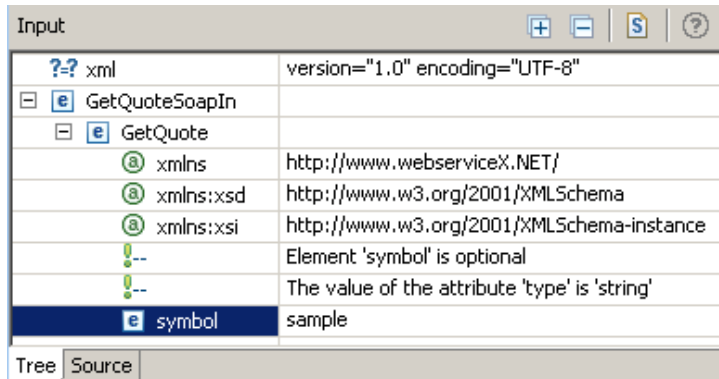Figure 8-2 Tree View



- ◆ “Tree View Editing Features” on page 274
- ◆ “Tree View Menu” on page 274
- ◆ “Tree View Toolbar” on page 275
- ◆ “Attaching a Schema or DTD” on page 275

Tree View Editing Features

The Tree view provides the following editing features:

- ◆ You can edit attribute values, attribute name, namespace names and values, text, and comments.
- ◆ You can insert new nodes by using the menu that is displayed when you right-click within the Tree view. The menu allows you to insert nodes as children before or after the selected node. If the node is an element, you can insert attributes. The submenus for *Add Child*, *Add After*, and *Add Before* contain the node that can be legally added. If no schema or DTD is associated with the document, the submenus contain *New Attribute* or *New Element*.
- ◆ You can delete a node by right-clicking a node and selecting *Remove*.
- ◆ You can drag and drop items between Tree views (for example, between views of the Input and Output messages) to create Map actions (see [Section 8.5.8, “Map,” on page 307](#) for information about Map actions).
- ◆ You can undo, redo, cut, copy, and paste.

Tree View Menu

When you right-click an item in the Tree view, a menu is displayed that you use to perform operations on the XML document. The menu is context-sensitive and only displays the commands that are appropriate for the item you clicked.





Table 8-1 Tree View Menu

Item	Description
Remove	Removes the selected item.
Add DTD Information	Displays a dialog box that you use to add DTD information. You can edit the <i>Root Element Name</i> , <i>Public ID</i> , and <i>System ID</i> .
Edit Namespaces	Displays a dialog box that you use to add namespace declarations.
Add Attribute	Displays a dialog box that you use to define a new attribute.
Add Child	Displays a submenu with the following options:
Add Before	Comment
Add After	Add Processing Instruction #PCDATA CDATA Section New Element
Replace with	Replaces the selected item with an item selected from the menu.

Tree View Toolbar

Tree view toolbars provide the following features:


Table 8-2 Tree View Toolbar

Button	Description
	Expands all nodes in the document.
	Collapses all nodes in the document.
	Attaches a schema or DTD (see “Attaching a Schema or DTD” on page 275).
	Displays online help.


Attaching a Schema or DTD

You can attach a schema or DTD to the current XML document when you are using the Tree view.

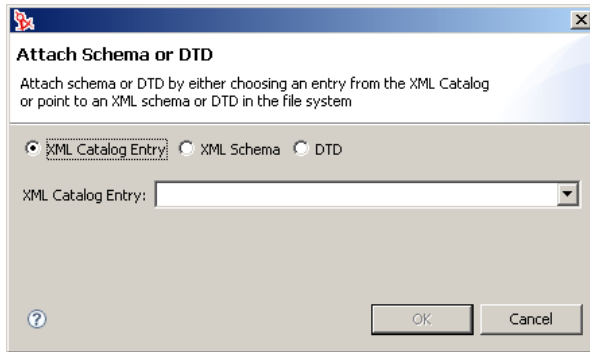
- 1 Click  in the Tree view toolbar. The *Attach Schemas or DTD* dialog box is displayed.



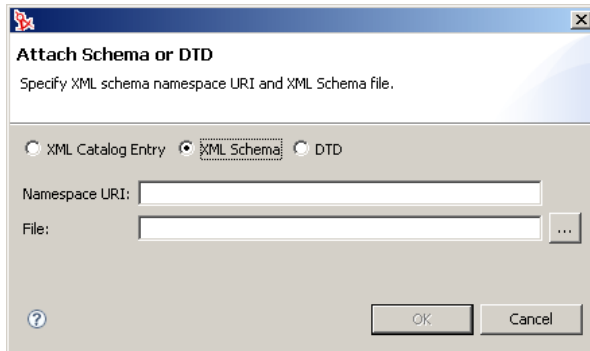- 2 To choose from a list of entries in the XML catalog, choose an entry from *XML Catalog Entry* list.
- 3 To specify an XML schema on disk, click *XML Schema*.



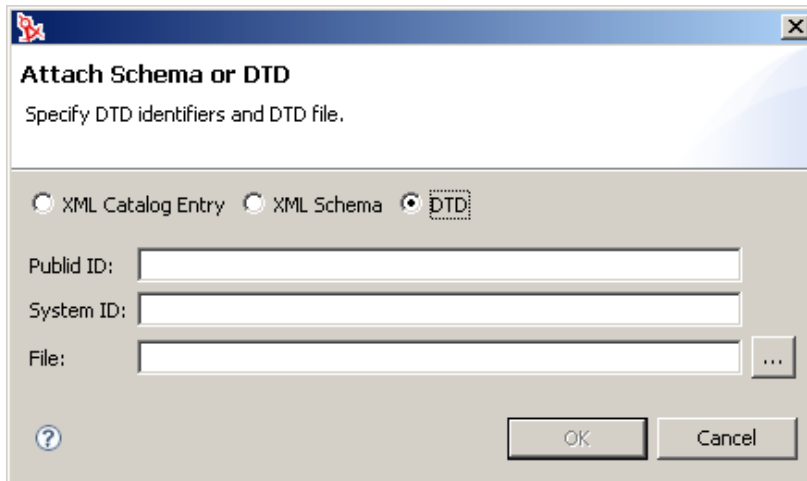- 4 Type a *Namespace URI*, then use the browse button in the *File* field to select an XML schema on disk.
- 5 To specify a DTD on disk, click *DTD*.




- 6 Type a *Public ID* and *System ID*, then use the browse button in the *File* field to select the DTD file on disk.

Source View

You use the Source view to view the XML source of the document. You display the Source view by clicking the *Source* tab.

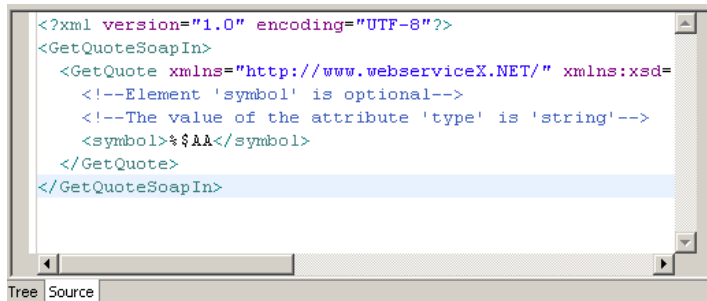Figure 8-3 Source View



- ◆ [“Source View Features” on page 277](#)
- ◆ [“Source View Menu” on page 277](#)

Source View Features

The source view supports the following features:

- ◆ Syntax highlighting.
- ◆ Context-sensitive code-completion based on DTD or XML Schema.
- ◆ Validation as you type. If the XML is invalid (for example, the closing bracket is omitted from a tag), the editor indicates the error.
- ◆ General text editing operations such as undo, redo, cut, copy, paste, and select all.

Source View Menu

When you right-click an item in the Source view, a menu is displayed that you use to perform operations on the XML document.

Table 8-3 Source View Menu

Item	Description
<i>Undo</i>	Reverses the last action.
<i>Redo</i>	Reverses an undo operation.
<i>Cut</i>	Cuts the selected text to the clipboard.
<i>Copy</i>	Copies the selected text to the clipboard.
<i>Paste</i>	Pastes the clipboard contents at the insertion point.
<i>Delete</i>	Deletes the selected text.
<i>Select All</i>	Selects all of the text in the document.
<i>Find</i>	Displays a dialog box that you use to find and replace text within the document.

8.4.2 Action Model

The action model includes the Action Model view and views for displaying message parts. The Action Model view displays actions that operate on the contents of the message parts. The message parts display the XML for the Web service Input and Output messages.

- ♦ [“About the Action Model Views” on page 278](#)
- ♦ [“About the Input View” on page 278](#)
- ♦ [“About the Output View” on page 279](#)
- ♦ [“About the _SystemFault View” on page 279](#)
- ♦ [“About the Action Model Pane” on page 280](#)
- ♦ [“Animation” on page 281](#)

About the Action Model Views


The action model views are used at design time to test the interaction with the Web service. You edit actions in the Action Model view. You can enter test data to be input to the Web service in the Input view, examine the response from the Web service in the Output view, and see any error messages returned from the Web service in the _SystemFault view. The Integration activity has the following message panes:

- ♦ Input view
- ♦ Output view
- ♦ _SystemFault view
- ♦ Action Model view

About the Input View

The Input view displays the input message derived from the WSDL document for the Web service. You can resize the view by dragging the right border. You can resize columns within the view by dragging the column border. You can specify a value to use in testing the action model directly in the Input part, in which case the value is discarded after executing the action model. You can also specify a value using the *Messages* tab (see [Section 8.4.4, “Messages,” on page 284](#)), in which case the value persists until you delete the value or you regenerate the action model (see [Section 8.4.5, “Regenerating Code for the Action Model,” on page 285](#)).

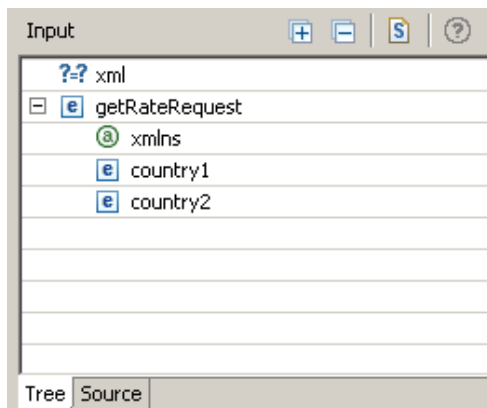Figure 8-4 *Input View*




About the Output View

The Output view displays the output message derived from the WSDL document for the Web service. When you execute the action model, you use the Output view to view the values returned from the Web service.

You can resize the view by dragging the left border. You can resize columns within the view by dragging the column border. You can specify a value directly in the Output part for modeling purposes, in which case the value is discarded after executing the action model. You can also specify a value by using the *Messages* tab (see [Section 8.4.4, “Messages,”](#) on page 284), in which case the value persists until you delete the value.

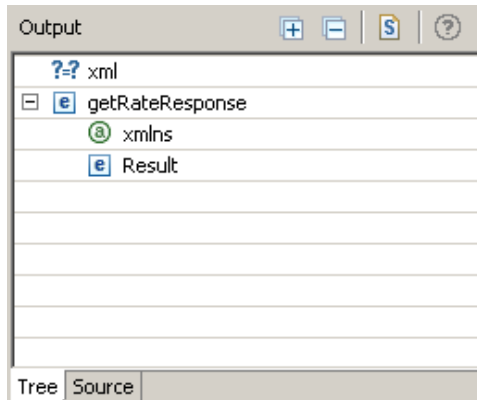
Figure 8-5 Output View



About the _SystemFault View

The `_SystemFault` view displays any error messages produced when you execute the action model. The XML information contained in `_SystemFault` is also written to a global object called `ERROR`.

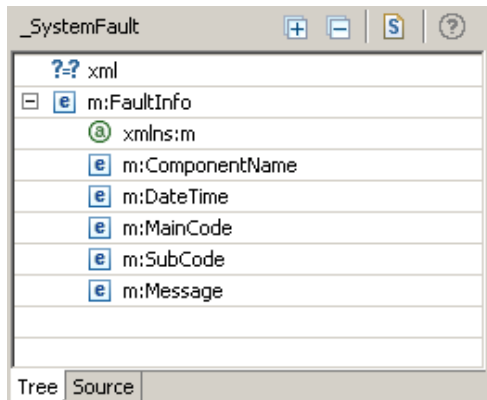Figure 8-6 `_SystemFault` View



Beneath the `FaultInfo` root are the following elements:

- ♦ *DateTime* contains the Date and Time at which the fault occurred.
- ♦ *ComponentName* contains the name of the component that threw the fault.
- ♦ *MainCode* contains the main code number for the error.

- ♦ *SubCode* contains a sub-code number for the error.
- ♦ Message contains the error message defined when you set up a Throw Fault action (see [“Throw Fault” on page 288](#)). If you do not specify an error message in your Throw Fault action, the following message is displayed: "A user-defined Fault occurred!". If the error occurred within a Try/On Fault action, and you did not specify a Fault, this element is populated with an Exception message.

About the Action Model Pane


The Integration activity has a single action model. The action model represents the mappings, transformations, and other actions that is performed on the Web service input and output messages. The Action Model view is resizable. Most of your activity that takes place in the Action Model view involves adding and editing actions.

- ♦ [“Action Model Context Menu” on page 280](#)
- ♦ [“Finding and Replacing Text in the Action Model” on page 280](#)

Action Model Context Menu

If you right-click in the action model, a menu is displayed.

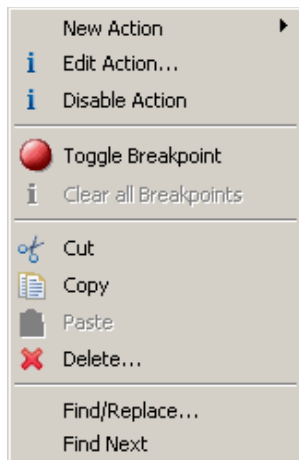Figure 8-7 Action Model Menu




From this menu, you can add or edit actions (see [Section 8.5, “Actions,” on page 285](#)), toggle breakpoints in the action model (see [“Animation” on page 281](#)) and perform other tasks.

Finding and Replacing Text in the Action Model

You can replace a word or string by using the *Replace* command on the action model menu.

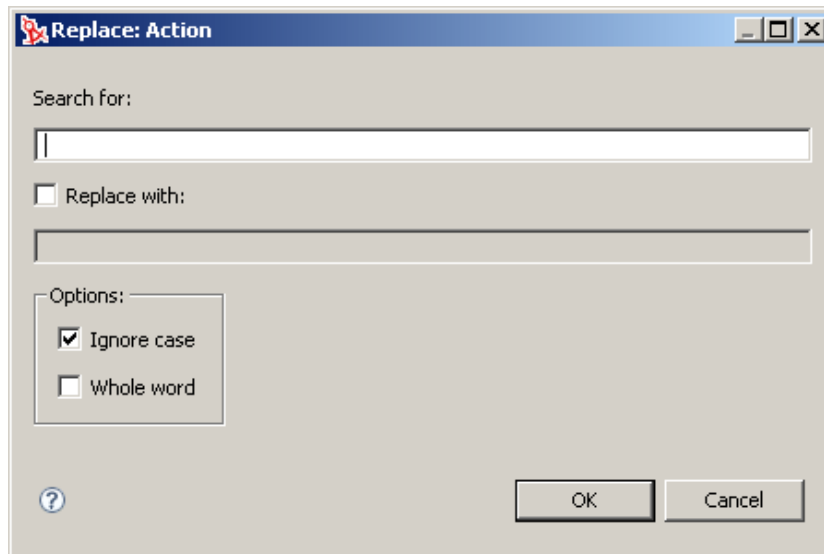- 1 Right-click in the action model, then select *Replace*.



- 2 Specify the search text.
- 3 If you want to replace the search text, click *Replace with*, then type a string to replace the search string.
- 4 If you want to find the search text regardless of the capitalization of the text, click *Ignore case*.
- 5 If you want to find the search text in whole words only, click *Whole word*.
- 6 Click *OK*

The Integration activity finds the first occurrence of the search text. If the operation is a find and replace operation, the Integration activity asks you to confirm the replacement. You can then replace the next or all occurrences of the search text.

Animation

The action model provides animation tools that you can use to test and troubleshoot actions interactively within the Integration activity. You can execute the action model step by step and watch the result of each action. Not only do you see any errors as they happen, but you can verify, in real time, that connections and data behaved as you planned.

The animation tools allow you to toggle one or more breakpoints. You can use this feature to concentrate on a particular section of an action model. When used in conjunction with the run-to-breakpoint tool, breakpoints allow you to quickly run through action model sections that work properly, coming to a stop at a particular action. From there, you can step through each action in sequence. You can also step over loops and other code blocks that would otherwise be tedious to execute step-by-step.










The Basic Animation Tools

The animation tools are available on the Designer toolbar.

Figure 8-8 Animation Toolbar



Table 8-4 Animation Tools

Animation Toolbar Button	Name	Description
	<i>Execute</i>	Executes the action model.
	<i>Execute Current Action</i>	Executes the currently selected action.
	<i>Start Animation</i>	Starts the animation process. Enables <i>Step Into</i> , <i>Step Over</i> , and <i>Run to Breakpoint/End</i> .
	<i>End Animation</i>	Stops the animation process.
	<i>Step Into</i>	<p>Executes the currently selected action and highlights the next sequential action.</p> <p>For a Repeat Loop action, clicking <i>Step Into</i> executes each action in the loop and iterates through each loop.</p> <p>For a Decision Action, <i>Step Into</i> processes the next action in the True or False branch.</p> <p>For the Try/On Fault action, <i>Step Into</i> processes the next action inside the execute branch, and possibly the On Fault branch.</p>
	<i>Step Over</i>	Executes the currently selected action and highlights the next sequential action. Unlike the Step Into button, clicking this button does not highlight and execute the details of Repeat, Decision, or Try/On Fault actions.
	<i>Run To Breakpoint/End</i>	Runs the animation to the next breakpoint or to the end of the action model if there are no breakpoints.
	<i>Toggle Breakpoint</i>	Sets the selected action in the action model as a breakpoint. You may set more than one breakpoint. Another way to toggle a breakpoint is to right-click the desired action and select <i>Toggle Breakpoint</i> from the menu.
	<i>Pause Animation</i>	Pauses the animation.

Starting Animation

When you first open an Integration activity, *Start Animation* and *Toggle Breakpoint* are the only enabled buttons. When you click *Start Animation*, the rest of the animation buttons are enabled. If you want to halt the animation temporarily, you can use the *Pause Animation* button. If you want to abort the animation, you can do so at any time by clicking *End Animation*.

Although Copy, Paste, and action editing operations (including adding new actions) are all available at animation time, we recommend that you do not edit the action model during animation. If you do, exceptions or unpredictable behavior can occur. If you need to edit the action model, use *End Animation* to stop the animation first. Then apply your edits and begin the animation again.

- 1 Open an Integration activity.
- 2 Click *Start Animation* button in the Designer toolbar. All of the animation buttons become active except the Start Animation button, which is now dimmed.
- 3 Follow the instructions in the following sections to perform the desired Animation activity.

Toggling a Breakpoint

You use the Toggle Breakpoint tool to set a breakpoint in the action model where you want the animation process to stop. This is helpful if you have a lengthy action model with long sections that work properly. You can set the breakpoints for each action that is causing a problem and then step through the action to troubleshoot it.

- 1 In the Action pane, select the action for which you want to set a breakpoint. This is where the animation will stop.
- 2 Click *Toggle Breakpoint* on the Designer tool bar, or right-click the action and select *Toggle Breakpoint*. A dot appears in the left border of the action model to indicate the breakpoint.
- 3 If desired, repeat the previous steps to select additional breakpoints.

Stepping Into an Action

Step Into runs the selected action in the action model and then moves to the next action in the sequence. You can use the *Step Into* tool to step through each action in the entire action model, or you can use it in conjunction with the Run to Breakpoint tool. Execution stops at the next breakpoint or when the action model ends, whichever comes first.

A possible scenario for using a breakpoint would be if you have ten actions that you know work properly but have doubts about the eleventh. You could set the eleventh action as a breakpoint, execute the Run to Breakpoint tool, and then step through the eleventh (and subsequent) actions by executing the *Step Into* tool.

- 1 Start the animation (see [“Starting Animation” on page 283](#)).
- 2 Click *Step Into*. The first action in the action model is selected.
- 3 Click *Step Into* again. The selected action executes and the next action is selected.
- 4 Continue to work through the action model by clicking *Step Into* after each action executes and the subsequent action is selected.

Stepping Over an Action

You use *Step Over* when you don't want to step into the details of the Repeat, Decision, or Try/On Fault actions. You can execute an entire block of code without stepping individually through each action.

You can use *Step Over* in conjunction with Run to Breakpoint. For example, you can toggle a Breakpoint, execute Run to Breakpoint, and then use *Step Over* to execute the action designated as the breakpoint. *Step Over* can save a great deal of time when testing lengthy action models, because you can avoid tediously stepping through individual actions.

- 1 Start the animation (see [“Starting Animation” on page 283](#)).
- 2 Step through the action model with *Step Into* until you reach a loop or other line of code that precedes an indented code block.
- 3 Click *Step Over*. The first action after the block of indented code is selected. All of the indented code executes normally and you are taken straight to the next block of actions, without stepping through the indented actions.
- 4 Continue to work through the action model by clicking *Step Over* as needed.
- 5 Continue to click *Step Into* and *StepOver* to execute all of the actions in the action model.

Pausing Animation

You use *Pause Animation* to pause the execution of an action in the action model. This is especially helpful in cases in which the action model contains lengthy loops.

- 1 During the execution of an action, click *Pause Animation*.
- 2 To resume the animation process, click *Step Into*, *Step Over*, or *Run to Breakpoint* (if a breakpoint has been set).

Aborting Animation

You use *Stop Animation* to stop the animation process. After you stop the animation, you cannot restart from the place where you left off. You must restart from the beginning of the action model.

8.4.3 WSDL Editor

The WSDL Editor displays the WSDL document for the Web service. You can edit the WSDL by using the Tree view and Source view editing features (see [“Tree View” on page 273](#) and [“Source View” on page 277](#)).

8.4.4 Messages

The Messages view displays the messages derived from the WSDL document for the Web service. You can edit the messages using the Tree view and Source view editing features (see [“Tree View” on page 273](#) and [“Source View” on page 277](#)). You can use this feature for entering test data that is used when you execute the action model at design time. Data that you enter in the Messages view persists across executions of the action model.

8.4.5 Regenerating Code for the Action Model

When working in the WSDL Editor view, you can regenerate all code for the action model and regenerate messages by clicking the *Regenerate* button. When working in the Messages view, you can regenerate all actions in the action model. The *Regenerate* button is located in the Designer toolbar:

Figure 8-9 *Regenerate Button*



8.4.6 Adding Actions to the Action Model

Actions are the processing steps that take place within the Integration activity. A collection of actions is referred to as an action model. An action in the action model is displayed as a line and contains an icon for the action type along with an abbreviated definition of the action. Some actions are subordinate to other actions. For example, you can create a Repeat action that controls loop processing, then add actions inside the loop. The actions inside the loop are subordinate to the Repeat action and appear indented beneath the Repeat action. Subordinate actions process as long as the Repeat action is True.

To add an action to the action model, click the line in the action model that is one line above the position in which you want to insert an action. Add an action by using any of following methods. The new action is inserted below the line you selected.

- ♦ Drag and drop. You can add Map actions by dragging and dropping elements from the *Input* view to the *Output* view.
- ♦ Copy and Paste. You can copy an action in the *Action Model* view and paste it somewhere else in the view.
- ♦ Right-click the line in the action model that is one line above the position in which you want to add the action, then select the desired action from the menu.

NOTE: You can reorder actions in the action model by dragging actions to a new position within the action model.

After you have created the action model, and before you , you should test the action model. Perform testing by using the Animation tools. With the Animation tools, you can set breakpoints, start an animation, step into and over actions, and pause the animation. See [“Animation” on page 281](#).

8.5 Actions

This section describes the actions that are available for use within an action model. An action is similar to a programming statement in that it takes input in the form of parameters and performs specific tasks. An action model is a set of instructions for processing XML documents and

communicating with XML data sources. An action model performs all data mapping, data transformation, and data transfer within an Integration activity. All actions within an action model work together.

At runtime, every action is converted to an executable form of ECMAScript and processed. At design time, many actions accept ECMAScript expressions as parameters, adding great flexibility and control to the action model. The Function action provides you with the most flexibility and control by giving you access to the full functionality of the ECMAScript language.

This section contains the following topics:

- ♦ [Section 8.5.1, “Advanced,” on page 286](#)
- ♦ [Section 8.5.2, “Data Exchange,” on page 291](#)
- ♦ [Section 8.5.3, “Repeat,” on page 296](#)
- ♦ [Section 8.5.4, “Comment,” on page 303](#)
- ♦ [Section 8.5.5, “Decision,” on page 304](#)
- ♦ [Section 8.5.6, “Function,” on page 305](#)
- ♦ [Section 8.5.7, “Log,” on page 306](#)
- ♦ [Section 8.5.8, “Map,” on page 307](#)

8.5.1 Advanced

This section includes descriptions of the following actions:

- ♦ [“Apply Namespaces” on page 286](#)
- ♦ [“Throw Fault” on page 288](#)
- ♦ [“Try/On Fault” on page 290](#)

Apply Namespaces

This section includes the following topics:

- ♦ [“About the Apply Namespaces Action” on page 286](#)
- ♦ [“Creating an Apply Namespaces Action” on page 287](#)

About the Apply Namespaces Action

Ideally, an Integration activity always receives valid XML documents (that is, the documents validate against their schema, map and transform data appropriately, and send valid XML documents). However, this might not always be the case. In other cases you might want to ignore namespaces altogether. It is important to have some means of validating XML documents. These and many other XML processing cases require a method of modifying or overriding the prefix and namespace handling provided by the Integration activity.

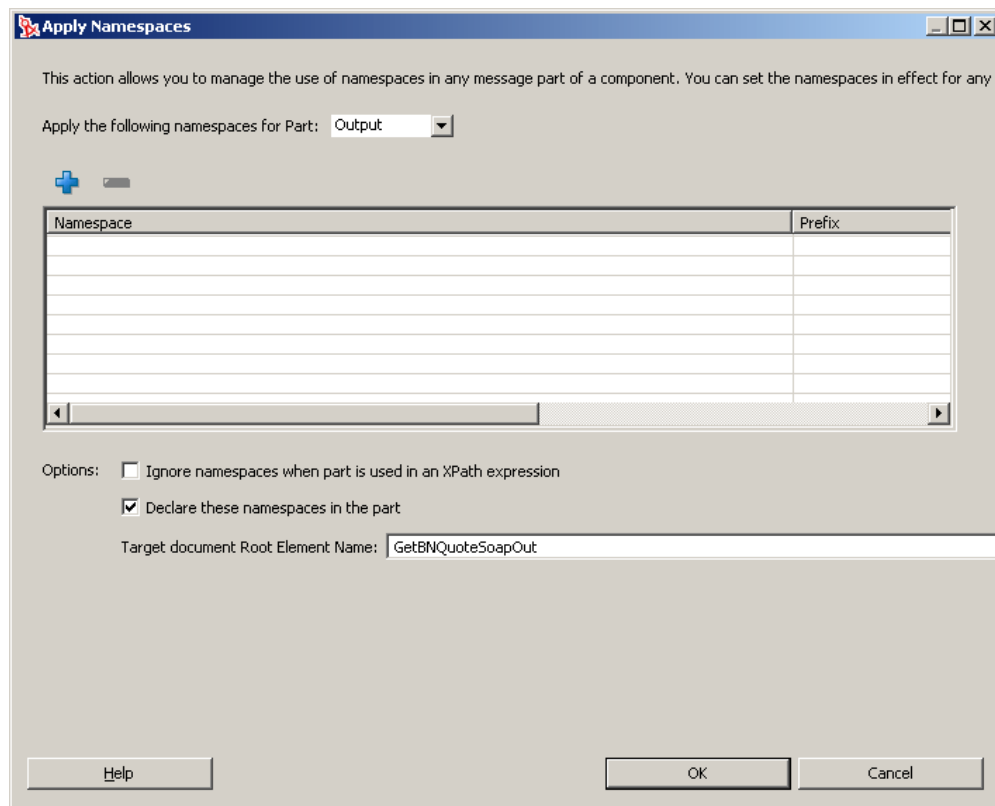
The Apply Namespaces action provides a mechanism for managing namespaces and namespace prefixes in effect for input and output messages within an action model. The action allows you to consolidate namespace and prefix declarations for a Web service in one place, to override those declared in the input and output messages, or to ignore namespaces altogether.

The Apply Namespaces action can be applied to input and output messages. You can also have multiple Apply Namespaces actions for an individual message part, effectively changing namespaces based on conditions specified in the action model. The namespaces declared are in effect until the end of the action model is reached or another Apply Namespaces action is executed. In other words, only the most recent Apply Namespaces action is in effect.

When creating a new Integration activity, an Apply Namespaces action is created automatically for the Output message if the WSDL declares any namespaces. After component creation, you can manually create additional Apply Namespaces actions.

Creating an Apply Namespaces Action

- 1 Right-click the line in the action model that is one line above the position in which you want to place the Apply Namespaces action (the new action is inserted below the line that you selected).
- 2 Select *New Action > Advanced > Apply Namespaces*.



- 3 Select the message (Input, Output, _SystemFault, or Project) to which you want to apply the namespace from the *Apply the following namespaces for Part* list.
- 4 Click the plus (+) icon to add a new row, then click the *Namespace* column and type a namespace URI.

The table displays all the Namespace declarations for the selected message part. After creating a new Apply Namespaces action, the table might or might not contain a list of declarations for a selected part. The list of declarations is initially constructed from the declarations defined in the WSDL.

Within the declaration list for a message part, prefixes must be unique. However, you can have duplicate namespace URIs if the URIs have unique prefixes. This allows you to declare multiple prefixes that are associated with the same namespace URI.

- 5 If desired, click *Ignore Namespaces when document is used in an XPath expression*.

Use this option when you want Map action source XPath expressions to find elements by their XML local name only.

This provides for a less restrictive method of specifying Map actions (see [Section 8.5.8, “Map,” on page 307](#)) and is useful when Map actions contain the wrong prefix or no prefix in their Source specifications. This allows you to place the Apply Namespaces action inside a Decision action (see [Section 8.5.5, “Decision,” on page 304](#)) that tests whether the Input message contains prefixes or not, yet still have one set of Map actions to map the input to another part. In other words, the Integration activity normally expects the input to contain prefixes, so you design all your Map actions with prefix names. For the occasional input that has no prefixes, the Decision action activates the Apply Namespaces action defined to ignore namespaces for input, allowing the Map actions to work in either case.

- 6 When you want to declare a set of namespaces in the root element of an output message built by your action model, click *Declare these namespaces in the part*.

This option is almost always checked for output to ensure that prefixed elements created in the output, as a result of Map actions, resolves to the proper namespaces.

This allows a recipient of the output to validate the document properly. The Apply Namespaces action with this option checked could also be used to add new declarations to an existing document that already contains declarations.

The *Target document Root Element Name* is used to specify the name of the root element to contain the Namespace declaration attributes. The Integration Activity automatically fills in this value based on the information in the WSDL document and the message part specified in the *Apply the following namespaces* for Part list.

- 7 Click *OK*. The new action is added to the action model.

Throw Fault

This section includes the following topics:

- ♦ [“About the Throw Fault Action” on page 288](#)
- ♦ [“Adding a Throw Fault Action” on page 289](#)

About the Throw Fault Action

You use the Throw Fault action to do the following:

- ♦ Write information to an XML message on failure of an action
- ♦ Perform any number of actions before throwing the fault
- ♦ Halt execution of a component

Throw Fault is only executed when a condition that you specify is true. The message part that is written when a Throw Fault action is executed is called a Fault document, and the XML within this message is contained in a global object called ERROR.

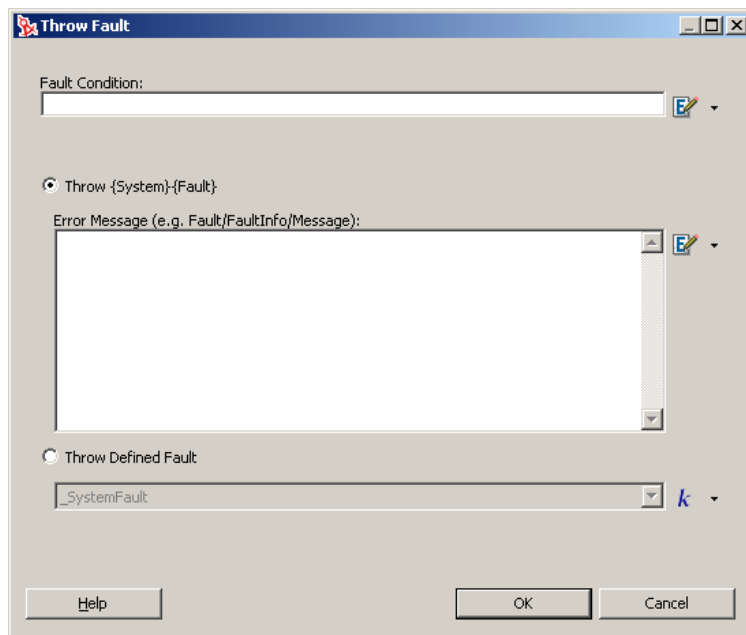
Throw Fault actions can be used in a number of ways:

- ♦ Using a Throw Fault Action by itself. You can specify a Fault Condition and an error message within the Throw Fault Action dialog. When the action is executed, the Fault Condition is evaluated. If the condition evaluates as True, the following occurs:
 - ♦ Any Before Throw actions that you specify are executed. This can be very useful as a way to leave your application in a particular state before halting execution. For example, you can send a mail message stating that the execution did not complete.

- ◆ The contents of the error message are written to the Fault document in a node that you specify, as well as to the global object ERROR.
 - ◆ The action model execution is halted.
- ◆ Using a Throw Fault Action within a decision expression in the Decision action. You can specify a fault condition by entering it in the decision expression of a Decision action. Then put a Throw Fault statement in the True branch of the Decision action. Here you can either specify additional conditions in the Throw Fault fault condition or leave it blank and simply specify the fault document to which the fault information should be written. When the action is executed and all your conditions are True, the Throw Fault action is executed. If the fault condition in the Decision action or Throw Fault action is False, the next action in the action model is executed.
 - ◆ Using a Throw Fault inside a Try /On Fault action (see [“Try/On Fault” on page 290](#)). By putting either of the above methods inside the execute branch of a Try /On Fault action, you prevent the Integration activity from halting execution and have an opportunity to respond or recover from the fault. You create your fault condition by using one of the previous two methods inside the execute branch of a Try/On Fault action after other actions the output of which you want to test have worked correctly. You can specify any number of unique faults so that the Integration activity can branch into several different directions, depending on which fault occurs. When the Throw Fault action for the given fault is triggered, instead of halting execution of the component, control passes into the appropriate branch of the Try/On Fault action. Here you can specify other actions to remedy or respond to the error.

Adding a Throw Fault Action

- 1 Right-click the line in the action model that is one line above the position in which you want to place the Throw Fault action (the new action is inserted below the line that you selected).
- 2 Select *New Action > Advanced > Throw Fault*.



- 3 In the *Fault Condition* field, type a valid ECMAScript expression that, when True, causes the action to throw a fault.


You can also click the ECMA Expression Builder button and build an expression (see [Chapter 9, “Working with ECMA Expressions,” on page 315](#)).

- 4 Select *Throw {System}{Fault}* to write your error message to the `_SystemFault` document.

By default, the message that you type in the *Error Message* field is placed in the Fault/FaultInfo/Message node of that document. Specify a different node if desired. You can also click the ECMA Expression Builder button and build an expression.

- 5 Select *Throw Defined Fault* to select a fault document that is one of the message parts associated with the Integration activity.
- 6 Click *OK*.

The new action is added to the action model. Place any actions that you wish to execute before the application stops in the *Before Throw Actions* branch.



Try/On Fault

The section includes the following topics:

- ♦ [“About the Try/On Fault Action” on page 290](#)
- ♦ [“Adding a Try/On Fault Action” on page 290](#)

About the Try/On Fault Action

The Try/On Fault action executes a set of actions when a fault occurs within the Execute branch of the Try/On Fault action. Any number of defined faults can be specified within the Execute branch. You can use the Try/On Fault action to trap anticipated errors and run other actions to remedy or report on the fault. For instance, you can use Try/On Fault to respond to an XML Interchange action that fails to find a file.

When you add a Try/On Fault action, several lines are added to the action model:

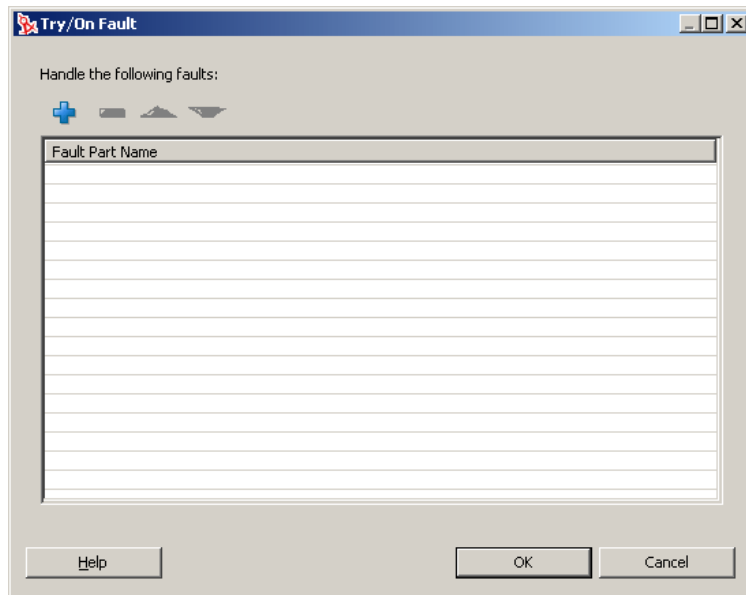
- ♦ The beginning of the Try action
- ♦ The *Execute* branch
- ♦ A branch for each Fault that you specified
- ♦ An *All other Faults* branch

When you are aware of potential faults an action can produce, you put those actions in the Execute branch. You then put error handling actions under each On Fault branch to handle unique situations. If a fault does occur, the actions in the On Fault branch execute.

Using the example given previously, if you anticipate a fault with the XML Interchange action, you put the action under the Execute branch. In one On Fault branch, you might add another XML Interchange action that attempts to read the file from an alternate location. In another On Fault branch, you might add another XML Interchange action that looks for a file with a different extension.

Adding a Try/On Fault Action

- 1 Right-click the line in the action model that is one line above the position in which you want to place the Try/On Fault action (the new action is inserted below the line that you selected).
- 2 Select *New Action > Advanced > Try/On Fault*.



Use the + icon to add a new fault part to the *Fault Part Name* list. Use the red - icon to remove fault parts from the list. Use the up-arrow and down-arrow icons to change the order of the faults.

If you don't specify a fault part, corrective actions can be placed in the default All Other Faults branch of the Try/On Fault action.


3 Click OK.

The following appears in the Action Model Viewer: the *Try On Fault* action icon, with an Execute, one or more On Fault branches, and an All Other Faults branch.

4 Add any actions that might cause errors to the Execute branch.

5 In the On Fault branch, add actions that resolve the errors specified in the Execute branch.

The following illustration shows a complete Try/On Fault action in the action model.

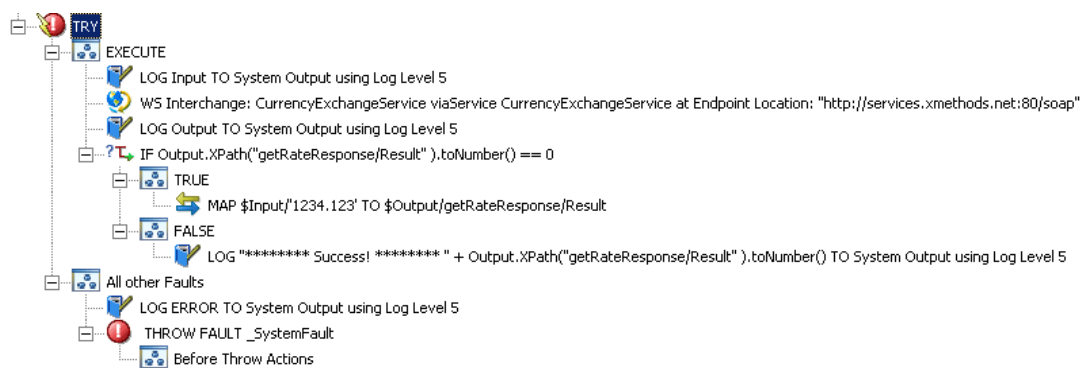

8.5.2 Data Exchange

This section includes descriptions of the following actions:

- ♦ [“WS Interchange” on page 292](#)
- ♦ [“XML Interchange” on page 293](#)

WS Interchange

This section includes the following topics:

- ♦ “About the WS Interchange Action” on page 292
- ♦ “Adding a WS Interchange Action” on page 292

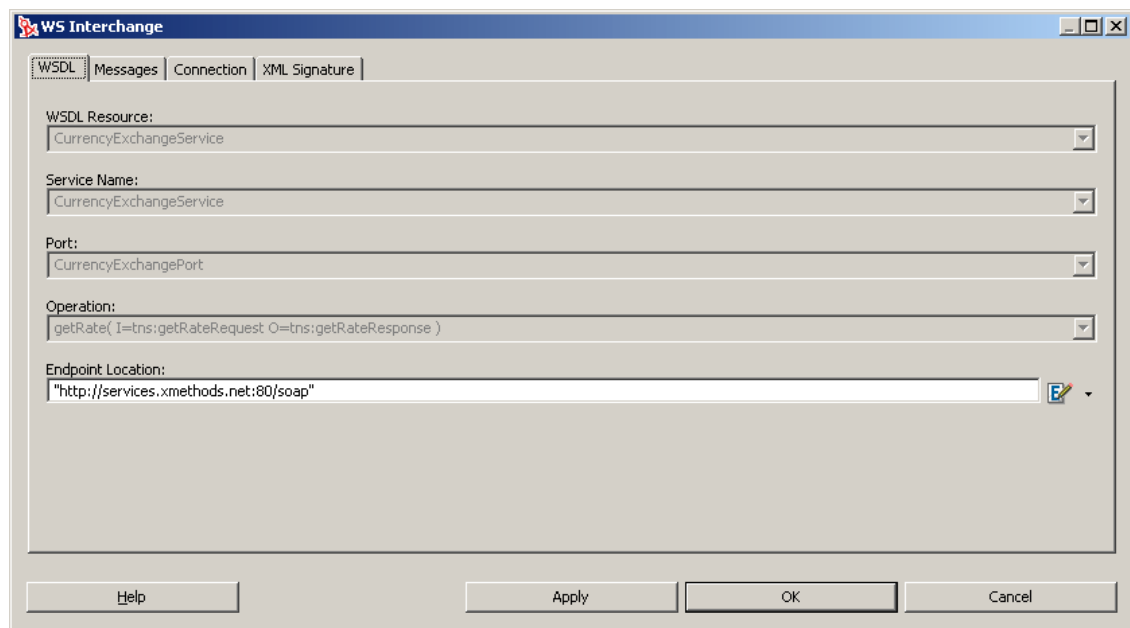
About the WS Interchange Action

The WS (Web Service) Interchange action is the most important action in the Integration activity and allows the Integration activity to invoke a Web service according to calling conventions specified in a WSDL file. The Integration activity automatically creates a WS Interchange action when it creates the action model.

In most cases there is no need to add another WS Interchange action to the action model. However, there might be situations in which you need to do so. The following procedure describes how to add a WS Interchange action.

Adding a WS Interchange Action

- 1 Right-click the line in the action model that is one line above the position in which you want to place the WS Interchange action (the new action is inserted below the line that you selected).
- 2 Select *New Action > Data Exchange > WS Interchange*.




The screenshot shows the 'WS Interchange' dialog box with the 'WSDL' tab selected. The fields are filled with the following values:

- WSDL Resource: CurrencyExchangeService
- Service Name: CurrencyExchangeService
- Port: CurrencyExchangePort
- Operation: getRate(I=tns:getRateRequest O=tns:getRateResponse)
- Endpoint Location: "http://services.xmethods.net:80/soap"

Buttons at the bottom: Help, Apply, OK, Cancel.

The *WSDL Resource*, *Service Name*, *Port*, and *Operation* fields are filled in automatically based on the information in the WSDL specified for the Integration activity.

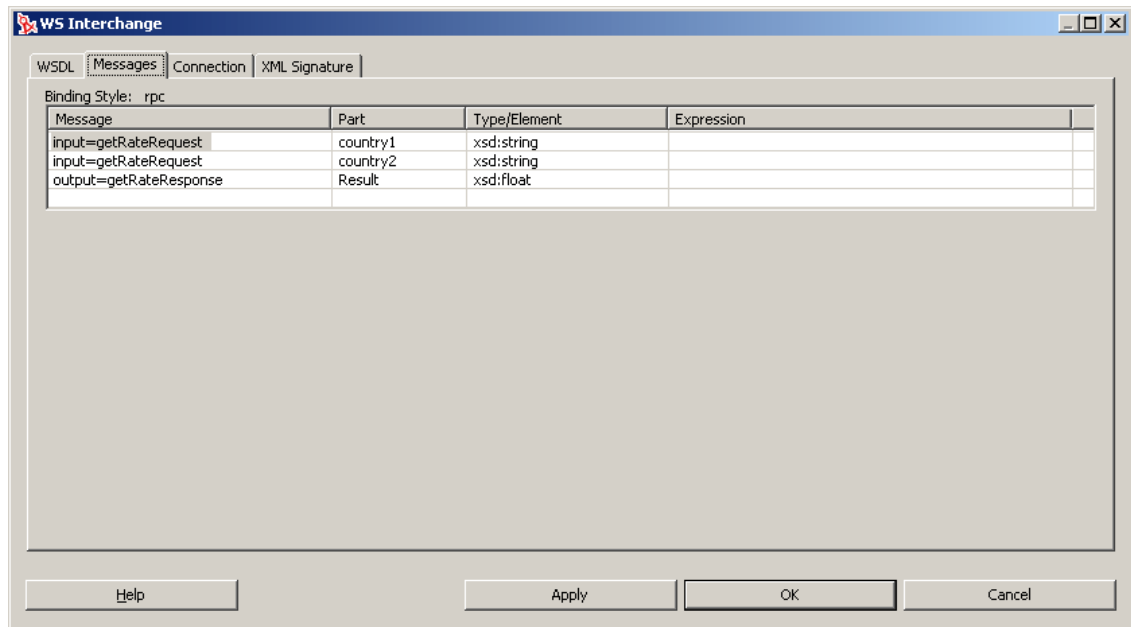- 3 If desired, modify the information in the *Endpoint Location* field (usually a URL pointing at a servlet) for the Web service that you wish to use, wrapped in quotation marks. Alternatively, enter an ECMAScript expression that will evaluate to an Endpoint Location at runtime.
- 4 Click the *Messages* tab.



The *Message*, *Part*, and *Type/Element* fields are filled in automatically based on the information in the WSDL specified for the Integration activity.

- 5 If desired, click the *Expression* column for a message, then use the ECMA Expression Builder to create an ECMAScript expression that describes the source and target for the message. Usually, this is an expression that specifies an XPath location in an Input part or Output part.
- 6 Click the *Connection* tab.
You use this tab to specify connection parameters for HTTP servers that require authentication.
- 7 Type a user ID to use for the connection in the *User ID* field, and a password for the user in the *Password* field.
The user ID and password are not actually submitted during the establishment of a connection. They are simply defined here. The password is encrypted. You will have access to UserID and Password variables in ECMAScript, allowing you to map the user ID and password as values into the screen. This way, no one ever sees the passwords.
- 8 If the connection requires a client certificate, choose a client certificate by clicking the browse button in the *Client Certificate* field and selecting the certificate file you want to use for this connection.
- 9 If the connection requires a client private key, choose a client private key by clicking the browse button in the *Client Private Key* field and selecting the client private key file.
- 10 Type the password for the client private key in the *Private Key Password* field.
- 11 Specify a connection timeout value, in seconds, in the *Connection Timeout* field.
- 12 Click *Apply* to test the WS Interchange action in real time, or click *OK* to close.

XML Interchange

This section includes the following topics:

- ♦ [“About the XML Interchange Action” on page 294](#)
- ♦ [“Adding an XML Interchange Action” on page 294](#)

About the XML Interchange Action

The XML Interchange action reads external XML documents into a DOM and writes data from the DOM as XML files. There are four types of XML Interchange actions:

- ◆ GET
- ◆ PUT
- ◆ POST
- ◆ POST with Response

When using the GET interchange, fill in the *Interchange URL Expression* field with a URL that points to the XML document that you want to bring into the Integration activity. In the *Response Part* field, you select the DOM (Input, Output, _SystemFault, or Project) that is to receive the XML.

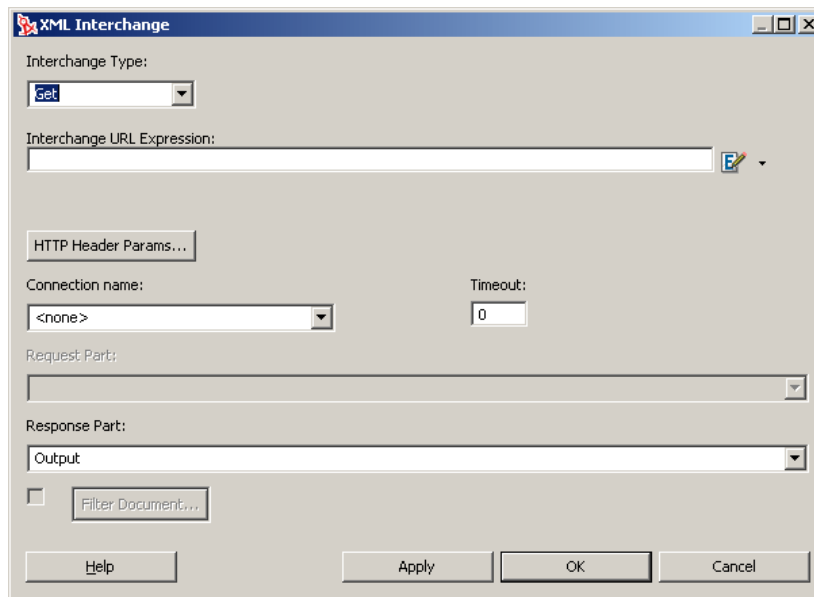
When using the PUT interchange, enter a URL that points to the location to which you want to write the XML document in the *Interchange URL Expression*. In the *Request Part* field, you select the name of the DOM from which you want to send data as XML.

When using the POST interchange, enter a URL that points to the location to which you want to write the XML document in the *Interchange URL Expression* field. In the *Request Part* field, you select the name of the DOM from which you want to send data as XML.

When using the POST with Response interchange, you supply the same parameters as for Post, with one additional parameter. You must also specify a Response Part DOM to receive the Response XML document from the Post with Response interchange. The difference between the two interchanges is that Post with Response expects a response XML object back from the origin server.

Adding an XML Interchange Action

- 1 Right-click the line in the action model that is one line above the position in which you want to place the XML Interchange action (the new action is inserted below the line that you selected).
- 2 Select *New Action > Data Exchange > XML Interchange*.



- 3 Select an *Interchange Type* (Get, Put, Post, or Post with Response).

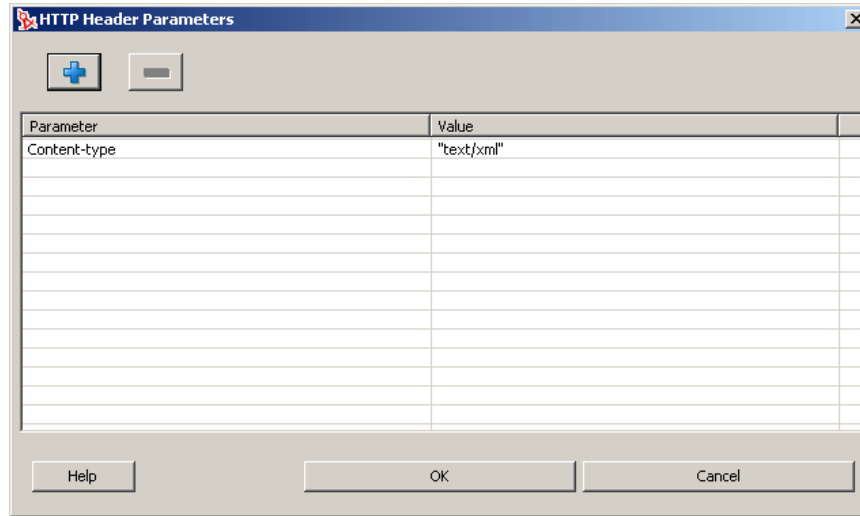
- 4 In the *Interchange URL Expression* field, type an expression that defines a fully qualified URL for an XML document, using any of the following supported protocols:
 - ◆ file
 - ◆ FTP
 - ◆ HTTP
 - ◆ HTTPS

Depending on the *Interchange Type* selected, this URL is the source or the destination of the XML file for the XML Interchange action. For example:


```
file:///g:/xmldata/invoicebatch1.xml
ftp://accounting:password@123.456.789.987:21/invoices/inv1.xml
```

Because this is an ECMAScript expression, the URL string must be enclosed in quotation marks.

- 5 If you need to specify HTTP header parameters, click *HTTP Header Parameters*.



- 6 Click the plus (+) icon to add new header parameters, then type a *Parameter* name and a corresponding *Value*. Common HTTP header parameters include "Content-Type," "Content-Length," and "Keep-Alive." You can add any number of Parameter-Value pairs.
- 7 Click *OK* to return to the *XML Interchange* dialog box.
- 8 In the *Request Part* field (which is enabled if the *Interchange Type* is Put, Post, or Post with Response), select the name of the DOM from which you want to send data as XML.
- 9 In the *Response Part* field (which is enabled if the *Interchange Type* is Get or Post with Response), select the name of the DOM tree that will receive the XML.
- 10 If you want to filter the incoming XML document to improve performance, select the check box next to the *Filter Document* button, then select the *Filter Document* button.

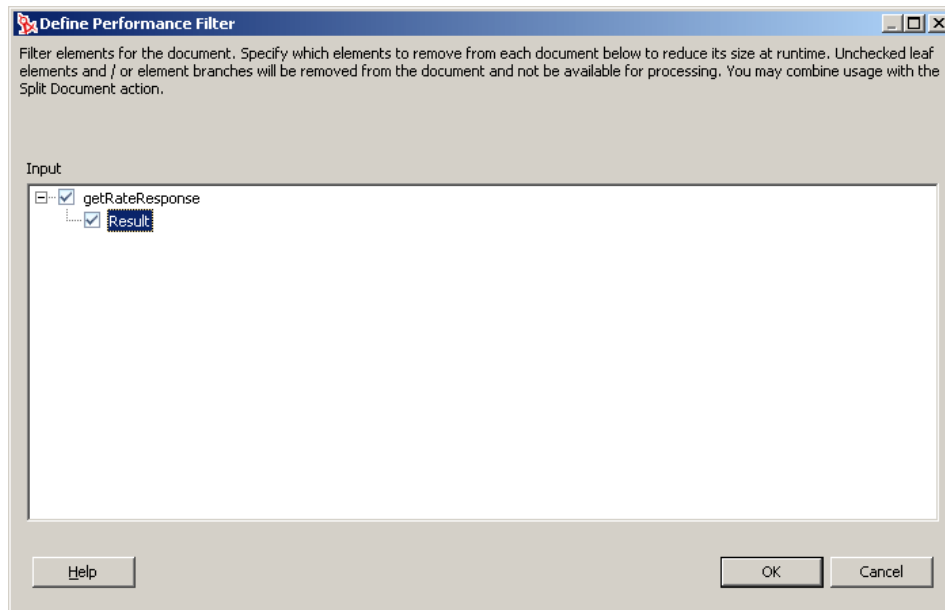

The document displayed is the document selected in the *Response Part* in the *XML Interchange* dialog box.

You use this dialog box to specify the individual nodes to retain (rather than discard) from the incoming XML document in real time to improve performance and reduce RAM overhead.

- 11 Select the nodes that you want to keep in the document.

Nodes that are not selected are discarded before parsing the DOM.

- 12 When you have selected nodes that you want to keep, click *OK* to return to the *XML Interchange* dialog box.
- 13 Click *OK*.

Alternatively, you can click *Apply* to see the affect of the XML Interchange action without closing the dialog box. This allows you to make repetitive edits to an XML Interchange action and quickly see the results.

8.5.3 Repeat

This section includes descriptions of the following actions:

- ♦ [“Break” on page 297](#)
- ♦ [“Continue” on page 297](#)
- ♦ [“Declare Group” on page 298](#)
- ♦ [“Repeat for Element” on page 299](#)
- ♦ [“Repeat for Group” on page 301](#)
- ♦ [“Repeat While” on page 302](#)

Break

This section includes the following topics:

- ♦ [“About the Break Action” on page 297](#)
- ♦ [“Adding a Break Action” on page 297](#)

About the Break Action

The Break Action stops the execution of a Repeat for Element, Repeat for Group, or Repeat While loop. The action model continues execution with the next action outside the loop.

The use of Break is appropriate when, for example, you are using a loop to search a node list for one particular item. When the target item is found, there is no need to continue iterating. A Break can be used to terminate the loop immediately.

NOTE: A Break action is usually used in one branch of a Decision action (within a loop). You place the Break action in either the True or False branch of the Decision action.

Adding a Break Action

- 1 Within a Repeat action that you want to modify to include a Break action, select a position inside the loop where you want to place the Break action.

Generally, this is in one leg or the other of a Decision action.

- 2 Select *New Action > Repeat > Break*.

The Break action is inserted into the action model.

Continue

This section includes the following topics:

- ♦ [“About the Continue Action” on page 297](#)
- ♦ [“Adding a Continue Action” on page 297](#)

About the Continue Action

The Continue action causes execution of the current iteration of a Repeat for Element, Repeat for Group, or Repeat While loop to stop and execution to begin at the top of the loop, with the next iteration. The Continue action provides a way to pass over downstream actions inside the loop while allowing the loop to continue on to the next iteration.

A Continue action is appropriate in a situation where, for example, one item in a list should be skipped for some reason, yet execution of the loop must continue.

NOTE: A Continue action usually occurs in one branch of a Decision action within a loop. You place the Continue action in either the True or False branch of the Decision action, as appropriate.

Adding a Continue Action

- 1 Within a Repeat action that you want to modify to include a Continue action, select a position inside the Loop actions where you want to place the Continue action.

This is usually inside one fork or the other of a Decision action.

- 2 From the Action menu, select *New Action > Repeat > Continue*.

A Continue action appears in the action model.

Declare Group

This section includes the following topics:

- ♦ [“About the Declare Group Action” on page 298](#)
- ♦ [“Adding a Declare Group Action” on page 298](#)

About the Declare Group Action

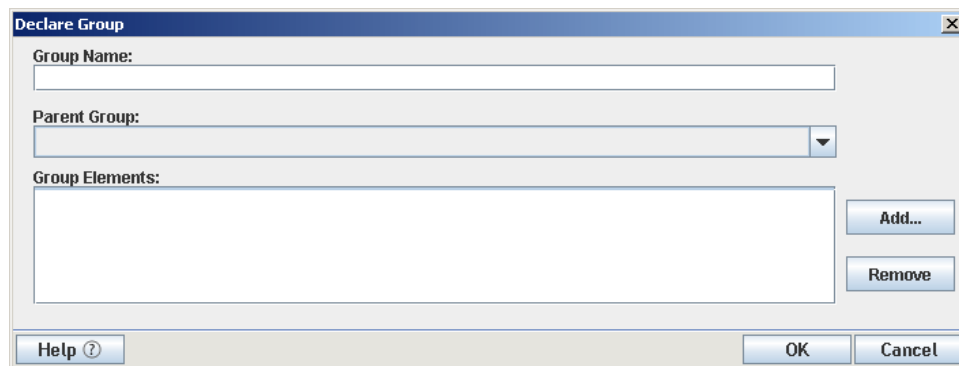
You use the Declare Group action to create two special lists, each in reference to a DOM. These group lists can then be used as the basis for a loop in the Repeat for Group action. To create the lists, you supply a Group Name and specify an XPath. The Integration activity then creates the lists as follows:

- ♦ A Group list is created that contains one entry for each unique value found in all the elements that match the XPath. The Group list is referred to by the Group Name that you supply.
- ♦ A Detail list is created for each unique entry in the Group list that contains as many entries as there are members in the Group. The Detail list is referred to by the group name that you supply, post-fixed with the label (Detail).


Using Groups allows you to select a repeating element in your Input DOM and create fewer elements based on the unique values across all siblings of that repeating element. Instead of having multiple elements, you have one element for each unique element value in your Output DOM.

Adding a Declare Group Action

- 1 Right-click the line in the action model that is one line above the position in which you want to place the Declare Group action (the new action is inserted below the line that you selected).
- 2 Select *New Action > Repeat > Declare Group*.



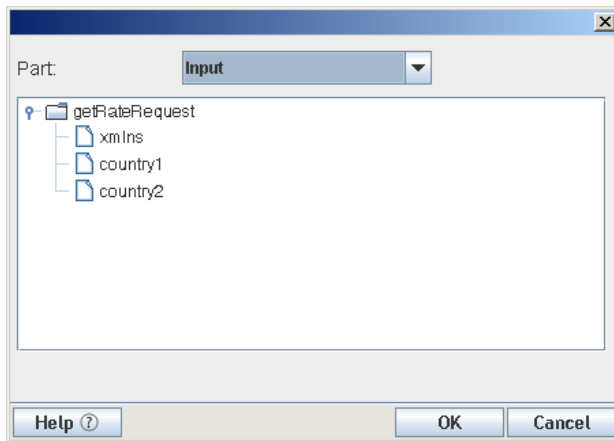- 3 Type a name for the group in the *Group Name* field.
- 4 If you want to create multiple group levels, select a group from the *Parent Group* list, which lists groups that you have previously defined.
- 5 Click Add. The *Add Element* dialog box is displayed.



- 6 Select a part name and an element.
- 7 Click OK.
- 8 Repeat [Step 5](#) through [Step 7](#) to add more elements to the group.
- 9 When you have all the elements that you want in the group, click OK.

Repeat for Element

This section includes the following topics:

- ♦ [“About the Repeat for Element Action” on page 299](#)
- ♦ [“Adding a Repeat for Element Action” on page 300](#)

About the Repeat for Element Action

The Repeat action creates looping structures within an action model. Loops give you the ability to repeat a set of one or more actions. There are three types of loops: Repeat for Element, Repeat for Group, and Repeat While.

XML allows multiple instances of an element in a document (analogous to multiple records in a database table). The number of instances can vary from document to document and is defined in the document schema (DTD or XML Schema). For example, you might receive an XML document containing line items for an invoice on a daily basis. Each day the XML document has a different number of line items. Not knowing how many instances of “line item” are in the XML document poses a problem if you want to transfer these item numbers from the input XML document to an output XML document programmatically. The Repeat for Element action solves this problem.

The Repeat for Element action allows you to mark an element that occurs multiple times. The action then sets up a processing loop that executes one or more actions for each instance of the marked element until no more instances exist. In the previous example, the processing loop would contain a single Map action to transfer the line item number and this action would be repeated until all line items had been mapped.

The Repeat for Element action also uses the concept of an alias. An alias performs two functions. It is an alternate name or shorthand for the marked repeating element, which saves you the work of re-specifying long XPath expressions. In some cases, the repeating element might be several levels down in the document hierarchy. When you create Map actions in the Repeat loop that transfers child elements of the marked element, using the alias is quicker than re-typing a long XPath expression. An

alias is also an indicator to Map actions within the Repeat loop to use the next instance of the repeating element each time the loop processes. A Map action within a Repeat for Element loop that does not use the alias always refers to the first instance of the element in the source message.

The Repeat for Element action allows you to process more than one action within the loop. In the simplest case, the repeat loop might only contain one Map action that transfers the value of the current element instance from the input Part to the output Part. You can also define multiple actions in the processing loop. For example, a Map action to transfer the current value, and a Log action that writes to a file, creating an audit of each transfer.

Adding a Repeat for Element Action

- 1 Right-click the line in the action model that is one line above the position in which you want to place the Repeat for Element action (the new action is inserted below the line that you selected).
- 2 Select *New Action > Repeat > Repeat for Element*.

The screenshot shows the 'Repeat for Element' dialog box. It has a title bar with a red 'X' icon and the text 'Repeat for Element'. The dialog is split into two main sections: 'Source' and 'Target'.
In the 'Source' section:
- There is an 'Alias:' label followed by a text input field.
- Below that is a 'Representing:' label with two radio buttons: 'XPath:' (which is selected) and 'Expression:'.
- Underneath the radio buttons is a long text input field with a small icon of a pencil and a blue 'X' on the right side.
In the 'Target' section:
- There is an 'Alias:' label followed by a text input field.
- To the right of the 'Alias' field is a checkbox labeled 'Always create new output elements'.
- Below that is a 'Representing:' label with two radio buttons: 'XPath:' (which is selected) and 'Expression:'.
- Underneath the radio buttons is a long text input field with a small icon of a pencil and a blue 'X' on the right side.
At the bottom of the dialog, there are three buttons: 'Help', 'OK', and 'Cancel'.

- 3 Specify the *Source* information.
 - 3a Type an alias name in the Source *Alias* field.

A good naming convention for an alias is to use the element name with a prefix indicating source or target and the type of repeat action, such as "S1Lineitem."
 - 3b Type an XPath expression, or click the ECMA Expression Builder button and build an XPath expression for the repeating element.
- 4 Specify the *Target* information.
 - 4a Type an alias name in the Target *Alias* field.
 - 4b Select *Always create new output elements* if you have repeating actions that should add new elements rather than updating existing elements.
 - 4c Specify an XPath expression, or click the ECMA Expression Builder button and build an XPath expression for the repeating element.

- 5 Click *OK*. The Repeat for Element loop is added to the action model.
- 6 Click *Loop Actions* in the action model to begin adding actions to be performed within the loop.

Repeat for Group

This section includes the following topics:

- ♦ [“About the Repeat for Group Action” on page 301](#)
- ♦ [“Adding a Repeat for Group Action” on page 301](#)

About the Repeat for Group Action

The format of an XML document that you receive is not always the format that meets the requirements of your business process. A Repeat for Group action allows you to restructure data and establish a framework to calculate aggregates on your data. Grouping allows you to select a repeating element in your input part and create fewer elements based on the unique values across all siblings of that repeating element.

The Repeat for Group action sets up a processing loop based on one of two lists created by the Declare Group action. The loop executes as many times as there are entries in the list you use (either the Group list or Detail list). By combining a Repeat for Group with Map commands, you can create a new XML document that has a different structure and data from the original.

Similar to the Repeat for Element action, a Repeat for Group action also uses the concept of an alias. The values for the source group used in the Repeat for Group dialog boxes are the list names created by the Declare Group action. The list names perform two functions. They are an alternate name or shorthand for the XPath source of any Map actions within the loop. This saves you the work of re-specifying long XPath expressions. The group list name, when used in place of a DOM name in a Map action source, is also an indicator to the Map action within the Repeat loop to use the next instance in the group list each time the loop processes. A Map action within a Repeat for Group loop that does not use the group name always refers to the first instance of the element in the source part.

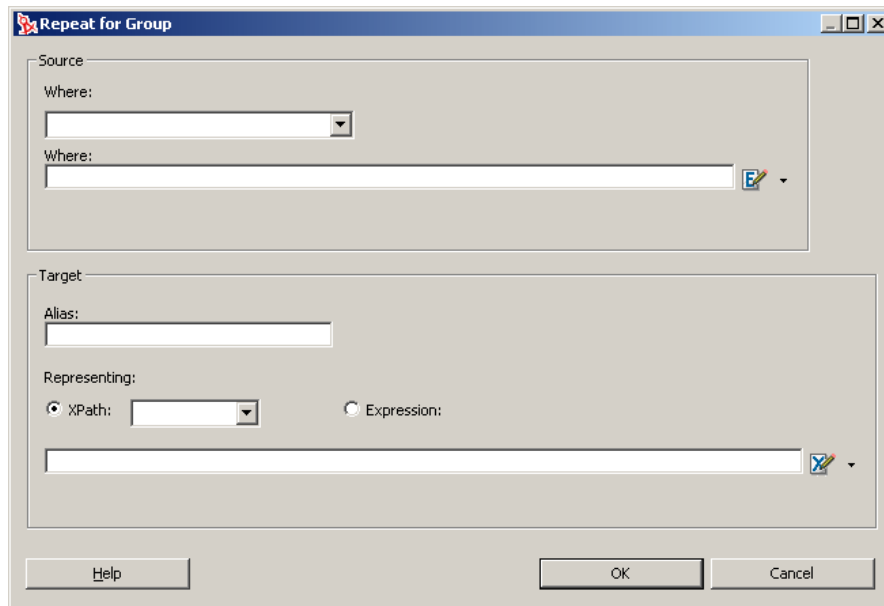
The target aliases created in the Repeat for Group action also serve two functions. They are an alternate name or shorthand for the XPath target of any Map actions within the loop. This saves you the work of re-specifying long XPath expressions. The target alias, when used in place of a part name, is also an indicator to Map actions within the Repeat loop to create a new instance of the Source in the target message part. A Map action within a Repeat for Group loop that does not use a target alias always overwrites the first instance created in the target message part with subsequent instances from the source group list.

Creating a Repeat for Group action consists of three tasks:

- ♦ Create a Declare Group action to create the group lists.
- ♦ Create a Repeat for Group action specifying which group list to use.
- ♦ Create Map actions inside the loop.

Adding a Repeat for Group Action

- 1 Right-click the line in the action model that is one line above the position in which you want to place the Repeat for Group action (the new action is inserted below the line that you selected).
- 2 Select *Action > New Action > Repeat > Repeat for Group*.



- 3 In the Source section, select a Group name from the *Where* list on which to base the Repeat for Group action loop.
- 4 Optionally, type a Where clause in the *Where* field to filter the group list, or click the ECMA Expression Builder icon and create a Where expression.
- 5 If you know the alias for the Target element, type the name in the *Alias* field.
- 6 If you do not know the alias, select either the *XPath* button and select an element from the list, or select the *Expression* button and type an expression (or click the ECMA Expression Builder button and build an expression).
- 7 Click *OK*.

Repeat While

This section includes the following topics:

- ♦ [“About the Repeat While Action” on page 302](#)
- ♦ [“Adding a Repeat While Action” on page 303](#)

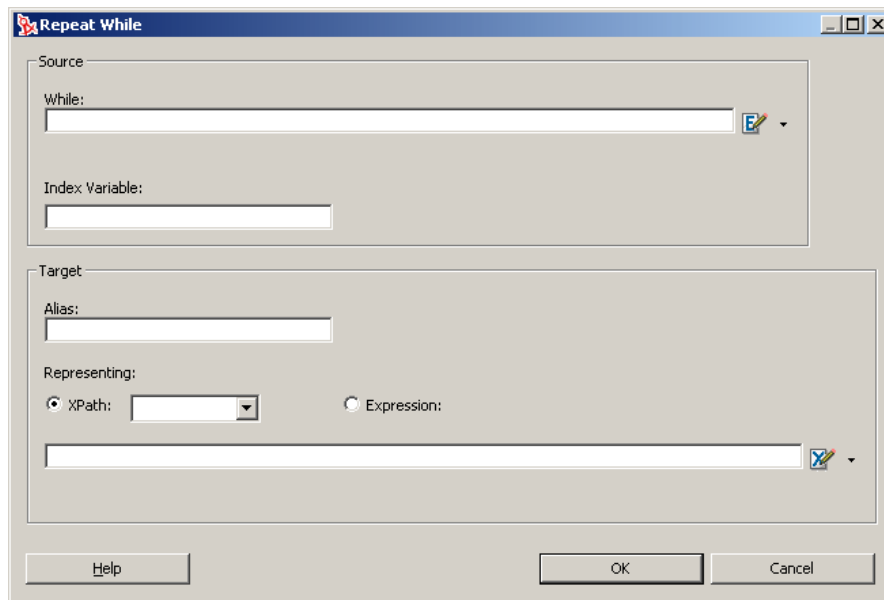
About the Repeat While Action

The Repeat While action repeats one or more actions as long as a condition that you specify remains True. The target alias that you create in the Repeat While action serves two functions. It is an alternate name or shorthand for the XPath target of any Map actions within the loop. This saves you the work of respecifying long XPath expressions. The target alias, when used in place of a DOM name in a Map action, is also an indicator to Map actions within the Repeat loop to create a new instance of the source in the target DOM. A Map action within a Repeat for Group loop that does not use a target alias always overwrites the first instance created in the target DOM with subsequent instances from the source.

NOTE: Unlike the Repeat for Element and Repeat for Group, Repeat While does not need to be based on data in a DOM tree. The loop can operate independently of data in the DOM tree.

Adding a Repeat While Action

- 1 Right-click the line in the action model that is one line above the position in which you want to place the Repeat While action (the new action is inserted below the line that you selected).
- 2 Select *New Action > Repeat > Repeat While*.



- 3 In the *While* field, type an expression that tests the While loop, or click the ECMA Expression Builder button and build an expression.
- 4 In the *Index Variable* field, type a name for a variable to keep track of the condition of the loop.
- 5 If you know the alias for the Target element, type the name in the *Alias* field.
- 6 If you do not know the alias, select either the *XPath* button and select an element from the list, or select the *Expression* button and type an expression (or click the ECMA Expression Builder button and build an expression).
- 7 Click *OK*.

8.5.4 Comment

This section includes the following topics:

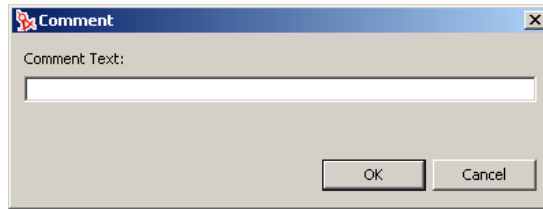
- ♦ [“About the Comment Action” on page 303](#)
- ♦ [“Adding a Comment Action” on page 304](#)

About the Comment Action

You can use the Comment action to document the action model and clarify the processing that takes place. You can add comments anywhere within an action model. Comments perform no processing of their own.

Adding a Comment Action

- 1 Right-click the line in the action model that is one line above the position in which you want to place the comment (the new action is inserted below the line that you selected).
- 2 Select *New Action > Comment*.



- 3 Type your comment.
- 4 Click *OK*.

8.5.5 Decision

This section includes the following topics:


- ♦ [“About the Decision Action” on page 304](#)
- ♦ [“Adding a Decision Action” on page 304](#)

About the Decision Action

The Decision action creates an *if...then* construct between actions or a group of actions. You use a Decision action to select a branch, based on a condition that you supply. The condition must use an ECMAScript comparison operator, such as `=`, `<`, `>`, `!`, `>=`, `<=`, `(&)`, `OR (||)`, or `<>`. The expression must resolve to a Boolean *True* or *False* statement.


Adding a Decision Action

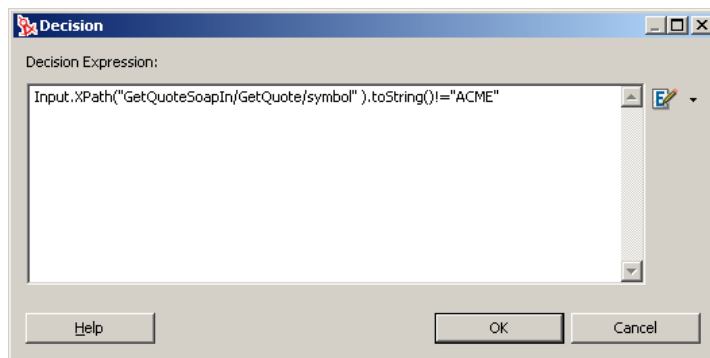- 1 Right-click the line in the action model that is one line above the position in which you want to place the Decision action (the new action is inserted below the line that you selected).
- 2 Select *New Action > Decision*.



- 3 Type an ECMAScript expression, or click the ECMA Expression Builder button and create a Decision script that will evaluate to *true* or *false* at runtime.
- 4 Click *OK*.

A Decision action similar to the following is displayed.



- 5 In the action model pane, select the *TRUE* branch.
- 6 Add one or more actions that will execute if the expression is True.
- 7 Select the *FALSE* branch.
- 8 Add one or more actions to execute if the expression is False.

You can nest other Decision actions inside the TRUE or FALSE branches of the Decision action.

8.5.6 Function

- ♦ [“About the Function Action” on page 305](#)
- ♦ [“Adding a Function Action” on page 305](#)

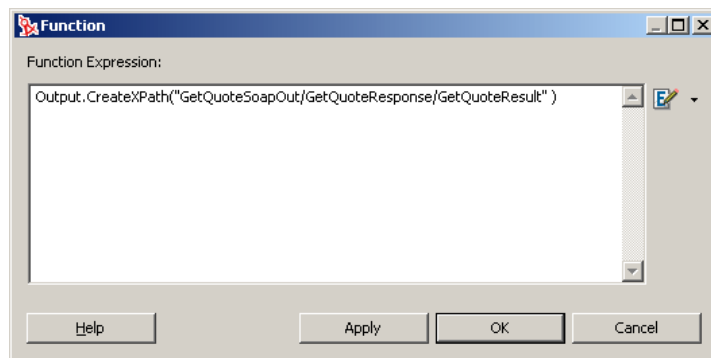
About the Function Action

The Function action executes an ECMAScript function. To manipulate a DOM element, the script that you call in the Function action must reference a fully qualified DOM element name in the current Integration activity.

Custom Script functions that you create and add to an action model can act upon any XML tree element. For example, you can create a function that changes the format of a date element. You can create a function that performs a math function on the contents of an element. You can also perform file system, database, or URL functions that have no interaction with a message part.

Adding a Function Action

- 1 Right-click the line in the action model that is one line above the position in which you want to place the Function action (the new action is inserted below the line that you selected).
- 2 Select *New Action > Function*.



- 3 Type the function in the *Function Expression* field or click the ECMA Expression Builder button to build an ECMAScript expression.
- 4 Click *OK*.

8.5.7 Log

- ♦ “About the Log Action” on page 306
- ♦ “Adding a Log Action” on page 306

About the Log Action

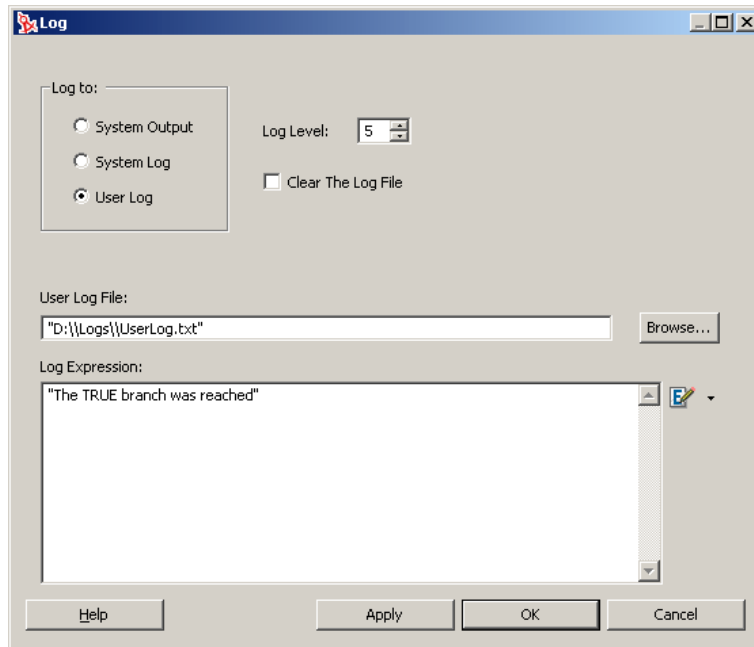
Log actions provide customizable reporting capabilities (design-time as well as runtime) for Integration activities. You can specify log level settings to control the degree of reporting.

Some Log usage examples include the following:

- ♦ Writing certain error information to the operator console when a Try On Fault condition is reached.
- ♦ Using ECMAScript expressions to aid in debugging by logging information about variables or DOM contents, the values of which are known only at runtime.
- ♦ Capturing specific information from each cycle of a Repeat for Element loop.

Adding a Log Action

- 1 Right-click the line in the action model that is one line above the position in which you want to place the Log action (the new action is inserted below the line that you selected).
- 2 Select *New Action > Log*.



- 3 Select the type of log that you want to produce from the *Log to* group.

The Log action writes information to locations specified in the action. There are three locations for log output: System Output, System Log, and User Log.

Log Location	Description
<i>System Output</i>	Select System Output to write messages that you specify in the <i>Log Expression</i> field to the operating system console at design time, or the application server console at runtime. NOTE: To view messages on the operating system console, start Designer using the Eclipse <code>-debug</code> and <code>-consoleLog</code> startup parameters.
<i>System Log</i>	Select System Log to write messages that you specify in the <i>Log Expression</i> field to the application server log file.
<i>User Log</i>	Select User Log to write messages that you specify in the Log Expression field to a file that you specify in the <i>User Log File</i> field.

- 4 Use *Log Level* to select a priority level (1 to 10) for this Log action.

The default priority level is 5. You should assign a number from 5 to 10 to messages that you want to appear in the log file. The priority you assign here is compared to the threshold number (which is set to 5 internally and cannot be changed). If the priority is equal to or greater than the threshold, the message is logged; otherwise it is not.

- 5 Check *Clear the Log File* if you want the data in the log file to be cleared each time the component is executed.
- 6 If *User Log* is selected in the *Log to* group, type the path to the log file in the *User Log File* field, or use *Browse* to specify a log file.

If you specify a file that doesn't exist, the file is created. On Windows* systems, if you type the path, you must add an extra backslash character wherever a backslash character occurs in a path (for example, `C:\Windows` becomes `C:\\Windows`).

- 7 Create the message that you want to record to the log in the *Log Expression* field.

You can type a message in the field or use the ECMA Expression Builder to build an expression.

8.5.8 Map

This section includes the following topics:

- ♦ [“About the Map Action” on page 307](#)
- ♦ [“Adding a Map Action” on page 309](#)
- ♦ [“Advanced Mapping Options” on page 309](#)
- ♦ [“Transforming Elements with the Content Editor” on page 312](#)

About the Map Action

The Map action performs DOM-node input and output mapping. It can transfer and transform data from one document context to another document context. A context has two parts. The first part usually identifies a DOM and the second part identifies a location within the DOM. The basic document context in an Integration activity is expressed as a DOM name combined with an element

location identified through an XPath expression. The DOM name is usually Input, Output, _System Fault, or Project. The XPath expression identifying a location in a DOM has the path elements delimited by “/”.

NOTE: A context in an Integration activity can also be a Group name that itself is simply an alias or shorthand for an XPath expression.

- ◆ [“Default Mapping Behavior” on page 308](#)
- ◆ [“Leaf Elements That Contain Markup” on page 308](#)

Default Mapping Behavior

When you use the Map action to map elements and attributes within XML documents, certain default behaviors occur. The following table lists those default behaviors.

Table 8-5 *Default Mapping Behavior*

Map Type	Default Behavior
Leaf Element to Leaf Element	Transfers only the element data .
Leaf Element to Branch Element	Transfers only the element data.
Branch Element to Leaf Element	Transfers the entire branch, including all child elements and attribute data under the branch.
Branch Element to Branch Element	Transfers the entire branch, including all child elements and attribute data under the branch after removing the target's current branch.
A particular Leaf Element in a list of Leaf Elements, to Element	Transfers the element data from the selected leaf (or element instance) to the target element.
Attribute to Attribute	Transfers only the attribute data.
Element to Attribute	Transfers element data to attribute data.
Attribute to Element	Transfers only the attribute data.

Many of these behaviors can be altered, on an action-by-action basis, through the use of the Advanced mapping dialog box (see [“Advanced Mapping Options” on page 309](#)).

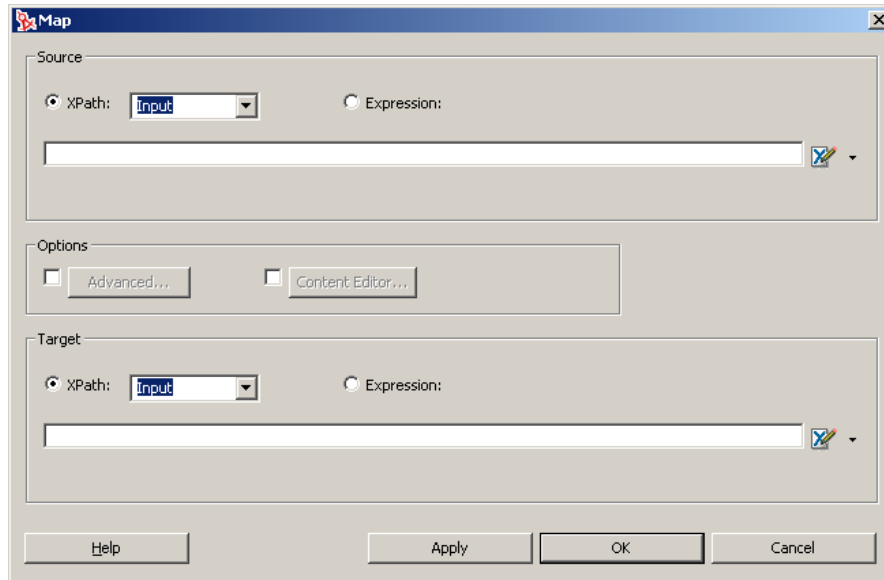
Leaf Elements That Contain Markup

A problem can occur when an element is populated at runtime by a Java or ECMAScript operation. The element might receive data that contains markup (strings with illegal characters, such as < and >). If the Integration activity were to map the contents of such an element to a node in the Output DOM, the output document would be malformed. The Integration activity resolves this issue by mapping any data that contains markup to a new CDATA section in the target document.

NOTE: When markup is entered at design time, the behavior is different. If you type markup into a node, and you examine the raw XML in the Source view, you'll see that markup characters typed into a node are converted to entities. For example, a “<” character is converted to `<`;

Adding a Map Action

- 1 Right-click the line in the action model that is one line above the position in which you want to place the Map action (the new action is inserted below the line that you selected).
- 2 Select *New Action > Map*.




- 3 In the *Source* section, select *XPath*.
- 4 Select a part (*Input*, *Output*, *_SystemFault*, or *Project*) from the list, then type the appropriate XPath expression, or use the ECMA Expression Builder to locate the element that you want. Together, the part name and XPath specify the *Source* context for the Map action.
- 5 Repeat [Step 3](#) and [Step 4](#) for the *Target* section.
- 6 If you want more control over mapping, select the *Advanced* (see [“Advanced Mapping Options” on page 309](#)) or *Content Editor* (see [“Transforming Elements with the Content Editor” on page 312](#)) options.

You can click *Apply* to see the effect of the Map action without closing the dialog box. This allows you to make repetitive edits to a Map action and quickly see the results.
- 7 Click *OK*.

Advanced Mapping Options

When you select the *Advanced* option in the *Map* dialog box, the *Advanced* dialog box is displayed. Options that you set in the *Advanced* dialog box only affect the current Map action.

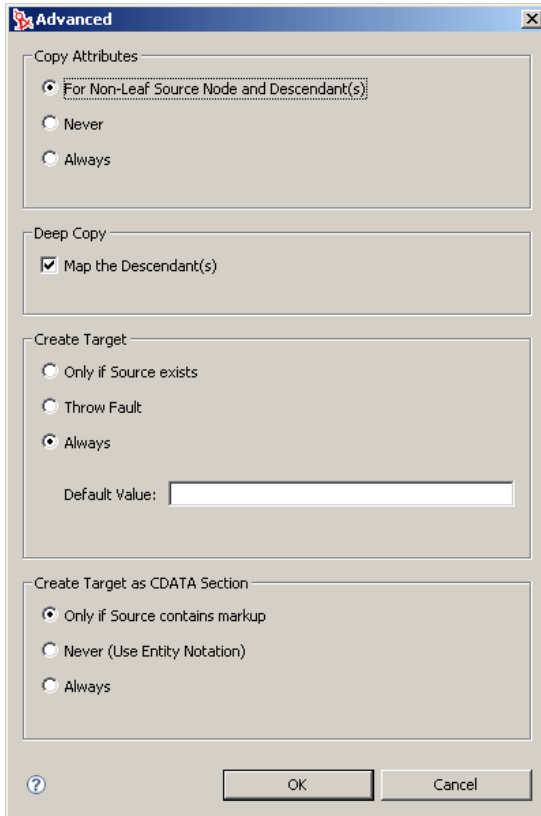Figure 8-10 *Advanced*



The options in this dialog box give you fine control over how input part nodes are mapped to the output part.

This section includes the following topics:

- ◆ [“Copy Attributes” on page 310](#)
- ◆ [“Deep Copy” on page 311](#)
- ◆ [“Create Target” on page 311](#)
- ◆ [“Create Target as CDATA Section” on page 312](#)

Copy Attributes

You use *Copy Attributes* to specify how attributes are mapped. *Copy Attributes* has the following options:

Table 8-6 Copy Attributes Options

Option	Description
<i>For Non-leaf Root Nodes and Dependents</i>	Specifies that when a non-terminal (non-leaf) element is mapped to output, the element (minus its attributes) and its children are mapped to output. Attribute data for the children is included, but not for the original (parent) element.
<i>Never</i>	Specifies that no attribute data (whether for parent or leaf nodes) is carried over during mapping.
<i>Always</i>	Specifies that all attribute data, for all nodes, is mapped to output.

Deep Copy

The default Integration activity behavior is to map whole branches at a time (the target node plus all of its children). This is referred to as a *deep copy*. In some cases, you might want to turn off this behavior so that you can copy just the parent element without its children. Deselect *Map the Dependents* if you want to disable deep copy.

Create Target

You use *Create Target* to create the destination node that you specified in the *Target* group in the Map action (see [“Adding a Map Action” on page 309](#)), based on whether or not the source node is present in the source DOM. By default the Integration activity always creates the target, whether or not the runtime source DOM contains the nodes specified in the Source XPath for mapping.

For example, in the Map action, you might have specified a Source XPath that looks like

```
$Input/Root/MySourceElement
```

In the Target XPath, you might have specified

```
$Output/Root/MyParentNode/SomeOtherElement
```

If the incoming Input document does not have a node corresponding to `Root/MySourceElement`, the Integration activity by default creates an empty `Root/MyParentNode/SomeOtherElement` node in the output DOM. In some cases, this might not be what you want. Using *Create Target* mapping, you can change the default behavior.

Table 8-7 Create Target

Option	Description
<i>Only if Source exists</i>	Specifies that the Map Action is skipped (no target nodes are created in the output DOM) if the node specified in the Source XPath doesn't exist in the input message.
<i>Raise Error</i>	Specifies that if the input document doesn't contain the node specified in the Source XPath, it is considered an error at runtime. You should plan accordingly by wrapping your Map action in a Try/OnError block so that you can handle the error.
<i>Always</i>	Specifies that the target node should always be created (the default behavior). When <i>Always</i> is selected, you can use the <i>Default Value</i> field to specify a default data value for the target element.

Create Target as CDATA Section

You use *Create Target as CDATA* to control the way element data gets mapped into CDATA sections.


Table 8-8 *Create Target as CDATA Section*

Option	Description
<i>Only if source contains markup</i>	Specifies that if the source data contains XML, HTML, or other types of markup in which illegal (in this context) characters are used, the data is placed, unmodified, in a CDATA section in the target DOM. This is the default behavior.
<i>Never</i>	Specifies that source data will not be wrapped in a CDATA section for output. Illegal characters that occur in the source data are converted to escaped entities, such as > for >, on the output side.
<i>Always</i>	Specifies that whatever form the source data takes, it will get wrapped in a CDATA section on output.


Transforming Elements with the Content Editor

You use the Content editor to change the format and content of the input element to match that required by the output element. Using the Content Editor, you can slice the input data into small parts, move the parts to different locations relative to one another, add new parts, omit some parts, and apply functions to individual parts.

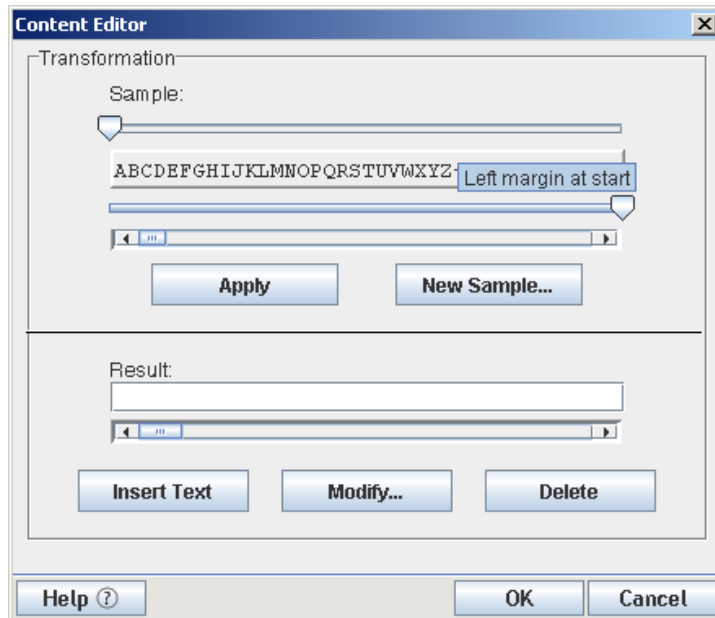- 1 In the Action model, select two elements from different parts (for example, from the Input and Output parts) to map.
- 2 Select *New Action > Map*.
- 3 In the Map action dialog box (see [“Adding a Map Action” on page 309](#)), select the *Content Editor* check box, then select the *Content Editor* button.



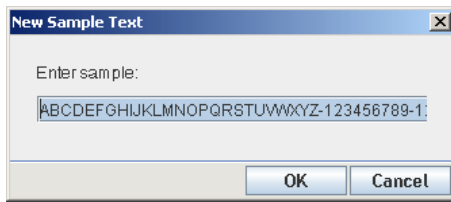- 4 If desired, click *New Sample* and type a sample string.



- 5 Click *OK* to return to the *Content Editor* dialog box.
- 6 In the *Sample* section, move the slider that is above the sample to the position where you want the first cut to take place, then move the slider that is below the sample to the position where you want the end cut to take place.

The sliders determine how to take a substring from the input data.

- 7 Click *Apply*.

The substring is copied to the *Result* field as a separate object.

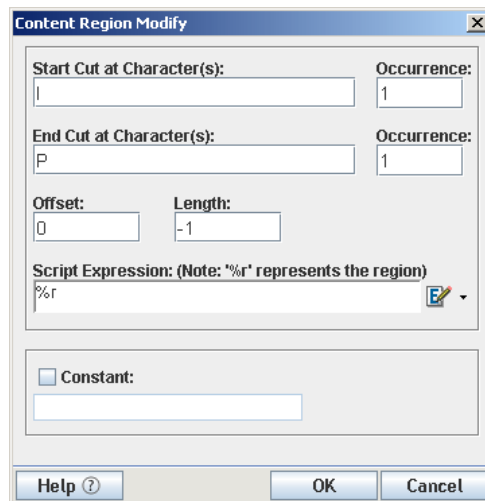
- 8 Repeat [Step 6](#) and [Step 7](#) for each part of the sample in the order that you want.

Using this method, you can build a new string out of substrings of the original input.

- 9 To change the format of an object in the *Result* field:

9a Select an object.

9b Click *Modify*.



The *Start Cut at Characters* field displays the character in the string where the first cut will take place. The first *Occurrence* field displays when the cut will take place. In the previous illustration, the first cut will take place at the first occurrence of the letter l. The *End Cut at Characters* field displays that character in the string where the last cut will take place. The second *Occurrence* field displays when the cut will take place. The *Offset* field displays the number of characters from the beginning of the original string where the object will start. The *Length* field displays the length of the object.

- 9c** If desired, you can write an ECMAScript expression in the *Script Expression* field to modify the content region.

The *%r* shown in the *Script Expression* field is a local variable representing the content region to which you want to apply a function. For example, to apply the `.toUpperCase()` function to the content region, you would write the *Script Expression*: `var test='%r'; test.toUpperCase()`.

- 9d** To assign a constant to an object, select *Constant*, then type a constant string.
- 9e** When you are finished mapping string formats with the Content Editor, click *OK* to save the changes and close the Content Editor.
- 10** Click *OK* to return to the action model.

9 Working with ECMA Expressions

This section provides details on using the ECMA Expression Builder. Topics include:

- ♦ [Section 9.1, “About the ECMA Expression Builder,” on page 315](#)
- ♦ [Section 9.2, “ECMAScript Examples,” on page 323](#)
- ♦ [Section 9.3, “User Application API,” on page 325](#)
- ♦ [Section 9.4, “Role Vault API,” on page 342](#)

9.1 About the ECMA Expression Builder

Designer incorporates an ECMAScript interpreter and expression editor, which allows you create script expressions that refer to and modify workflow data. For example, you can use scripting to:

- ♦ Create new data items needed in a workflow under the flowdata element.
- ♦ Perform basic string, date, math, relational, concatenation, and logical operations on data.
- ♦ Call standard or custom Java classes for more sophisticated data operations.
- ♦ Use expressions for runtime control to:
 - ♦ Modify or override form field labels.
 - ♦ Initialize form field data.
 - ♦ Customize e-mail addresses and content.
 - ♦ Set entitlement grant/revoke rights and parameters.
 - ♦ Evaluate any past activity data to conditionally follow a workflow path by using the Condition activity.
 - ♦ Write different log messages that are conditionally triggered by using a single Log activity.

This section describes some of the techniques and capabilities applicable to the use of scripting.

- ♦ [Section 9.1.1, “About ECMAScript,” on page 316](#)
- ♦ [Section 9.1.2, “ECMAScript Capabilities,” on page 316](#)
- ♦ [Section 9.1.3, “Using the ECMA Expression Builder,” on page 316](#)
- ♦ [Section 9.1.4, “About Java Integration,” on page 319](#)
- ♦ [Section 9.1.5, “About XPath Integration,” on page 320](#)
- ♦ [Section 9.1.6, “About Global Configuration Values Integration,” on page 322](#)
- ♦ [Section 9.1.7, “About Global ECMAScripts Integration,” on page 322](#)
- ♦ [Section 9.1.8, “Performance Considerations,” on page 322](#)

NOTE: To define expressions for a workflow, you need to understand how workflow activities are configured. In addition, you need to understand the various types of data that are available within a workflow. For details on configuring workflow activities, see [Chapter 7, “Workflow Activity Reference,” on page 213](#). For descriptions of the system variables available in a workflow, see [Section 6.5.3, “Understanding Workflow Data,” on page 187](#).

9.1.1 About ECMAScript

ECMAScript is an object-oriented scripting language for manipulating objects in a host environment (in this case, Designer). ECMAScript (ECMA-262 and ISO/IEC 16262) is the standards-based scripting language underpinning both JavaScript (Netscape) and JScript (Microsoft). It is designed to complement and extend existing functionality in a host environment such as Designer’s graphical user interface. As a host environment, Designer provides ECMAScript access to various objects for processing. ECMAScript in turn provides a Java-like language that can operate on those objects.

The extensibility of ECMAScript, and its powerful string-handling tools (including regular expressions), make it an ideal language to extend the functionality of Designer.

NOTE: You can find detailed information about ECMAScript at the [European Computer Manufacturers Association \(ECMA\) Web site \(http://www.ecma-international.org\)](http://www.ecma-international.org).

9.1.2 ECMAScript Capabilities

In addition to enabling you to incorporate finely tuned custom logic into your workflow, scripting gives you a great deal of flexibility in manipulating data because of the various DOM-related and XPath-related objects and methods available in the ECMAScript extensions incorporated into the Expression Builder.

The usefulness of ECMAScript is especially apparent when dealing with in-memory DOMs. The ECMA Expression Builder constructs XML documents as in-memory objects according to the W3C DOM Level 2 specification. The DOM-2 specification, in turn, defines an ECMAScript binding (see the W3C Recommendation [ECMAScript Language Binding \(http://www.w3.org/TR/DOM-Level-2-Core/ecma-script-binding.html\)](http://www.w3.org/TR/DOM-Level-2-Core/ecma-script-binding.html), with numerous methods and properties that provide ready access to DOM-tree contents. The flowdata DOM is recognized by the ECMA Expression Builder, and any of the W3C-defined ECMAScript extensions that apply to DOMs can be used.

ECMAScript also provides bridges to other expression languages such as XPath. This allows you to use XPath syntax on a DOM to address various elements within its document structure.


9.1.3 Using the ECMA Expression Builder

Designer provides access to ECMAScript in various places in the User Application design tools. The most common form of access is through the Expression Builder, which can be displayed whenever you see this button:



The button is found in Designer displays, such as the Properties for a Condition activity or the Data Item Mapping view for an Entitlement Provisioning activity. Click the button to display the ECMA Expression Builder.

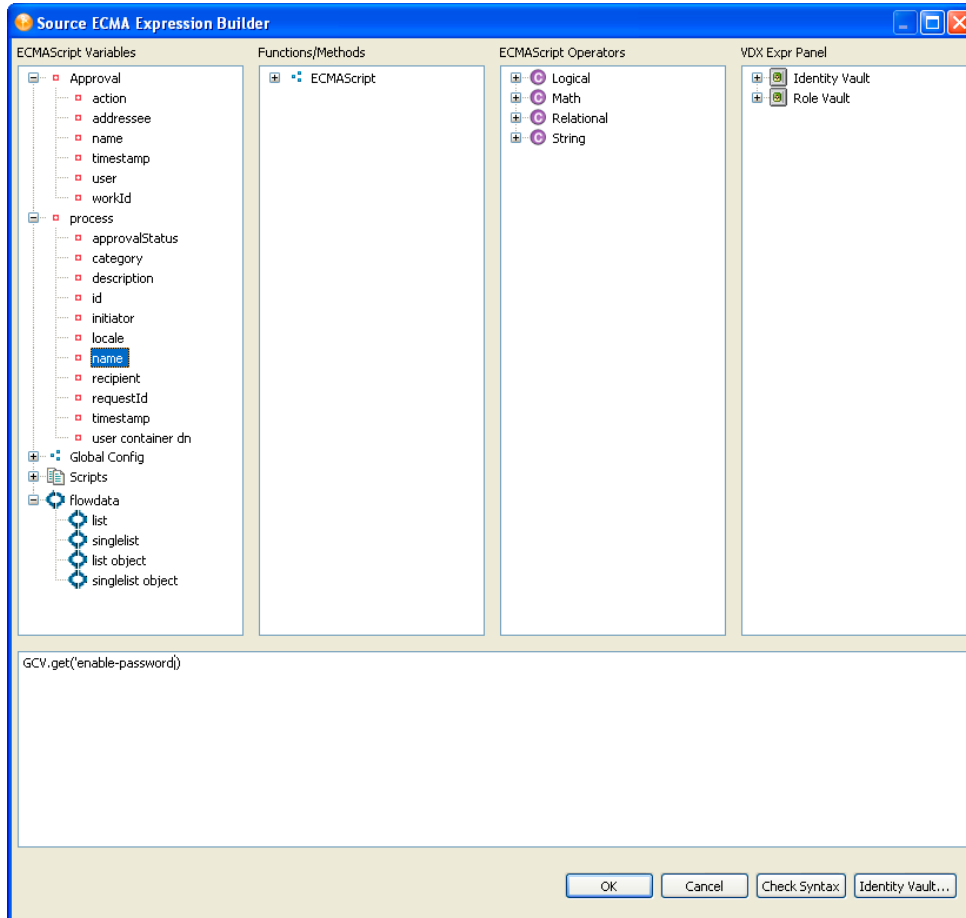Figure 9-1 ECMA Expression Builder



The ECMA Expression Builder provides pick lists of available objects, methods, and properties in the top panes (all of which are resizable), with rollover tooltips to help you build ECMAScript statements. Double-clicking any item in any pick list causes a corresponding ECMAScript statement to appear in the edit pane in the lower portion of the window. In the figure, the *process* pick list has been selected in the *ECMAScript Objects* pane, and the *name* variable has been double-clicked. The ECMAScript expression that can access the contents of this workflow variable is inserted automatically in the edit pane.

This section includes the following topics:

- ◆ [“Checking Syntax” on page 317](#)
- ◆ [“Selecting a DN” on page 318](#)
- ◆ [“ECMAScript Objects” on page 318](#)
- ◆ [“Vault Expressions” on page 318](#)
- ◆ [“Using Special Characters” on page 319](#)

Checking Syntax


The ECMA Expression Builder includes a *Check Syntax* button. Clicking the button causes the ECMAScript interpreter to check the syntax of the expression. If there are problems involving ECMAScript syntax, an error message is displayed. You can then edit the expression and validate again as needed. Validation is optional.

NOTE: The syntax checking process does not execute your expression. It just checks syntax. Because ECMAScript is an interpreted language, syntax checking doesn't check any runtime-dependent expressions, other than to see if they conform to valid ECMAScript syntax.

Selecting a DN

The ECMA Expression Builder also includes an *Identity Vault* button that is displayed when you are working with activities that might require selecting a DN from the Identity Vault (for example, Start, Approval, and Entitlement activities).

Figure 9-2 *Identity Vault Button*



The *Identity Vault* button displays a dialog box that you use to navigate the Identity Vault to select a DN. The *Identity Vault* button is dimmed (to indicate that it is unavailable) if you are not connected to the Identity Vault.

ECMAScript Objects

This pane displays the names of objects that are relevant in the current context. For example, if you are working in the provisioning request definition editor, you see system variables for the current workflow process, system variables for the current activity, and flowdata variables created in the current workflow. Double-click the name of a variable to insert that variable into your script. For descriptions of the system variables available in a workflow, see [Section 6.5.3, “Understanding Workflow Data,”](#) on page 187.

The ECMA Expression Builder provides two methods for reading flowdata variables.

Table 9-1 *Methods for Reading Flowdata Variables*

Method	Description
<code>flowdata.get(variable-name)</code>	Returns a string as the node value for a variable (representing an XPath expression) in the workflow document.
<code>flowdata.getObject(variable-name)</code>	Returns an object as a node value for a variable (representing an XPath expression) in the workflow document. Use this method to retrieve the values of multivalued controls.

Vault Expressions

This pane allows you to insert Entity definitions (see [Section 3.2, “Working with Entities and Attributes,”](#) on page 47) that are defined in the Identity Vault into your scripts. Both system and user-defined entities are available. The format of an expression to retrieve data from the Identity Vault is

```
IDVault.get(dn, object-type, attribute)
```

For example if you want the recipient's manager for a data item, you would open the User node in the Vault Expressions Pane and double-click the Manager item, which inserts `IDVault.get({ enter dn expression here }, 'user', 'manager')`. This expression evaluates to the string for the manager's DN (LDAP distinguished name).

Using Special Characters

You can use special characters in literal strings in the ECMA Expression Builder by using escape sequences. Escape sequences begin with a backslash character (`\`). The following table contains some commonly used escape sequences:

Table 9-2 *Escape Sequences*

Escape Sequence	Character
<code>\b</code>	Backspace
<code>\f</code>	Form feed
<code>\n</code>	New line
<code>\r</code>	Carriage return
<code>\t</code>	Horizontal tab
<code>\"</code>	Double quote
<code>\\</code>	Backslash (<code>\</code>)
<code>\'</code>	Apostrophe

You also can specify any Unicode character by using `\u` followed immediately by four hexadecimal digits. Here are some examples:

Table 9-3 *Escape Sequence Examples for Unicode Characters*

Escape Sequence	Character
<code>\u00A3</code>	Pound symbol (£)
<code>\u20AC</code>	Euro symbol (€)

9.1.4 About Java Integration

Java is integrated into the workflow process through the ECMA Expression Builder, which provides a bridge to external Java objects. To access a Java class through the ECMA Expression Builder, the class must be in the classpath of the workflow engine. To accomplish this, you must add the Java class to the `WEB-INF\lib` directory in the User Application WAR file (`IDM.war`).

NOTE: Unlike ECMAScript that is available in other parts of the provisioning request definition editor, form action scripts are executed on the browser, not the server. All directory access from within a form action script is handled by AJAX calls from the browser to the server. See [Section 9.3.1, “Form Action Script Methods,”](#) on page 326.

- ♦ [“Adding the Java Class to the User Application WAR”](#) on page 320
- ♦ [“Accessing Java from ECMAScript”](#) on page 320

Adding the Java Class to the User Application WAR

- 1 Use a WAR file utility to open the `IDM.war` file. The `IDM.war` file is located in the application server `\server\IDM\` directory.
- 2 Copy the Java class into the `WEB-INF\lib` directory.

Accessing Java from ECMAScript

To access a Java class, create a function inline in the ECMA Expression Builder. Instantiate the function, then within the function, use ECMAScript syntax to call your Java methods. The following example creates a vector:

```
function list() { v=new java.util.Vector(); v.add('{Enter Item 1}'); v.add('{Enter Item 2}'); return v; }; list();
```

To access a custom Java class, you must preface the class name with “Packages”. For example:

```
v = new Packages.com.novell.myClass("value");
```

The ECMA Expression Builder is built on Mozilla Rhino. Rhino is an open source implementation of JavaScript written entirely in Java. For more information about accessing Java from ECMAScript, see [Scripting Java \(http://www.mozilla.org/rhino/ScriptingJava.html\)](http://www.mozilla.org/rhino/ScriptingJava.html).

9.1.5 About XPath Integration

This section includes the following topics:

- ♦ [“XPath in Workflows”](#) on page 320
- ♦ [“XPath in Integration Activities”](#) on page 321

XPath in Workflows

A provisioning request definition workflow supports a special object called *flowdata* (see [Section 6.5.3, “Understanding Workflow Data,”](#) on page 187). The *flowdata* object is a DOM (an XML document constructed as an object in memory). You can use XPath syntax to navigate the structure of the *flowdata* DOM, and add, modify, or delete elements and contents.

To add an object to *flowdata*:

Syntax

```
flowdata.{arguments}
ECMAScript    XPath
```

Examples

```
flowdata.parent/child[1]
flowdata.reason
```

To get an object from *flowdata*:

Syntax	Examples
<pre> flowdata.get{arguments} ECMA Script XPath </pre>	<pre> flowdata.getObject('parent/child[1]') flowdata.get('reason') </pre>

For information about the `flowdata.get()` and `flowdata.getObject()` methods, see [Table 9-1 on page 318](#).

XPath in Integration Activities

When you are working with an Integration activity, the ECMAScript interpreter recognizes a custom method called `XPath()`. This method allows expressions such as:

```
Input.XPath("GetBNQuoteSoapIn/GetBNQuote/sISBN")
```

When you use the ECMA Expression Builder, this type of expression is built for you automatically when you select nodes in ECMA Expression Builder pick lists.

The Integration activity uses the XPath addressing syntax adopted by W3C. The XPath syntax is similar to URL address syntax but includes many subtle and powerful features for addressing and manipulating XML. Some of the more common syntax rules are listed in the following table.

Table 9-4 XPath Syntax

XPath Syntax	Description
/	The single forward slash represents an absolute path to an element. For example, <code>/ABC</code> selects the root element ABC.
//	Double slashes represent all elements in a path. <code>//ABC</code> selects all occurrences of ABC. For example, <code>//ABC//DEF</code> selects all DEF elements that are children of ABC.
*	The asterisk selects all elements located by the preceding path. For example, <code>*ABC/DEF</code> selects all elements enclosed by elements ABC/DEF. <code>//*</code> selects all elements.
[]	Square brackets specify a particular element. For example <code>/ABC[3]</code> selects the third element in ABC. This can also be used as a filter (similar to a Where clause in SQL). <code>//ABC["Table"]</code> selects all elements that have the content "Table."
@	The At sign selects elements with a specified attribute. For example, <code>/ABC@name</code> selects all elements in ABC that have an attribute called name.
	The vertical bar allows you to specify multiple paths. For example, <code>//ACB //DEF</code> selects all elements in ACB and in DEF.
\$	The dollar sign allows you to reference other documents in addition to the current one: <code>INVOICEBATCH/INVOICE[SELLER/NAME=\$PROJECT/USERCONFIG/COMPANYNAME]</code>
function()	XPath has numerous functions that you can add to your XPath addresses. For example, <code>//*[count(*)=2]</code> selects all elements that have two children.
math operator()	XPath has numerous math operators that you can add to your XPath addresses. For example, <code>/ABC[position() mod 2 = 0]</code> selects all even elements in ABC.

You can find the complete list of operators in the W3 Recommendation [XML Path Language \(XPath\)](http://www.w3.org/TR/xpath.html) (<http://www.w3.org/TR/xpath.html>).

9.1.6 About Global Configuration Values Integration

Global configuration values (GCVs) are settings that are similar to driver parameters. Global configuration values can be specified for a driver set, as well as for an individual driver. If a driver does not have a GCV, the driver inherits the value for that GCV from the driver set.

GCVs are integrated with the workflow process through the ECMA Expression Builder, which provides a bridge to the GCVs from the driver and the GCV resource objects. To access a GCV through the ECMA Expression Builder, go to the variables pane and select any GCV from the GCV list. For GCV resource objects to be available on the variable pane, ensure that they are linked to the User Application driver. These GCVs are available to you in all activities on the workflow and not on the forms.

NOTE

- ◆ When you create a GCV of the type password-ref (Named Password), ensure that you create the GCV on the specific driver itself and *not* on the driver set.
 - ◆ If you include a password-ref GCV in a workflow, you must also create and include a separate Boolean GCV named `allow-fetch-named-passwords` and set the value of that GCV to `true`. If you do not include the second Boolean GCV, the workflow fails with a scripting error.
-

9.1.7 About Global ECMAScripts Integration

ECMAScripts that are globally available on the User Application drivers or within the Identity Vault libraries can be accessed through the Expression Builder. Ensure that ECMA Scripts are imported into the provisioning request definition from the Overview page. For more information about creating provisioning request definitions, see [Chapter 4, “Configuring Provisioning Request Definitions,”](#) on page 83.

The global ECMAScripts are available throughout all your activities and on the forms. For making them available, you should include them as necessary on workflow activities, start activity, and forms.

9.1.8 Performance Considerations

ECMAScript is an interpreted language, which means that every line of script in an expression must be parsed and translated to the Java equivalent before it can be executed. This adds considerable overhead to the code and results in overall slower execution of scripts than pure Java. Before using ECMAScript, you should think about the possible performance consequences.

The following guidelines help you to achieve optimal performance in your components and services:

- ◆ Consider whether a task can be accomplished by using a custom Java class (that you can call from ECMAScript).
- ◆ When you need the fine control offered by scripting, use ECMAScript.

Bear in mind that the key to good performance is always a good implementation (for example, choosing the correct algorithm and attention to reuse of variables). Good code written in a slow language often outperforms bad code written in a fast language. Writing something in Java does not

guarantee that it will be faster than the equivalent logic written in ECMAScript because Java has its own overhead constraints, such as constructor call-chains (when you call a constructor for a Java object that inherits from other objects, the constructors for all ancestral objects are also called).

ECMAScript's core objects (String, Array, Date, etc.) have many built-in convenience methods for data manipulation, formatting, parsing, sorting, and conversion of strings and arrays. These methods are implemented in highly optimized Java code inside the interpreter. It is to your advantage to use these methods whenever possible, rather than creating customized data-parsing or formatting functions. For example, suppose you want to break a long string into substrings, based on the occurrence of a delimiter. You could create a loop that uses the String methods `indexOf()` and `substring()` to parse out the substrings and assign them to slots in an array. But this would be a very inefficient technique when you could simply do the following:

```
var myArrayOfSubstrings = bigString.split( delimiter );
```

The ECMAScript String method `split()` breaks a string into an array of substrings based on whatever delimiter value you supply. It executes in native Java and requires the interpreter to interpret only one line of script. Trying to do the same thing with a loop that iteratively calls `indexOf()` and `substring()` would involve a great deal of needless interpreter and function-call overhead, with the accompanying performance hit.

Skillful use of built-in ECMAScript methods pays worthwhile performance dividends. If you use scripts extensively, take time to learn about the fine points of the ECMAScript language because this can help you eliminate performance bottlenecks.

9.2 ECMAScript Examples

This section provides examples of common operations that you can perform using ECMAScript.

- ♦ [Section 9.2.1, "General Examples," on page 323](#)
- ♦ [Section 9.2.2, "Flowdata Examples," on page 323](#)
- ♦ [Section 9.2.3, "Form Control Examples," on page 324](#)
- ♦ [Section 9.2.4, "Error Handling," on page 325](#)

9.2.1 General Examples

To create a function in the ECMA Expression Builder, create the function inline:

```
function abc() { var v1 = "" ; for ( i = 0 ; i < 9 ; i++) v1 += "$" ; return v1 ; } ;  
abc() ;
```

9.2.2 Flowdata Examples

This section presents scripting examples that show the use of the flowdata object.

- ♦ ["Getting the Value of a Flowdata Variable" on page 324](#)
- ♦ ["Creating an XML Element with Child Element and Adding it to the Flowdata" on page 324](#)

Getting the Value of a Flowdata Variable

Suppose you entered information about an approval status into the flowdata by creating an XML element named `start_reason` with a child element named `approval_reason` and an attribute named `ApprovalStatus`. Use the following expression in a pre-activity map to retrieve the value of the `ApprovalStatus` attribute:

```
flowdata.get('start_reason/approval_reason/@ApprovalStatus')
```

You can enter this expression by expanding the *flowdata* nodes in the ECMAScript Objects pane of the ECMA Expression Builder and double-clicking the `ApprovalStatus` attribute.

Creating an XML Element with Child Element and Adding it to the Flowdata

You can add information to the flowdata so that it can be used by a downstream activity. Use the following expression in a post-activity map:

```
flowdata.start_reason/approval_reason/@ApprovalStatus
```

9.2.3 Form Control Examples

This section presents several examples of scripting with form controls.

- ♦ [“Retrieving the Value of a Form Field” on page 324](#)
- ♦ [“Getting an Individual Value from a Multivalued Control” on page 324](#)
- ♦ [“Populating a List or Check Box Item” on page 324](#)
- ♦ [“Comparing DNSs” on page 325](#)

Retrieving the Value of a Form Field

Suppose you have a form field named `ApprovalStatus`. To get the value of this field, use the following expression in a pre-activity map:

```
process.getApprovalStatus()
```

You can enter this expression by opening the `process` node in the ECMAScript Objects pane of the ECMA Expression Builder and double-clicking *approvalStatus*.

Getting an Individual Value from a Multivalued Control

To get an individual value from a multivalued control (for example, a check box named *colors*), you first need to get the control into the flowdata. In the post-activity mapping for an upstream activity, use the following:

```
flowdata.colors
```

To get a value from *colors* (for example, the first value), use the following expression on a downstream activity:

```
flowdata.getObject('colors[1]')
```

Populating a List or Check Box Item

To populate list controls (for example, `PickList` or `MVEditor`) or the `MVCheckbox` control by using script, use an expression like this in the pre-activity mapping:

```
function list() {var l=new java.util.Vector();l.add('Blue');l.add('Red');
l.add('Green'); return l;} list();
```

Comparing DNs

To compare DNs to find out if they are equal, use an expression like this:

```
if ( IDVault.DNcompare(flowdata.get('Activity3/CardRequest/Candidate'),recipient
)) true; else false ;
```

This comparison is case-insensitive. For example, the following DNs, when compared with DNCompare, returns True:

```
CN=jdoe,ou=users,ou=idmsample,o=acme
cn=JDOE,ou=users,ou=idmsample,o=acme
```

9.2.4 Error Handling

The approach to handling errors differs between pre-activity and post-activity maps. For post-activity maps, you can use an error flow path from an Approval or Condition activity to catch errors that occur during post-activity mapping. This approach doesn't work for pre-activity maps because any errors that occur in the process of getting data happen before the form is displayed to the user. When this occurs, an error message similar to the following appears in place of form controls in the bottom portion of forms displayed to the user:

```
XXXX FAILED to generate form due to: No data items are available!
```

In this scenario, you can use a try-catch statement in a source expression for a field in a pre-activity map:

```
function getData()
{
    var theData;
    try {
        theData = IDVault.get( 'cn=jsmith,ou=users,ou=idmsample1,o=acme' , 'user',
'FirstName') + ' ' + IDVault.get ( 'cn=jsmith,ou=users,ou=idmsample1,o=acme' ,
'user', 'LastName');
    }
    catch (error) { theData = 'Error retrieving data.'; }
    return theData;
};
getData();
```

9.3 User Application API

This section includes information on the following topics:

- ♦ [Section 9.3.1, “Form Action Script Methods,” on page 326](#)
- ♦ [Section 9.3.2, “IDVault Functions,” on page 336](#)
- ♦ [Section 9.3.3, “nrRequest Properties and Methods,” on page 337](#)

9.3.1 Form Action Script Methods

Unlike the ECMAScript that runs in other components of the workflow, form script executes on the Web browser, not the server. All directory access from within form script is handled by AJAX calls from the browser to the server.

This section lists all form action methods and properties supported by the ECMA Expression Builder.

- ♦ [“Form” on page 326](#)
- ♦ [“Field” on page 331](#)
- ♦ [“Event” on page 333](#)
- ♦ [“Lists” on page 334](#)
- ♦ [“Queries” on page 334](#)
- ♦ [“Container” on page 335](#)

Form

Lets you work with Form methods.

- ♦ [“focus\(fieldname\)” on page 326](#)
- ♦ [“select\(fieldname\)” on page 327](#)
- ♦ [“activate\(fieldname\)” on page 327](#)
- ♦ [“setRequired\(fieldname, is-required\)” on page 327](#)
- ♦ [“InterceptAction\(actionname, order, function\)” on page 327](#)
- ♦ [“getLocale\(\)” on page 327](#)
- ♦ [“getRBMessage\(\)” on page 328](#)
- ♦ [“stringToDate\(\)” on page 328](#)
- ♦ [“dateToString\(\)” on page 328](#)
- ♦ [“isValidDate\(date\)” on page 328](#)
- ♦ [“isValidDate\(date,include-time\)” on page 328](#)
- ♦ [“alert\(string\)” on page 328](#)
- ♦ [“showMsg\(string\)” on page 328](#)
- ♦ [“showWarning\(string\)” on page 329](#)
- ♦ [“showError\(string\)” on page 329](#)
- ♦ [“showFatal\(string\)” on page 330](#)
- ♦ [“enable\(fieldname\)” on page 330](#)
- ♦ [“disable\(fieldname\)” on page 330](#)
- ♦ [“getValue\(fieldname\)” on page 330](#)
- ♦ [“getValues\(fieldname\)” on page 330](#)
- ♦ [“setValues\(fieldname\)” on page 331](#)

focus(fieldname)

`form.focus(fieldname)`

Sets the focus to the specified field. For list-based or choice-based controls, sets the focus to either the selected choice or when no selection is made, it sets the focus to the first choice. If a fieldname parameter is passed and that field is list or choice based, it sets the focus on the choices corresponding to the values parameter. If the value is an array, only the first value is used to determine on which check box or radio button to set focus. If the specified field is invisible or disabled, this method has no effect.

select(fieldname)

```
form.select(fieldname)
```

If no values parameter is passed in, this method sets the focus to the underlying text field. For list-based or choice-based controls, this method sets the focus to the selected choice or if no selection was made, to the first choice. If a values parameter is passed and the field is list-based or choice-based it sets the focus on the choices corresponding to the fieldname parameter. This method has no effect on disabled or invisible fields.

activate(fieldname)

```
form.activate(fieldname)
```

A combination of setFocus() and select().

setRequired(fieldname, is-required)

```
form.setRequired("fieldname", is-required)
```

Sets the field to required if is-required is True; otherwise, the field is optional. A field that is required blocks the form submission if the field is empty.

InterceptAction(actionname, order, function)

```
form.interceptAction("actionname", "order", "function")
```

Allows you to intercept the script attached to an action button. The function passed in is executed based on the order parameter.

Valid actionname values are SubmitAction and CancelAction.

The choices for actionname for an approval form are: ApprovalAction, RefusalAction, DenyAction, UpdateAction, CancelAction and CommentAction.

Valid values for the advice parameter are:

Before: The function is called before the script attached to the button executes.

after: The function is called after the script attached to the button executes.

around: The function is passed a parameter that allows you to decide whether to execute the script attached to the button. The following example shows the submit action intercepted. The form is only submitted if the user replies Yes.

```
window.inv=function(invocation) { if (confirm("Are you sure you want to submit?")) { var result = invocation.proceed(); return result; }; };  
form.interceptAction("SubmitAction", "around", window.inv);
```

getLocale()

```
form.getLocale()
```

Returns the current locale. Can be used as input for all methods that support a locale parameter.

getRBMessage()

```
form.getRBMessage(key)
form.getRBMessage(key, value[s])
form.getRBMessage(key, value[s], bundle)
```

This method tries to find an entry with key in the resource bundle with ID bId. The resourcebundle Java class should extend the java.util.ListResourceBundle.Parameter. The parameter can be used to pass in replacements for parameters ({0}, {1}, etc) in message "msg"; for example:

```
var msg = frm.getRBMessage ("mykey", ["value0", "value1"], "mybundle");
```

stringToDate()

```
form.stringToDate(date)
form.stringToDate(date, include-time)
```

Converts a date string to a Date. The format must correspond to the dateform for the current locale, as used in the DatePicker. The value of a DatePicker control can be converted with this method.

Example:

```
form.showMsg ("Date="+form.stringToDate(d,true));
```

dateToString()

```
form.dateToString(date)
form.dateToString(date, include-time)
```

Converts a date to a string that can be stored in the DatePicker, for example:

```
var d = form.dateToString(new Date(), true);
form.setValues("hireDate", d);
```

isValidDate(date)

```
form.isValidDate(date)
```

Use this to validate the correct format for a date string.

isValidDate(date,include-time)

```
form.isValidDate(date, include-time)
```

Use this to validate the correct format for a date string.

alert(string)

```
form.alert("msg")
```

Displays a message in an alert box.

showMsg(string)

```
form.showMsg(msg, param, bId)
```


Adds a message to the status portion of the form. The `msg` string parameter can either contain the text of the message itself or it can contain a key pointing to an entry in the resource bundle `bId`. This method always tries to find an entry with the key `msg` in the resource bundle with the id `bId`. The `param` parameter can be used to pass in replacements for stakeholders (`{0}`, `{1}`, etc) in `msg`.

NOTE: If you want to add debugging messages to your script, it is better practice to use `form.showDebugMsg()`.

Example:

```
form.showMsg("my message" {0},{1}", ["value0","value1"]);
```

showWarning(string)

```
form.showWarning(msg, param, bId)
```

Adds a warning to the status portion of the form.

The `msg` string parameter can either contain the text of the warning itself or it can contain a key pointing to an entry in the resource bundle `bId`. This method always tries to find an entry with the key `msg` in the resource bundle with the id `bId`. The `param` parameter can be used to pass in replacements for stakeholders (`{0}`, `{1}`, etc) in `msg`.

NOTE: If you want to add debugging messages to your script, it is better practice to use `form.showDebugMsg()`.

Example:

```
form.showWarning("my warning" {0},{1}", ["value0","value1"]);
```

showError(string)

```
showError(msg, param, bId);
```

Adds an error message to the status portion of the form.

The `msg` string parameter can either contain the text of the error itself or it can contain a key pointing to an entry in the resource bundle `bId`. This method always tries to find an entry with the key `msg` in the resource bundle with the id `bId`. The `param` parameter can be used to pass in replacements for stakeholders (`{0}`, `{1}`, etc) in `msg`.

NOTE: If you want to add debugging messages to your script, it is better practice to use `form.showDebugMsg()`.

Both normal and fatal errors block form submission. The distinction between a normal error and a fatal error is that normal errors get reset just before form validation occurs (because of a form submission). Fatal errors are remembered and therefore block the form submission unless you restart. A normal error only blocks submission if it is generated during the validation phase. If you add normal errors during onload or custom events, they are lost when the form is submitted.

NOTE: If you want to add debugging messages to your script, it is better practice to use `form.showDebugMsg()`.

Example:

```
form.showError("my error" {0},{1}", ["value0","value1"]);
```

showFatal(string)

```
form.showFatal("my fatal" {0},{1}", ["value0","value1"]);
```

Adds a fatal error message to the status portion of the form.

The msg string parameter can either contain the text of the fatal error itself or it can contain a key pointing to an entry in the resource bundle bId. This method always tries to find an entry with the key msg in the resource bundle with the id bId. The param parameter can be used to pass in replacements for stakeholders ({0}, {1}, etc) in msg.

Both normal and fatal errors block form submission. The distinction between a normal error and a fatal error is that normal errors get reset just before form validation occurs (because of a form submission). Fatal errors are remembered and therefore block the form submission unless you restart. A normal error only blocks submission if it is generated during the validation phase. If you add normal errors during onload or custom events, they are lost when the form is submitted.

NOTE: If you want to add debugging messages to your script, it is better practice to use `form.showDebugMsg()`.

Example:

```
form.showFatal("my fatal" {0},{1}", ["value0","value1"]);
```

enable(fieldname)

```
form.enable("fieldname")
```

Enables a field on a form.

disable(fieldname)

```
form.disable("fieldname")
```

Disables a field on a form.

NOTE: A disabled field still sends data back to the workflow engine. The content of a disabled field is validated when submitting the form or when calling the `field.validate()` method.

getValue(fieldname)

```
form.getValue("fieldname")
```

Returns the first value for the field. The type returned is always string, independent of the data type of the field. If the field does not have a value, the method returns an empty string if text can be entered into the field (like Text, TextArea, DatePicker, DNLookup) or it returns "undefined" if the control is choice-based (for example, StaticList, radio buttons, check boxes). For DN type controls, this method always returns the DN and never the display expression.

getValues(fieldname)

```
form.getValues("fieldname")
```

Returns a string array containing the values. If no values are found, the array is empty (size = 0). For DN type controls, this method always returns the DN and never the display expression.

setValues(fieldname)

```
form.setValues("fieldname", data-values, display values, KeepOldValues)
```

Sets a value. Supports multiple values. This method allows changing the available entries for list-based controls (for example, StaticList, MVCheckbox, PickList). By default, existing values are deleted unless the KeepOldValues parameter equals True. For non-list-based controls, the display values parameter is ignored.

Field

Lets you work with Field methods.

- ◆ [“activate\(\)” on page 331](#)
- ◆ [“disable\(\)” on page 331](#)
- ◆ [“enable\(\)” on page 331](#)
- ◆ [“fireEvent\(\)” on page 332](#)
- ◆ [“focus\(\)” on page 332](#)
- ◆ [“getLabel\(\)” on page 332](#)
- ◆ [“getName\(\)” on page 332](#)
- ◆ [“getValue\(\)” on page 332](#)
- ◆ [“hide\(\)” on page 332](#)
- ◆ [“getValues\(\)” on page 332](#)
- ◆ [“show\(\)” on page 332](#)
- ◆ [“select\(\)” on page 333](#)
- ◆ [“setRequired\(\)” on page 333](#)
- ◆ [“setValues\(fieldname\)” on page 333](#)
- ◆ [“validate\(\)” on page 333](#)

activate()

```
field.activate(value[s])
```

This method is a combination of field.focus() and field.select().

disable()

```
field.disable()
```

Disable the field.

NOTE: A disabled field still sends data back to the workflow engine. The content of a disabled field is validated when submitting the form or when calling the field.

enable()

```
field.enable()
```

Enable the field.

fireEvent()

```
field.fireEvent ("eventname")
```

Fires a custom event. Passes the name of the custom event that is fired. To get the values of the event that is fired, use `form.getValues(event.getOrigin())`.

focus()

```
field.focus (value [s])
```

If no values parameter is passed in, this method sets the focus to the underlying text field. For list-based or choice-based controls, this method sets the focus to the selected choice if no selection was done to the first choice. If a values parameter is passed and if the field is list-based or choice-based, this method sets the focus on the choices corresponding to the values parameter. If the values parameter is an array, only the first value is used to determine the check box or radio button to set focus. This method has no effect on disabled or invisible fields.

getLabel()

```
field.getLabel ()
```

Gets the label associated with the field. If no label is found, this method returns the name of the field.

getName()

```
field.getName ()
```

Gets the name of the field.

getValue()

```
field.getValue ()
```

Returns the first value for the field. The type returned is always a string, independent of the data type of the field. If the field does not have a value, the method returns an empty string if text can be entered into the field (like Text, TextArea, DatePicker, DNLookup) or it returns "undefined" if the control is choice-based (for example, StaticList, radio buttons, check boxes). For DN type controls, this method always returns the DN and never the display expression.

hide()

```
field.hide ()
```

Hides this field.

getValues()

```
form.getValues ()
```

Returns a string array containing the requested values. If no values are found, the array is empty (size = 0). For DN type controls, this method always returns the DN and never the display expression.

show()

```
field.show ()
```

Shows this field.

select()

```
field.select (value [s])
```

If no values parameter is passed in, this method sets the focus to the underlying text field. For list-based or choice-based controls, it sets the focus to either the selected choice or if no selection was made, it sets the focus to the first choice. If a values parameter is passed and if the field is list-based or choice-based, it sets the focus on the choices corresponding to the values parameter. If the value parameter is an array, only the first value is used to determine which check box or radio button to set focus on. This method has no effect on disabled or invisible fields.

setRequired()

```
field.setRequired (is-required)
```

Sets the field to required if isRequired is True or optional otherwise. A field that is required blocks the form submission if it is empty.

setValues(fieldname)

```
field.setValues (data-values, display-values, KeepOldValues)
```

Sets a value. Supports multiple values. This method allows changing the available entries for list-based controls (for example, StaticList, MVCheckbox, PickList). By default, existing values are deleted unless the KeepOldValues parameter equals True. For non-list-based controls, the display values parameter is ignored.

If you want to set or change the initial value of a field, you should do so in an onload event.

NOTE: This method triggers the onchange event for the field.

Examples:

```
field.setValues ("cn=jdoe,ou=users,ou=mysample,o=novell"); // for a DNLookup
field.setValues (["jdoe@novell.com", "test@novell.com"]) // for an MVEditor
field.setValues (["W", "B"], ["White", "Black"], true); // for a StaticList
```

validate()

```
field.validate()
```

Triggers browser validation for the field. To validate the data entered in this field as soon as the user navigates to another field, call this method in the onchange event. Returns True if validation errors were detected; otherwise, returns False.

.

Event

Lets you work with events. This section includes the following methods:

- ♦ [“getEventName\(\)” on page 334](#)
- ♦ [“getOrigin\(\)” on page 334](#)
- ♦ [“getValue\(\)” on page 334](#)
- ♦ [“getValues\(\)” on page 334](#)

getEventName()

```
event.getEventName()
```

Returns the name of the event.

getOrigin()

```
event.getOrigin()
```

Returns the name of the field from which the event was triggered.

getValue()

```
event.getValue()
```

Returns a string that contains the first value in the event.

You should not use the value that is returned by this method, because it is possible that a user might have modified the data in the field after the event was triggered. Instead, you should use the value returned by the `form.getValue` method. For example, `form.getValue(event.GetOrigin())`. This ensures that you get the current value of the field. If you select `event.getValue()` from the pick list in the ECMA Expression Builder, `form.getValue(event.GetOrigin())` is inserted.

getValues()

```
event.getValues()
```

Returns an array of strings that contains all values in the event.

You should not use the value that is returned by this method, because it is possible that a user might have modified the data in the field since the event was triggered. Instead, you should use the value returned by the `form.getValues` method. For example, `form.getValues(event.GetOrigin())`. This ensures that you get the current value of the field. If you select `event.getValues()` from the pick list in the ECMA Expression Builder, `form.getValues(event.GetOrigin())` is inserted.

Lists

Lets you work with lists.

globalList(fieldname, key, locale)

```
IDVault.globalList("fieldname", "key", "locale")
```

Retrieves a global list from the directory abstraction layer, identified by the key of the global list. If the field name is specified, the result of the query is used to refresh the content of the field. To retrieve a list without storing the result in a field, use a null value for the fieldname parameter.

The locale is optional. If locale is not specified, the locale in the HTTP request is used.

Example:

```
IDVault.globalList("dallist", "departments", "en");
```

Queries

Lets you work with queries.

globalQuery(fieldname, key, param)

```
globalQuery(fieldname, key, param)
```

Executes the predefined directory abstraction layer query key (see “[Queries General Properties](#)” on page 79). If the field name is specified, the result of the query is used to refresh the content of the field. To retrieve a list without storing the result in a field, use a null value for the fieldname parameter.

The param parameter is used as input to the query. The parameter has the form {parname1:value,parname2:value}, in which the value can be an individual value or an array. The first column of the result list (always a DN) is used for the data value, and the second column is used for the display label.

Example:

```
IDVault.globalQuery("canchangepwd", "getsites"); // query without a parameter
IDVault.globalQuery("building", "getbuildings", {site:form.getValue("site")}); //
query with one parameter
IDVault.globalQuery("room", "getrooms", {site:form.getValue("site"),
building:form.getValue("building")}); // query with two parameters
```

Container

Lets you work with containers.

containers(fieldname, rootdn, Search scope, Show DN)

```
IDVault.containers("test", rootdn, SearchScope, ShowDN)
```

Gets a list of containers, with the scope equal to “subtree” or the same level. The method returns an array with two entries, the first an array with the resulting DNs; the second entry an array with the display labels.

Table 9-5 Container Parameters

Parameter	Description
fieldname	If the field name is specified, the result of the query is used to refresh the content of the field. To retrieve a list without storing the result in a field, use a null value for the fieldname parameter.
rootdn	If the rootdn parameter is empty, the root container for the default entity is used.
scope	If the scope parameter is empty, one-level is used. Valid choices for scope are “o” (onelevel) and “s” (subtree).
showdn	If the parameter showDN is true, the full DN is used for the display label. Otherwise the naming part (for example, ou, dc) is displayed.

Example:

```
IDVault.containers("assetProp2", null, "o", true); // set the entries in a
StaticList to all containers directly under the root DN of the default entity
```

9.3.2 IDVault Functions

This section lists functions that are used with IDVault data.

- ♦ “DNCompare” on page 336
- ♦ “get()” on page 336
- ♦ “execService()” on page 336

DNCompare

```
DNcompare(String dn1, String dn2)
```

Performs a case-insensitive comparison of DNs from the Identity Vault. Returns True if the DNs are the same.

A DN encapsulates a distinguished name (an LDAP name with context). The syntax of the DNs must conform to that specified in RFC 2253, which describes the String representation of DNs. The following DNs are all valid for use with DNCompare (and would return True if compared):

```
cn=jdoe,ou=users,ou=idmsample,o=acme
CN=jdoe,ou=users,ou=idmsample,o=acme
cn=JDOE,ou=users,ou=idmsample,o=acme
```

For more information about RFC 2253, see [RFC 2353 \(http://www.ietf.org/rfc/rfc2253.txt\)](http://www.ietf.org/rfc/rfc2253.txt).

Example:

```
if ( IDVault.DNcompare(flowdata.get('Activity3/CardRequest/Candidate'), recipient
)) true; else false ;
```

get()

```
get ()
```

```
get (fieldname)
```

```
get (fieldname, dn)
```

```
get (fieldname, dn, entity-type)
```

```
get (fieldname, dn, entity-type, attribute)
```

This corresponds to the IDVault.get() function of the workflow script engine. Retrieves the values of the attribute for the given entity. The result is an array of values. If the field parameter is specified the result of the query result is used to refresh the content of the field. If not, the result is up to the form developer to use the result of the query. Example:

```
IDVault.get ("assetProp", dn, "user", "LastName") ;
```

execService()

```
IDVault.execService(service)
```

```
IDVault.execService(service, param)
```

```
IDVault.execService(service, param, locale)
```

Executes an AJAX service and the result is used to refresh the content of the field. The service must be registered in the UI control registry. The first column of the result list result is used for the display value, the second one for the data value. Example :


```

var r=IDVault.execService("dnlookup2",params);
var res=r?r["_data"]["raw"][dn]["value"]:"error encountered";

field.setValues("IDVault.execService(\"dnlookup2\") :"+res);

```

9.3.3 nrfRequest Properties and Methods

This section lists functions used with the nrfRequest object in Roles Based provisioning request definitions. It includes:

- ♦ [“Role Request Properties” on page 337](#)
- ♦ [“Role Request Is Methods” on page 338](#)
- ♦ [“Role Request Get Methods” on page 339](#)

Role Request Properties

Table 9-6 Role Request Properties

Property	Code	Description
NEW_REQUEST	0	Set by the User Application on a newly created nrfRequest object.
SOD_APPROVAL_START_PENDING	2	The Role Service driver attempts to start the SoD workflow again. This is used for requests in the SOD_APPROVAL_START_SUSPENDED mode.
SOD_APPROVAL_START_SUSPENDED	3	Occurs when the Role Service driver is not able to start an SoD workflow. A driver task then resets these requests to SOD_WORKFLOW_START_PENDING to retry the starting of the workflow.
SOD_EXCEPTION_APPROVAL_PENDING	5	Set by the Role Service driver after successfully initiating an SoD exception workflow.
SOD_EXCEPTION_APPROVED	10	Set by the SoD exception workflow when the exception is approved.
APPROVAL_START_PENDING	12	The Role Service driver attempts to start the workflow. The request must be in APPROVAL_START_SUSPENDED mode.
APPROVAL_START_SUSPENDED	13	Occurs when the Role Service driver is not able to start the approval workflow. A driver task then resets these requests to APPROVAL_START_PENDING to try to start the workflow again.
APPROVAL_PENDING	15	Set by the Role Service driver after successful role assignment workflow.
APPROVED	20	Set by the role assignment workflow when the exception is approved.

Property	Code	Description
ACTIVATION_TIME_PENDING	25	Set by the Role Service driver after obtaining all necessary approvals and the activation time has not yet been reached.
PROVISION	30	Set by the Role Service driver after all the necessary approvals have been approved and the role activation time has been reached.
PROVISIONED	50	Set by the Role Service driver after a role has been provisioned.
PROVISIONING_ERROR	80	Set by the Role Service driver when an error occurred during provisioning/ deprovisioning
SOD_EXCEPTION_DENIED	90	Set by the SoD exception workflow when the exception is denied.
DENIED	95	Set by the role assignment workflow when the exception is approved.
CLEANUP	100	Set when nrfRequest workflow should be cleaned up (deleted). This is intended to be triggered by a batch process some configurable amount of time after the request has either been fulfilled or denied.

Role Request Is Methods

- ♦ [“isAddOperation” on page 338](#)
- ♦ [“isRemoveOperation” on page 338](#)
- ♦ [“isTargetDNaUserDN” on page 338](#)
- ♦ [“isTargetDNaRoleDN” on page 339](#)
- ♦ [“isTargetDNaContainerDN” on page 339](#)
- ♦ [“isTargetDNaGroupDN” on page 339](#)

isAddOperation

Returns True if this is an add operaton. Occurs when the AddedDN is not null.

```
public boolean isAddOperation() throws ActivityException
```

isRemoveOperation

Returns True if this is a remove operation. Occurs when the RemovedDN is not null.

```
public boolean isRemoveOperation() throws ActivityException
```

isTargetDNaUserDN

Returnsn True if the target DN is a user DN.

```
public boolean isTargetDNaUserDN() throws ActivityException
```

isTargetDNaRoleDN

Returns True if the target DN is a role DN

```
public boolean isTargetDNaRoleDN() throws ActivityException
```

isTargetDNaContainerDN

Returns True if the target DN is a container DN

```
public boolean isTargetDNaContainerDN() throws ActivityException
```

isTargetDNaGroupDN

Returns True if this is target DN is a group DN.

```
public boolean isTargetDNaGroupDN() throws ActivityException
```

Role Request Get Methods

- ♦ [“getCN” on page 339](#)
- ♦ [“getCategoryLocaleString” on page 339](#)
- ♦ [“getCompletedWFEmailAddress” on page 340](#)
- ♦ [“getCorrelationId” on page 340](#)
- ♦ [“getDecisionDate” on page 340](#)
- ♦ [“getDescription” on page 340](#)
- ♦ [“getEndDate” on page 340](#)
- ♦ [“getEntityKey” on page 340](#)
- ♦ [“getLocale” on page 340](#)
- ♦ [“getOperation” on page 340](#)
- ♦ [“getRequestDate” on page 340](#)
- ♦ [“getRequester” on page 340](#)
- ♦ [“getStatusLocaleString” on page 341](#)
- ♦ [“getStartDate” on page 341](#)
- ♦ [“getStatusValue” on page 341](#)
- ♦ [“getSourceDN” on page 341](#)
- ♦ [“getSourceDNDisplayName” on page 341](#)
- ♦ [“getTargetDN” on page 341](#)
- ♦ [“getTargetDNDisplayName” on page 341](#)
- ♦ [“getCategoryValue” on page 341](#)

getCN

Returns the CN.

```
public String getCn() throws ActivityException
```

getCategoryLocaleString

Returns the category type localized string.

```
public String getCategoryLocaleString() throws ActivityException
```

getCompletedWFEmailAddress

Gets the completed work flow e-mail address. This is a convenience method for the NrfRequest ECMA script object.

```
public String getCompletedWFEmailAddress()
```

getCorrelationId

Returns the Correlation ID.

```
public String getCorrelationId() throws ActivityException
```

getDecisionDate

Returns the decision date.

```
public Date getDecisionDate() throws ActivityException
```

getDescription

Returns the description.

```
public String getDescription() throws ActivityException
```

getEndDate

Returns the end date.

```
public Date getEndDate() throws ActivityException
```

getEntityKey

Returns the entity key.

```
public String getEntityKey()
```

getLocale

Returns the preferred locale.

```
public Locale getLocale()
```

getOperation

Returns either the Add operation or the Remove operation.

```
public String getOperation() throws ActivityException
```

getRequestDate

Returns the request date.

```
public Date getRequestDate() throws ActivityException
```

getRequester

Returns the requester.

```
public String getRequester() throws ActivityException
```

getStatusLocaleString

Returns the status localized string.

```
public String getStatusLocaleString() throws ActivityException
```

getStartDate

Returns the start date.

```
public Date getStartDate() throws ActivityException
```

getStatusValue

Returns the status int value.

```
public int getStatusValue() throws ActivityException
```

getSourceDN

Returns the source DN.

```
public String getSourceDN() throws ActivityException
```

getSourceDNDisplayName

Returns the source DN display name. This is a Role DN.

```
public String getSourceDNDisplayName() throws ActivityException
```

getTargetDN

Returns the target DN affected by this operation.

```
public String getTargetDN() throws ActivityException
```

getTargetDNDisplayName

Returns the Target DN display name. If it is:

- ♦ If it is a user, it returns first name + last name.
- ♦ If it is a group, it returns the description.
- ♦ If it is a role, it returns the description.
- ♦ If it is a container, it returns the target DN.

```
public String getTargetDNDisplayName()
```

getCategoryValue

Returns the category type int value.

```
public int getCategoryValue() throws ActivityException
```

9.4 Role Vault API

This section describes the Role Vault API.

- ◆ [Section 9.4.1, “About the Role Vault API,” on page 342](#)
- ◆ [Section 9.4.2, “Role Script API Reference,” on page 348](#)
- ◆ [Section 9.4.3, “Role Vault Bean API Reference,” on page 354](#)

9.4.1 About the Role Vault API

The Role Vault API allows you to programmatically access role assignments. It includes a set of methods for reporting on role assignments by container, user, group, or role, and for determining whether a user is in a particular role. You might use this API in conjunction with the Role Request activity to write your own workflow that can:

- ◆ Display the current role assignments for a particular user on a form.
- ◆ Allow the user to request a new role assignment.
- ◆ Verify whether the requested roles have any Separation of Duty (SoD) constraints then perform custom branching based on the existing SoD constraints. If the conflicts are allowed, you could invoke the Role Request activity to complete the assignment. Or, you can build in logic before allowing the user to make a role assignment request.

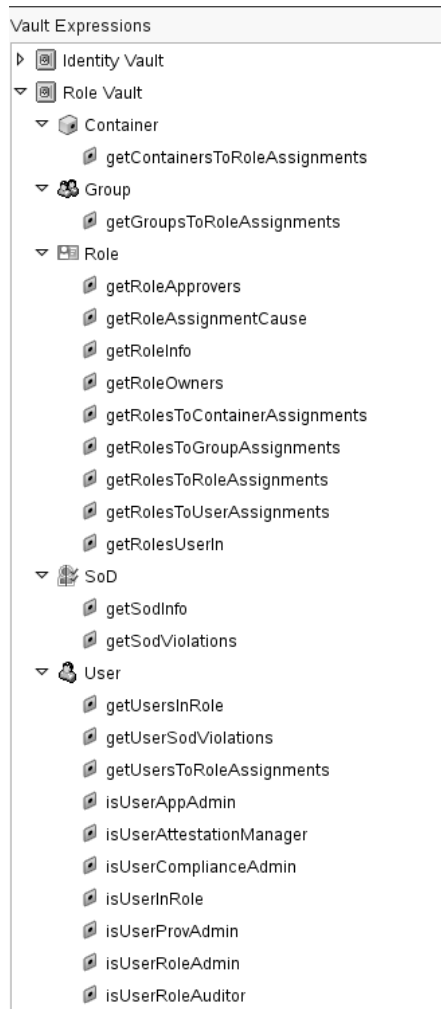
This section includes the following topics:

- ◆ [“Accessing the API” on page 342](#)
- ◆ [“Locale Handling” on page 344](#)
- ◆ [“Security Context” on page 344](#)
- ◆ [“Working with the Role Script API” on page 345](#)

Accessing the API

The Role Vault API is available from both forms and provisioning requests. The method signatures and return values are the same regardless of where they are used. You access the API by using the Expression Builder.

- ◆ In a workflow, you can access the Role Vault API from an activity (such as the Role Request Activity) through the Vault Expressions panel of the Expression Builder.



- ◆ From a form, you access the Role Script API by creating an event on the form and launching the Expression Builder from the event's action expression property. The supported script expressions are available under the Vaults Node in the ECMAScript Objects pane.



Locale Handling

Some methods take a locale as a parameter. If you do not specify a locale, the User Application uses one of the following:

- ◆ The authenticated user's preferred locale when run from a form.
- ◆ The User Application's default locale when run in a workflow.

Security Context

The Role Vault methods run in the following security context:

- ◆ On a form, the security context is that of the currently logged in user.
- ◆ On a workflow, the security context is the LDAP administrator's security context. Because this might return more data than an end user typically has access to, be careful how you display it.

Working with the Role Script API

The Role Script API methods typically return one of four Role Vault Beans objects ([IdentityBeans](#), [RoleAssignmentBeans](#), [RoleBeans](#), and [SodBeans](#)), or one of four Role Vault Bean objects ([IdentityBean](#), [RoleAssignmentBean](#), [RoleBean](#), and [SodBean](#)). A Bean object is a specific entry in the Role Subsystem; for example, IdentityBean can represent a specific user in the Identity Vault. A Beans object is a collection or array of Bean objects; for example, IdentityBeans might contain one or more user objects represented as individual Bean objects. You iterate through the Beans, extracting each Bean and working with it as a specific object. The Beans classes implement the Java Iterable interface, so they allow you to obtain member values directly out of the list of Bean objects as arrays.

- ◆ “Getting the Role” on page 345
- ◆ “Retrieving SoD Violations” on page 346

Getting the Role

This example shows how to use the Beans methods to return a list of member values for the Bean. The expression is used to address the Approval activity to all the user DNs that are assigned to the role. The components of this workflow and their responsibilities are summarized in [Table 9-7, “Sample Workflow for Roles,”](#) on page 345.

Figure 9-3 Sample Workflow for Roles

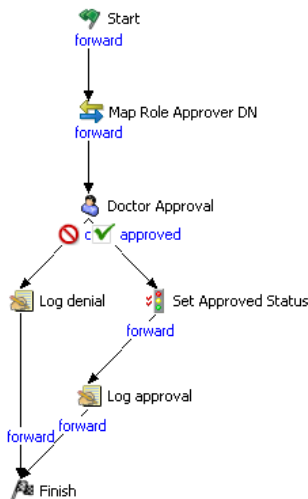


Table 9-7 Sample Workflow for Roles

Activity	Activity Type	Description
Start	Start	Logical starting point for all workflows.
Map Role Approver DN	Mapping	The data item mapping source expression <code>'cn=Doctor-east, cn=Level30, cn=RoleDefs, cn=RoleConfig, cn=AppConfig, ' + PROVISIONING_DRIVER</code> is mapped to the target: <code>flowdata.roledn</code>

Activity	Activity Type	Description
Doctor Approval	Approval	<p>This is where the Role Script API is used to define the addressee for the approval activity. The Addressee property uses this expression:</p> <pre>java.util.Arrays.asList(RoleVault.getUsersToRoleAssignments(flowdata.get('roledn'), true).getTargetDns())</pre> <ul style="list-style-type: none"> The expression <pre>RoleVault.getUsersToRoleAssignments(flowdata.get('roledn'), true)</pre> returns the RoleAssignmentBeans The method call <pre>getTargetDns()</pre> is the RoleAssignmentBeans method that used to return an array of user DN strings. To convert the array to a list so it can be used by the workflow, use the <pre>java.util.Arrays.asList(...)</pre>
Log Denial/Log Denial	Log	Used to write messages to the log to indicate the result of the request (approved or denied).
Finish	Finish	Logical end point of all workflows

Retrieving SoD Violations

This example shows the methods to use to either array-like methods or a list iterator to walk through the individual RoleAssignmentBean objects contained in the RoleAssignmentBeans object. These methods are common to all of the Beans classes.

Figure 9-4 Sample Workflow for Retrieving SoDs

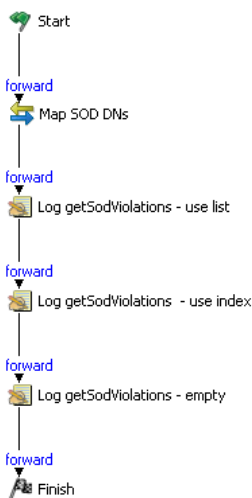


Table 9-8 Sample Workflow for Retrieving SoDs

Activity Name	Activity Type	Description
Start	Start	Logical starting point for all workflows.
Map SoD Dns	Mapping	
Log getSodViolations - Use List	Logging	<p>Illustrates how to use an iterator to walk thru the list of identityBean objects contained in the IdentityBeans returned by the RoleVault method getSodViolations().</p> <pre>function logviolations() { var dn = flowdata.get('doctor-nurse'); var identitybeans = RoleVault.getSodViolations(dn); var buffer = new Packages.java.lang.StringBuffer('Violations for role ' + dn + ': '); if (identitybeans.size() == 0) { buffer.append('no violations exist'); } else { iterator = identitybeans.iterator(); while (iterator.hasNext()) { var identitybean = iterator.next(); buffer.append([' '); buffer.append('dn=' + identitybean.getDn()); buffer.append(' type=' + identitybean.getType()); buffer.append(' '); } buffer.append(']'); return buffer; } }; logviolations()</pre> <p>The size() method is used to determine if any violations were returned.</p> <pre>identitybeans.size() == 0</pre> <p>To return an iterator to walk the list, use this method:</p> <pre>iterator=identityBeans.iterator()</pre>
Log getSodViolations - use index	Logging	<p>Illustrates how to use the index to access the array IdentityBean members returned from IdentityBeans using the Role Vault method getSodViolations(). This is similar to the list processing above, except that it uses the a For loop and a reference by index.</p> <pre>function logviolations(){ var dn = flowdata.get('doctor-nurse'); var identitybeans = RoleVault.getSodViolations(dn); var buffer = new Packages.java.lang.StringBuffer('Violations for sod ' + dn + ': '); if (identitybeans.size() == 0) { buffer.append('no violations exist'); } else { for (i = 0; i < identitybeans.size(); i++) { var identitybean = identitybeans.get(i); buffer.append([' '); buffer.append('dn=' + identitybean.getDn()); buffer.append(' type=' + identitybean.getType()); buffer.append(' '); } buffer.append(']'); return buffer; } }; logviolations()</pre> <p>To loop through all the members in the array:</p> <pre>for (i = 0; i < identityBeans.size(); i++))</pre> <p>To get the bean at position i in the array:</p> <pre>identityBean = identityBeans.get(i);</pre> <p>All beans support a getBean method that takes a dn string as the input paramter and returns the bean if there is one contained in the array for that dn.</p> <p>All Beans classes support a getBean() that takes a DN string as the input parameter. It returns the bean if the array contains one for that DN.</p>
Finish	Finish	Logical end point for all workflows.

9.4.2 Role Script API Reference

The Role Script API includes the methods available in the ECMA Expression Builder. These are the methods available for forms and workflows. The methods are grouped for convenience as follows:

- ♦ [“Container and Group Methods” on page 348](#)
- ♦ [“Role Methods” on page 348](#)
- ♦ [“SoD Methods” on page 349](#)
- ♦ [“User Methods” on page 350](#)
- ♦ [“Hidden Methods” on page 351](#)

Container and Group Methods

- ♦ [“getContainersToRoleAssignments” on page 348](#)
- ♦ [“getGroupsToRoleAssignments” on page 348](#)

getContainersToRoleAssignments

```
RoleVault.getContainersToRoleAssignments(roleDN)
```

Returns a [RoleAssignmentBeans](#) object that contains a list of [RoleAssignmentBean](#) objects. The [RoleAssignmentBean](#) objects include the container DN(s) assigned to the specified roleDN.

getGroupsToRoleAssignments

```
RoleVault.getGroupsToRoleAssignments(roleDN)
```

Returns a [RoleAssignmentBeans](#) object that contains a list of [RoleAssignmentBean](#) objects. The [RoleAssignmentBean](#) objects include the Group DNs assigned to the specified roleDN.

Role Methods

- ♦ [“getRoleAssignmentCause” on page 348](#)
- ♦ [“getRoleInfo” on page 349](#)
- ♦ [“getRolesToContainerAssignments” on page 349](#)
- ♦ [“getRolesToGroupAssignments” on page 349](#)
- ♦ [“getRolesToRoleAssignments” on page 349](#)
- ♦ [“getRolesToUserAssignments” on page 349](#)
- ♦ [“getRolesUserIn” on page 349](#)
- ♦ [“getRoleOwners” on page 349](#)
- ♦ [“getRoleApprovers” on page 349](#)

getRoleAssignmentCause

```
RoleVault.getRoleAssignmentCause(identityDn, roleDn)
```

Returns an [IdentityBeans](#) object that contains a list of [IdentityBean](#) objects. The [IdentityBeans](#) object shows the cause hierarchy for the role assignment for the specified `identityDn` and `roleDn`. For explicit assignments, it includes the DN of the user who made the request.

getRoleInfo

`RoleVault.getRoleInfo(roleDN, locale)`

A role lookup method that returns a [RoleBean](#).

getRolesToContainerAssignments

`RoleVault.getRolesToContainerAssignments(containerDN)`

Returns a [RoleAssignmentBeans](#) object that contains a list [RoleAssignmentBean](#). The [RoleAssignmentBean](#) objects contain the role DN's assigned to the specified `containerDN`.

getRolesToGroupAssignments

`RoleVault.getRolesToGroupAssignments(groupDN)`

Returns a [RoleAssignmentBeans](#) object that contains a list of [RoleAssignmentBean](#) objects. They include the role DN's for the specified `groupDN`.

getRolesToRoleAssignments

`RoleVault.getRolesToRoleAssignments(roleDN)`

Returns a [RoleAssignmentBeans](#) object that contains a list of [RoleAssignmentBean](#) objects. The [RoleAssignmentBean](#) objects include the child role DN's assigned to the specified `roleDN`.

getRolesToUserAssignments

`RoleVault.getRolesToUserAssignments(userDN)`

Returns a [RoleAssignmentBeans](#) object that contains a list of [RoleAssignmentBean](#) objects. These beans include the role DN(s) assigned to the specified `userDN`.

getRolesUserIn

`RoleVault.getRolesUserIn(userDN)`

Return a list of role DN's where the specified `userDN` is a member.

getRoleOwners

`RoleVault.getRoleOwners(roleDN)`

Returns the [IdentityBeans](#) object that contains a list of [IdentityBean](#) objects. The [IdentityBeans](#) object shows the owners of the specified role DN.

getRoleApprovers

`RoleVault.getRoleApprovers(roleDN)`

Returns the [IdentityBeans](#) object that contains a list of [IdentityBean](#) objects. The [IdentityBeans](#) object shows the approvers of the specified role DN.

SoD Methods

- ♦ [“getSodInfo” on page 350](#)
- ♦ [“getSodViolations” on page 350](#)

getSodInfo

`RoleVault.getSodInfo(sodDN, locale)`

Returns a [SodBean](#).

getSodViolations

`RoleVault.getSodViolations(sodDn)`

Returns an [IdentityBeans](#) object that contains a list of [IdentityBean](#) objects. They represent the users, groups, containers, and roles in violation of the specified sodDN.

User Methods

- ♦ [“getUsersInRole” on page 350](#)
- ♦ [“getUsersToRoleAssignments” on page 350](#)
- ♦ [“isUserAppAdmin” on page 350](#)
- ♦ [“isUserAttestationManager” on page 350](#)
- ♦ [“isUserComplianceAdmin” on page 350](#)
- ♦ [“isUserInRole” on page 351](#)
- ♦ [“isUserProvAdmin” on page 351](#)
- ♦ [“isUserRoleAdmin” on page 351](#)

getUsersInRole

`RoleVault.getUsersInRole(roleDN)`

Returns a list of user DNs who are members of the specified roleDn.

getUsersToRoleAssignments

`RoleVault.getUsersToRoleAssignments(roleDN, direct)`

Returns [RoleAssignmentBeans](#) object that contains a list of [RoleAssignmentBean](#) objects. The beans include the user DNs assigned to the specified roleDN. Specifying the direct argument means that only explicitly assigned to roles should be returned.

isUserAppAdmin

`RoleVault.isUserAppAdmin(userDN)`

Returns True if the current user is a Global Administrator.

isUserAttestationManager

`RoleVault.isUserAttestationManager(userDN)`

Returns True if the current user is an Attestation Officer.

isUserComplianceAdmin

`RoleVault.isUserComplianceAdmin(userDN)`

Returns True if the current user a Compliance Administrator.

isUserInRole

`RoleVault.isUserInRole(roleDN, userDN)`

Returns True if role is currently assigned to the specified user. The role can be assigned either explicitly or implicitly.

isUserProvAdmin

`RoleVault.isUserProvAdmin(userDN)`

Returns True if the current user is a Provisioning Administrator.

isUserRoleAdmin

`RoleVault.isUserRoleAdmin(userDN)`

Returns True if the current user is a Role Administrator.

Hidden Methods

The following methods are part of the Role Vault API, but helper methods are not provided in the Expression Builder in Designer. You must manually type the method. The Expression Builder supports the following methods:

- ♦ [“findRoles” on page 351](#)
- ♦ [“findSods” on page 352](#)
- ♦ [“findSodsByRoles” on page 353](#)
- ♦ [“findSodsByRoles” on page 353](#)
- ♦ [“findSodsByRoles” on page 353](#)
- ♦ [“getContainerSodViolations” on page 353](#)
- ♦ [“getGroupSodViolations” on page 353](#)
- ♦ [“getRoleSodViolations” on page 353](#)

findRoles

`RoleVault.findRoles(String attributeKey, String relationalOp, String filterValue, int roleLevel, String locale)`

Parameter	Description
attributeKey	
relationalOp	Valid values are: less, not-less, less-or-equal, not-less-or-equal, greater, not-greater, greater-or-equal, not-greater-or-equal, not-equals, equals, contains, not-contains, ends-with, not-ends-with, starts-with, not-starts-with
filterValue	
roleLevel	optional.
locale	optional.

Returns a RoleBeans object. You can use then access a list of roleBeans based on the attributeKey and its relation to the filterValue. Use the relationalOp such as STARTWITH or CONTAINS. When roleLevel is specified, additional scoping is performed based on the roleLevel.

findSods

```
RoleVault.findSods(String attributeKey, String relationalOp, String filterValue, String locale)
```

Returns a SodBeans object that contains a list of sodBeans based on the attributeKey relation to the filterValue based on the relationalOp.

Table 9-9 Enter Table Title Here

Parameter	Description
attributeKey	
relationalOp	Valid values are less not-less less-or-equal greater not-greater greater-or-equal not-equals equals contains not-contains ends-with not-ends-with starts-with not-starts-with
filterValue	
locale	Optional.

findSodsByRoles

```
findSodsByRoles(String roleDNs, String locale)
```

Returns a [SodBeans](#) object containing [SodBean](#) objects for the specified role DN. Locale is an optional parameter.

findSodsByRoles

```
findSodsByRoles(/*arraylist*/roledns, String locale)
```

Returns a [SodBeans](#) object containing a list of [SodBean](#) objects that include any of the specified roledns. Locale is optional.

findSodsByRoles

```
findSodsByRoles(String role1, String role2, String locale)
```

Returns a [SodBeans](#) object containing a list of [SodBean](#) objects that have a conflict between the two roles specified. Locale is optional.

getContainerSodViolations

```
getContainerSodViolations(String containerdn)
```

Returns a [SodBeans](#) object containing a list of [SodBean](#) objects where the specified container has roles assigned in violation of existing SoD constraints.

getGroupSodViolations

```
getGroupSodViolations(String groupdn )
```

Returns a [SodBeans](#) object that contains a list of sodBeans where the specified group has roles assigned in violation of existing SoD constraints.

getRoleSodViolations

```
getRoleSodViolations(String roledn )
```

Returns a SodBeans object that contains a list of [SodBean](#) objects where the specified roleDN has roles assigned in violation of existing SoD constraints.

Example:

```

function logViolations() {
  var dn = 'cn=Doctor,cn=Level20,cn=RoleDefs,cn=RoleConfig,cn=AppConfig,
          cn=MyDriver,cn=TestDrivers,o=novell';
  var sodBeanList = RoleVault.getRoleSodViolations(dn);
  var buffer = new Packages.java.lang.StringBuffer("Violations for role ' + dn + ': ");
  if ( sodBeanList.size() == 0 )
  { buffer.append("[no violations exist]");
  } else { iterator = sodBeanList.iterator();
        while ( iterator.hasNext() ) {
          sodBean = iterator.next();
          buffer.append("[");
          buffer.append("dn=' + sodBean.getSodDn());
          buffer.append(", role1=' + sodBean.getRole1Dn());
          buffer.append(", role2=' + sodBean.getRole2Dn());
          buffer.append(", name=' + sodBean.getName());
          buffer.append(", description=' + sodBean.getDescription());
          buffer.append("] ");
        }
      }
  buffer.append("]");
  return buffer;
};
logViolations()

```

9.4.3 Role Vault Bean API Reference

There are four Bean classes that represent the data returned by the Role Vault API. They are [IdentityBean](#), [RoleAssignmentBean](#), [RoleBean](#), and [SodBean](#). In many cases, multiple instances of these beans are returned. If a list is used to return multiple beans, you need to iterate through the list to retrieve the required data. Methods that are invoked from the form script that return multiple beans return a list of bean objects. To make it easier to manipulate data from a script, four other Beans classes are provided. They are [IdentityBeans](#), [RoleAssignmentBeans](#), [RoleBeans](#), and [SodBeans](#). These classes make it easier to retrieve data from individual bean classes without iterating through a list.

- ◆ [“IdentityBean” on page 354](#)
- ◆ [“IdentityBeans” on page 355](#)
- ◆ [“RoleAssignmentBean” on page 356](#)
- ◆ [“RoleAssignmentBeans” on page 356](#)
- ◆ [“RoleBean” on page 357](#)
- ◆ [“RoleBeans” on page 358](#)
- ◆ [“SodBean” on page 360](#)
- ◆ [“SodBeans” on page 361](#)

IdentityBean

The IdentityBean class includes methods for retrieving a DN and an identity type. It includes the following methods:

- ◆ [“getDn” on page 354](#)
- ◆ [“getType” on page 355](#)

getDn

```
public java.lang.String getDn()
```

Returns the DN of the identity.

getType

```
public java.lang.String getType()
```

Returns the type of the identity. Valid types are:

- ◆ C: Container
- ◆ G: Group
- ◆ R: Role
- ◆ U: User

IdentityBeans

The IdentityBeans class includes methods for manipulating one or more IdentityBeans objects or a list of IdentityBeans objects. It includes the following methods:

- ◆ [“getDns” on page 355](#)
- ◆ [“getTypes” on page 355](#)
- ◆ [“getIdentityBean” on page 355](#)
- ◆ [“size\(\)” on page 355](#)
- ◆ [“getBean\(\)” on page 355](#)

getDns

```
public String[] getDns()
```

Returns a String Array of DNs.

getTypes

```
public String[] getTypes()
```

Returns a String Array of identity types. Values are:

- ◆ U: Indicates User
- ◆ G: Indicates Group
- ◆ C: Indicates Container
- ◆ R: Indicates Role

getIdentityBean

```
public IdentityBean getIdentityBean(Stringdn);
```

Returns the Identity Bean with the specified DN.

size()

```
public int size()
```

Returns the number of Identity Beans.

getBean()

```
public IdentityBean getBean(int n)
```

n is the index of the required bean.

Returns the IdentityBean at the specified index.

RoleAssignmentBean

The RoleAssignmentBean class includes methods for manipulating a single RoleAssignmentBean. The methods include:

- ♦ [“getEffectiveTime” on page 356](#)
- ♦ [“getExpirationTime” on page 356](#)
- ♦ [“getTargetDn” on page 356](#)
- ♦ [“getType” on page 356](#)

getEffectiveTime

```
public long getEffectiveTime()
```

Returns the role’s effective time. (java.util.Date.getTime()).

getExpirationTime

```
public long getExpirationTime()
```

Returns the role’s expiration time.

getTargetDn

```
public java.lang.String getTargetDn()
```

Returns the DN. The type of DN is based on the context of the method returning the bean. It can be a DN for a user, group, container, or role.

getType

```
public java.lang.String getType()
```

Returns the role’s assignment type. Values can be:

- ♦ G: Assignment was made through membership in a group.
- ♦ C: The assignment was made through membership in a container.
- ♦ E: The assignment was explicit.
- ♦ R: The assignment was inherited through the role hierarchy.

RoleAssignmentBeans

The RoleAssignmentBeans class includes methods for manipulating one or more RoleAssignmentBeans objects as well as a list of RoleAssignmentBeans.

- ♦ [“getEffectiveTimes” on page 357](#)
- ♦ [“getExpirationTimes” on page 357](#)
- ♦ [“getTargetDns” on page 357](#)
- ♦ [“getTypes\(\)” on page 357](#)
- ♦ [“getRoleAssignmentBean” on page 357](#)

- ♦ [“size” on page 357](#)
- ♦ [“getBean” on page 357](#)

getEffectiveTimes

```
public Long[] getEffectiveTimes()
```

Returns the role’s effective time.

getExpirationTimes

```
public long[] getExpirationTimes()
```

Returns the role’s expiration times.

getTargetDns

```
public String[] getTargetDns()
```

Returns target DN’s. This could be a user, group, container, or role DN’s based on the context of the method that returns the bean.

getTypes()

```
public String[] getTypes()
```

Returns the assignment types. Values are:

- ♦ G: Assignment was derived from group membership.
- ♦ C: Assignment was derived from Container.
- ♦ E: Assignment was explicit.
- ♦ R: Assignment was through role hierarchy.

getRoleAssignmentBean

```
public RoleAssignmentBean getRoleAssignmentBean(String targetDN)
```

Returns the role assignment bean with the corresponding DN.

size

```
public int size()
```

Returns the number of role assignment beans.

getBean

```
public RoleAssignmentBean getBean(int n)
```

Returns the Role assignment bean at the specified index.

RoleBean

The RoleBean class includes methods for manipulating a single RoleBean. The methods include:

- ♦ [“getDescription” on page 358](#)
- ♦ [“getName” on page 358](#)

- ♦ [“getRoleDn” on page 358](#)
- ♦ [“getRoleLevel” on page 358](#)
- ♦ [“getRoleOwner” on page 358](#)
- ♦ [“getRoleApprover” on page 358](#)

getDescription

```
public java.lang.String getDescription()
```

Returns the localized role description.

getName

```
public java.lang.String getName()
```

Returns the localized role name.

getRoleDn

```
public java.lang.String getRoleDn(String roleDN)
```

Returns the role’s DN.

getRoleLevel

```
public long getRoleLevel()
```

Returns the role level.

getRoleOwner

```
public java.lang.String getRoleOwner(String roleDN)
```

Returns the role’s owner.

getRoleApprover

```
public java.lang.String getRoleApprover(String roleDN)
```

Returns the role’s approver.

RoleBeans

The RoleBeans class includes methods for manipulating one or more RoleBeans as well as a list of RoleBeans. Methods include:

- ♦ [“getDescription” on page 359](#)
- ♦ [“getNames” on page 359](#)
- ♦ [“getRoleDns” on page 359](#)
- ♦ [“getRoleLevels” on page 359](#)
- ♦ [“getRoleBean” on page 359](#)
- ♦ [“size” on page 359](#)
- ♦ [“getBean” on page 359](#)
- ♦ [“findRoles” on page 359](#)

getDescription

```
public String[] getDescriptions()
```

Returns the localized role description.

getNames

```
public String[] getNames()
```

Returns the localized role names.

getRoleDns

```
public String[] getRoleDns()
```

Returns the role DNs.

getRoleLevels

```
public long[] getRoleLevels()
```

Returns the role levels

getRoleBean

```
public RoleBean getRoleBean(String roleDN)
```

Returns the RoleBean with the specified role DN.

size

```
public int size()
```

Returns the number of RoleBeans in the list.

getBean

```
public RoleBean getBean(int n)
```

Returns the RoleBean at the specified index (n).

findRoles

Returns the roles based on filter values. It has four methods. These methods must be mentioned separately because different parameters are passed in each of these methods.

- ◆ findRoles

```
public RoleBeans findRoles(String attributeKey, String relationalOp, String value, String locale, int roleLevel)
```

Returns the roles based on filter values.

- ◆ findRoles

```
public RoleBeans findRoles(String attributeKey, String relationalOp, String value, int roleLevel)
```

Returns the roles based on filter values.

- ◆ findRoles

```
public RoleBeans findRoles(String attributeKey, String relationalOp, String value, String locale)
```

Returns the roles based on filter values.

- ◆ findRoles

```
public RoleBeans findRoles(String attributeKey, String relationalOp, String value)
```

Returns the roles based on filter values.

SodBean

The SodBean class includes methods for manipulating a single SodBean. The methods include:

- ◆ [“getDescription” on page 360](#)
- ◆ [“getName” on page 360](#)
- ◆ [“getRole1Dn” on page 360](#)
- ◆ [“getRole2Dn” on page 360](#)
- ◆ [“getSodDn” on page 360](#)

getDescription

```
public java.lang.String getDescription()
```

Returns the SoD’s localized description.

getName

```
public java.lang.String getName()
```

Returns the SoD’s localized name.

getRole1Dn

```
public java.lang.String getRole1Dn()
```

Returns a role included in the SoD conflict. No special considerations are made between Role1Dn and Role2Dn.

getRole2Dn

```
public java.lang.String getRole2Dn()
```

Returns a role included in the SoD conflict. No special consideration is made between Role1Dn and Role2Dn.

getSodDn

```
public java.lang.String getSodDn()
```

Returns the SoD DN.

SodBeans

The SodBeans class includes methods for manipulating one or more SoDBeans objects along with a list of SodBeans. Methods include:

- ♦ “getDescriptions” on page 361
- ♦ “getNames” on page 361
- ♦ “getRole1Dns” on page 361
- ♦ “getRole2Dns” on page 361
- ♦ “getSodDns” on page 361
- ♦ “getSodBean” on page 361
- ♦ “size” on page 362
- ♦ “getBean” on page 362
- ♦ “findSodsByRoles” on page 362
- ♦ “findSods” on page 362
- ♦ “getGroupSodViolations” on page 363
- ♦ “getRoleSodViolations” on page 363
- ♦ “getContainerSodViolations” on page 363

getDescriptions

```
public String [] getDescriptions ()
```

Returns the localized description of the SoD.

getNames

```
public String [] getNames ()
```

Returns the localized names of the SoD.

getRole1Dns

```
public String[] getRole1Dns ()
```

Returns the first role in the SoD conflict. No special consideration is made for Role1Dn and Role2Dn.

getRole2Dns

```
public String[] getRole2Dns ()
```

Returns the second role in the SoD conflict.

getSodDns

```
public String[] getSodDns ()
```

Returns SoD DNs.

getSodBean

```
public SodBean getSodBean (String sodDn)
```

Returns the SodBean with the specified SodDn.

size

```
public int size()
```

Returns the number of SodBeans.

getBean

```
public SodBean getBean(int n)
```

Returns the SodBean at the specified index (n)

findSodsByRoles

findSodsByRoles has six methods. These methods must be mentioned separately because different parameters are passed in each of these methods.

- ◆ findSodsByRoles

```
public SodBeans findSodsByRoles(List<String> roleDns, String locale)
```

Returns the SoDs based on a list of role DNs.

- ◆ findSodsByRoles

```
public SodBeans findSodsByRoles(List<String> roleDns)
```

Returns the SoDs based on a list of role DNs by using the default application locale.

- ◆ findSodsByRoles

```
public SodBeans findSodsByRoles(String targetRoleDn, String sourceRoleDn, String locale)
```

Returns the SoDs based on source and target DNs.

- ◆ findSodsByRoles

```
public SodBeans findSodsByRoles(String targetRoleDn, String sourceRoleDn)
```

Returns the SoDs based on source and target DNs.

- ◆ findSodsByRoles

```
public SodBeans findSodsByRoles(String[] roleDns)
```

Returns the SoDs based on an array of role DNs.

- ◆ findSodsByRoles

```
public SodBeans findSodsByRoles(String[] roleDns, String locale)
```

Returns the SoDs based on an array of role DNs.

findSods

findSods has two methods. These methods must be mentioned separately because different parameters are passed in each of these methods.

- ◆ findSods

```
public SodBeans findSods(String attributeKey, String relationalOp, String value, String locale)
```

Returns the SoDs based on the DAL attribute filter.

- ◆ findSods

```
public SodBeans findSods(String attributeKey, String relationalOp, String value)
```

Returns the SoDs based on the DAL attribute filter.

getGroupSodViolations

```
SodBeans getGroupSodViolations(String groupDn)
```

Returns the SoD violations for a specified group.

getRoleSodViolations

```
SodBeans getRoleSodViolations(String roleDn)
```

Returns the SoD violations for a specified role.

getContainerSodViolations

```
SodBeans getContainerSodViolations(String containerDn)
```

Returns the SoD violations for a specified container.

10 Configuring Provisioning Teams

The *Requests & Approvals* tab in the Identity Manager User Application includes a group of actions called *My Team's Work*. The *My Team's Work* actions allow you to work with team member tasks and requests in a workflow. This section describes how to create a team and define its characteristics (such as members, manager, and request rights).

- ♦ [Section 10.1, "About Teams," on page 365](#)
- ♦ [Section 10.2, "Managing Teams," on page 367](#)

10.1 About Teams

A *team* identifies a group of users and determines who can manage provisioning requests and approval tasks associated with this team. The team definition consists of a list of team managers, team members, and team options, as described below:

- ♦ The *team managers* are those users who can administer requests and tasks for the team. Team managers can also be given permission to set proxies and delegates for team members. Team managers can be users or groups.
- ♦ The *team members* are those users who are allowed to participate on the team. Team members can be users, groups, or containers within the directory. Alternatively, they can be derived through directory relationships. For example, the list of members could be derived by the manager-employee relationship within the organization. In this case, the team members would be all users that report to the team manager.

NOTE: The Provisioning Application Administrator can configure the directory abstraction layer to support cascading relationships so that multiple levels within an organization can be included within a team. The number of levels to include is configurable by the administrator.

- ♦ The *team options* determine the provisioning request scope, which specifies whether the team managers can act on an individual provisioning request, one or more categories of requests, or all requests. The team options also determine whether team managers can set proxies for team members or set the availability of team members for the purpose of delegation.

NOTE: The User Application supports only a single level for proxy assignments. Proxy assignments are not propagated to multiple levels.

The Provisioning Application Administrator can perform all team management functions.

The teams you define are stored locally in the Designer project's `Provisioning\AppConfig\TeamDefs` directory. The filenames are derived from the object key with the `.team` or `.rbpmTeam` (for RBPM 3.7 or higher) extension.

Although a team can sometimes refer to a group in the Identity Vault, a team is not the same thing as a group. When you define a group in the Identity Vault, you identify a set of users that have something in common. However, the group does not automatically have the capabilities of a team within the User Application. To take advantage of the team capabilities within the User Application, you must define a team that points to the group.

- ♦ [Section 10.1.1, “About Team Requests,” on page 366](#)
- ♦ [Section 10.1.2, “Using a Team to Manage Direct Reports,” on page 367](#)

10.1.1 About Team Requests

A *team request object* specifies the requests that a team can work on. The request rights specify the actions that team managers can perform on the provisioning requests and tasks.

The team definition has a *one-to-many relationship* with team request objects. This means that each team must have at least one team request object defined for it, but it can have more. Each team request object is associated with only one team definition. When you configure the team request object, you configure the task scope and permissions for the team manager.

The task scope options define the manager’s ability to act on tasks:

- ♦ Where a team member is an addressee
- ♦ Where a team member is a recipient

WARNING: For security reasons, the recipient task scope option is disabled by default. Giving a team manager the ability to act on tasks where the recipient of the request is a team member can raise several security issues. First, the manager is then able to view data included on any of the forms that are displayed during the course of workflow execution, regardless of his or her trustee rights. Second, depending on the permission options (see below), a team manager could circumvent the approval process by claiming or approving the task, or by reassigning it to someone else.

The permissions options define the team manager’s ability to:

- ♦ Initiate a provisioning request on behalf of a team member.
- ♦ Retract a provisioning request on behalf of a team member.
- ♦ Make a team member a delegate for other team members’ provisioning requests.
- ♦ Claim a task for a team member who is a recipient or addressee (based on the task scope).
- ♦ Reassign a task for a team member who is a recipient or addressee (based on the task scope).

If both of the task scope options are disabled, the team manager cannot view or act on any active requests. Therefore, you must enable at least one of the Permissions options for the team manager.

NOTE: The User Application supports only a single level for delegate assignments. Delegate assignments are not propagated to multiple levels.

The trustee rights defined for a provisioning request apply to team managers who want to initiate a request on behalf of their team members. If the team manager does not have the trustee rights to a provisioning request definition, the team manager cannot make the request because the User Application does not display the provisioning request.

10.1.2 Using a Team to Manage Direct Reports

You can define a team that allows managers throughout an organization to control the provisioning environment for their direct reports. If defined properly, a single team definition can be used to allow *all* managers to control the activities of their direct reports. This means that you do not need to define a separate team for each reporting relationship.

A team that supports direct reports within an organization has the following basic requirements:

- ♦ The members of the team are defined by the Manager-Employee relationship.
- ♦ The managers of the team are defined by a dynamic group that searches subcontainers, using a search filter that retrieves only the managers.

After the team has been defined, the User Application allows all managers to use the team management actions within the navigation menu. This gives the managers the ability to control the provisioning activities that their direct reports can perform.

For details on how to define a team to manage direct reports, see [Section 10.2.3, “Creating a Team to Manage Direct Reports,”](#) on page 371.

10.2 Managing Teams

This section includes information about the following topics:

- ♦ [Section 10.2.1, “Creating a Team,”](#) on page 367
- ♦ [Section 10.2.2, “Deleting a Provisioning Team,”](#) on page 370
- ♦ [Section 10.2.3, “Creating a Team to Manage Direct Reports,”](#) on page 371

10.2.1 Creating a Team

To create a new provisioning team:

- 1 Launch the New Team Wizard in any of these ways:

From Designer’s menus:

- ♦ Select *File > New > Provisioning Team*, then click *Next*.

From the Provisioning view:

Right-click *Provisioning Teams*, then select *New*.

The New Provisioning Teams dialog box displays. When the dialog box is launched from the File menu, it contains fields that are not displayed when it is launched from the Provisioning view.



2 Fill in the fields as follows:

Field	Description
<i>Identity Manager Project and Provisioning Application</i>	Select the correct Identity Manager project and Provisioning Application. NOTE: This field displays when you create queries from the <i>File</i> menu.
<i>Identifier</i>	Type a common name (CN) for the team.
<i>Display Label</i>	Type the name of the provisioning team. This is the name displayed in Designer and also in the User Application runtime. The label is localizable in the Team editor.
<i>Description</i>	Provide a description of the provisioning team.
<i>Domain</i>	Provide the domain for the team. It could be Roles, Resources, or Provisioning.

3 Click *Finish*. The Team panel of the Provisioning Team editor displays.

Provisioning Team

Identifier (CN): **testRoleTeam55cb85afb2b94b1081dd69664c7c41fd**

Display Name: testRoleTeam

Description: test Role

Domain: **Role**

Managers

+ ×

Managers

Managers are members of team

Members

DAL Relationship


All Users

Identity Vault Objects

+ ×

Members

Team | **Permissions**

- 4 Type a description.
- 5 To define the team’s members, do one of the following:
 - ◆ Click *DAL Relationship*, then select the relationship that represents the team’s membership.
 - ◆ Click *All Users* to select all users as members of this team.
 - ◆ Click *Identity Vault Objects*. Click , then select the members from the Identity Vault. Members can be users, groups, containers, organizational units (OU), or organizations (O). Specifying an O or OU can impact the User Application’s runtime performance. The manager needs to search for the member using a select-pick list to reduce the performance impact.
- 6 Click *Permissions*. The Team Permissions Configuration page displays.

Team Permissions Configuration

The data below is read-only. To configure the data, please use the User Application web client.



Object Type	Authorized Objects	Permission
Role	Compliance Administrator	Assign Role To User
Role	Compliance Administrator	Assign Role to Group And ...
Role	Compliance Administrator	Revoke Role From User
Role	Compliance Administrator	Revoke Role From Group ...
Role	Compliance Administrator	View Role
Role	Report Administrator	Revoke Role From User
Role	adb	Create Role
Role	adb	Assign Role To User
Role	adb	Assign Role to Group And ...
Role	adb	Revoke Role From User
Role	adb	Revoke Role From Group ...
Role	adb	View Role

Selection

Description

Object Type

Specifies the type of authorized object.

Authorized Objects

Specifies the name of the authorized object.

Permission

Specifies the permissions that the team has on that object.

7 Click *Save*.

The Team Permissions Configuration page is read-only. The object information is populated from the User Application.

You must save the Provisioning Team for it to be available to the User Application. See [Section 2.7, “Deploying Provisioning Objects,” on page 27](#). A provisioning team creates one object (srvprvRbpmTeam) in the User Application driver Appconfig Teams node. The srvprvRbpmTeam contains the provisioning teams object.

IMPORTANT: The team and the team request objects represented a team in the User Application versions prior to 3.7. The team request object contained the request that could be accessed by the team. User Application 3.7 and 4.0 teams store the permissions on individual requests or request containers eliminating the need for two objects. For more information on team authorization, refer to [“Team Configuration”](#) in the *User Application: Administration Guide*.

10.2.2 Deleting a Provisioning Team

You delete the Provisioning Team object from the Provisioning view by right-clicking the team, then selecting *Delete*. The Delete confirmation dialog box lets you specify whether to delete the object locally only, or from the Identity Vault during the next deploy of the parent object.

10.2.3 Creating a Team to Manage Direct Reports

For information on creating the team, refer to “[Team Configuration](#)” in the *User Application: Administration Guide*.

For more information on saving and deploying the team, see [Section 2.7, “Deploying Provisioning Objects,”](#) on page 27.

11 Configuring Roles

This section describes how to use the Roles Based Provisioning Module tools to configure the contents of the *Roles* tab of the User Application.

- ◆ [Section 11.1, “About the Roles Based Provisioning Module,” on page 373](#)
- ◆ [Section 11.2, “About the Role Catalog,” on page 373](#)
- ◆ [Section 11.3, “About the Role Editor,” on page 374](#)
- ◆ [Section 11.4, “About the Separation of Duties Editor,” on page 388](#)
- ◆ [Section 11.5, “About the Role Configuration Editor,” on page 392](#)
- ◆ [Section 11.6, “Importing Roles Defined in CSV Files,” on page 395](#)

11.1 About the Roles Based Provisioning Module

The Identity Manager User Application’s Roles Based Provisioning Module provides an easy way to assign people to privileges in target systems through their role membership. The module allows you to easily ensure that employees have access to the resources they need.

A role defines a set of privileges related to one or more target systems or applications. When you assign a user to a role, the user is granted all the entitlements associated with the role (with any parameter values as specified in the Role editor). When a user is removed from a role, all entitlements granted when the user was assigned to the role are revoked. Only the entitlements granted through the role are revoked; entitlements the user has been granted through other means are not revoked.

11.2 About the Role Catalog

The Role Catalog uses the Identity Vault to store role definitions that the User Application uses to determine:

- ◆ The set of roles that it can display or modify.
- ◆ The separation of duties (SoD) constraints between roles.
- ◆ The provisioning request definition to execute for role membership requests.
- ◆ The provisioning request definition to execute for SoD constraint exceptions.

The User Application ships with:

- ◆ Two roles based provisioning request definitions.
- ◆ A Roles Category list.
- ◆ Default role levels.
- ◆ Default mid-level system roles.

You use the Roles Based Provisioning tools to create new Role Catalog objects and customize existing ones for your own business needs. The Role Catalog node of the Provisioning view provides access to the Identity Manager Roles Based Provisioning Module design and configuration tools.

You can use the Role Catalog node to import, export, deploy, validate, compare, and localize the roles definitions, separation of duties constraints, and the Roles Configuration object as a group or individually. It also provides access to each of the Roles Based Provisioning Module tools.

When you use any of the editors available through the Role Catalog, you modify a set of local XML files. The local files are created when you add a Role Service driver to the Identity Manager project. The files are created in the workspace in the project's `Provisioning\AppConfig\RoleConfig` folder.

Table 11-1 Local Roles Directories

Directory Name	Description
RoleDefs	Contains a folder for each role level. These folders can contain additional hierarchy levels, depending on how you set up your roles. If you add categories or additional levels, they are reflected in the folder structure. The folders contain the definitions for the roles within that level, and the file extensions correspond to the level. For example, the files in the level10 folder have <code>.level10</code> as the extension.
SoDDefs	Contains the files that define the separation of duties constraints. Files have the <code>.sod</code> extension.

The Roles Configuration object definition file resides at the root of the `RoleConfig` folder. There can be only one such file, and its name is `configuration.roleconfig`.

The Role Catalog is deployed in the User Application driver's `AppConfig.RoleConfig` file.

11.3 About the Role Editor

The Role editor allows you to create and configure the roles you want to assign and manipulate in the *Roles* tab of the User Application. You use the editor to define the role details.

- ◆ [Section 11.3.1, “Understanding Role Hierarchy,” on page 374](#)
- ◆ [Section 11.3.2, “Using the Role Editor,” on page 375](#)
- ◆ [Section 11.3.3, “Role Properties Reference,” on page 386](#)

11.3.1 Understanding Role Hierarchy

The Roles Based Provisioning module uses a role hierarchy to simplify the model for assigning users to roles (and thus permissions to users). The role hierarchy allows you to assign roles in a more efficient way. For example, rather than assigning a user to twenty roles, you can do it by assigning role levels.

- ◆ [“About Role Levels” on page 375](#)
- ◆ [“About Role Containers” on page 375](#)

About Role Levels

Role levels define role hierarchy. Roles defined at the highest level (called Business Roles) define operations that have business meaning within the organization. Mid-level roles (called IT Roles) supports technology functions. Roles defined at the lowest level of the hierarchy (called Permission Roles) define lower-level privileges.

A higher-level role automatically includes privileges from the lower-level roles that it contains. For example, a Business Role automatically includes privileges from the IT Roles that it contains. Similarly, an IT Role automatically includes privileges from the Permission Roles that it contains.

Role relationships are not permitted between peer roles within the hierarchy. In addition, lower-level roles cannot contain higher-level roles.

You can modify the label used for each role level in the User Application by defining localized strings for the level's Name and Description in the role configuration editor.

About Role Containers

A role container is an organizational unit within the User Application driver. The User Application allows you to assign a role to a container. When you to assign a role to a container, the users in the container are assigned to the role. This type of role assignment is called an indirect assignment. Roles explicitly assigned to a user from within the User Application are called direct assignments.

Role containers reside under role levels. The User Application shows only the role containers that reside under the role level that you choose. You can create a role either directly in a role level, or in a container within the role level. Specifying the role container is optional.

NOTE: Designer does not allow you to create roles with the same name under different containers, although the role container that you specify while creating roles might be different for different roles.

You can use the Role editor to create role containers (see [“Creating a Role Container” on page 384](#)).

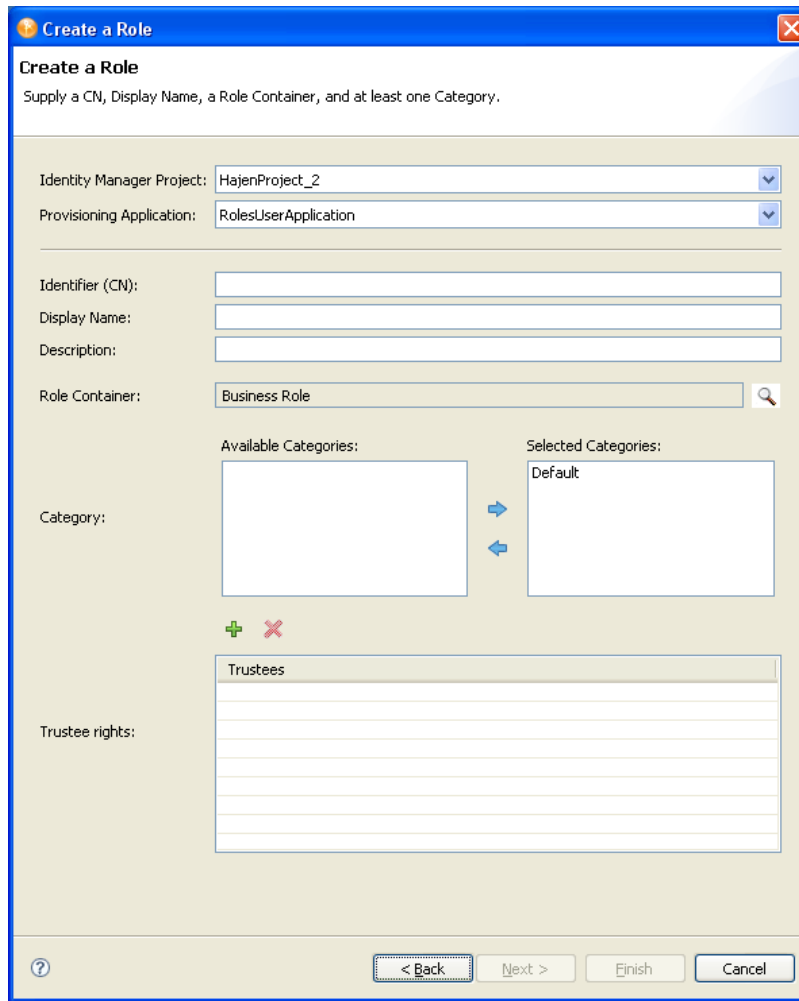
11.3.2 Using the Role Editor

- ◆ [“Creating New Roles” on page 375](#)
- ◆ [“Specifying a Role Hierarchy” on page 380](#)
- ◆ [“Specifying Entitlements” on page 381](#)
- ◆ [“Specifying Resource Associations” on page 383](#)
- ◆ [“Creating a Role Container” on page 384](#)
- ◆ [“Specifying Role Approvals” on page 385](#)

Creating New Roles


- 1 Open the Create a Role Wizard in one of these ways:
 - ◆ From the *Provisioning view*, open *Role Catalog*, right-click *Roles*, then select *New*.
 - ◆ Right-click a role container, then select *New*.
 - ◆ Select *File > New > Provisioning > Role*.

The Create a Role Wizard displays:




2 Fill in the fields as follows (* indicates a required field):

Field	Description
<i>Identity Manager Project and Provisioning Application*</i>	The name of the Identity Manager project and the provisioning application where you want to create the role. NOTE: These two fields display when you launch the wizard from the <i>File</i> menu.
<i>Identifier (CN)*</i>	The unique identifier for the role.
<i>Display Name*</i>	The text displayed as the <i>Role Name</i> field in the User Application. You can translate this text into any of the languages supported by the User Application. For more information, see Section 2.10, "Localizing Provisioning Objects," on page 35.
<i>Description</i>	The text displayed as the <i>Role Description</i> field in the User Application. You can translate this text into any of the languages supported by the User Applications. For more information, see Section 2.10, "Localizing Provisioning Objects," on page 35.

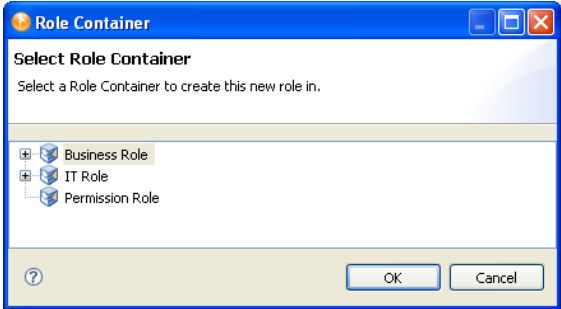Field	Description
<i>Role Container</i>	<p>The root location of the roles objects within the User Application driver. It defaults to Business Role.</p> <p>To specify a Role Container:</p> <ol style="list-style-type: none"> 1. Click <i>Search</i> to open the container selection dialog box.
	
	<ol style="list-style-type: none"> 2. Select a container or subcontainer from the list. 3. Click <i>OK</i>.
<i>Category*</i>	Allows you to categorize roles. Categories are used for filtering role lists in the User Application. The category names are defined in the directory abstraction layer Role Category list.
<i>Trustee Rights</i>	Specifies the users, groups, or containers that can read, compare, and browse the roles. (Read, compare, and browse are the default privileges.)

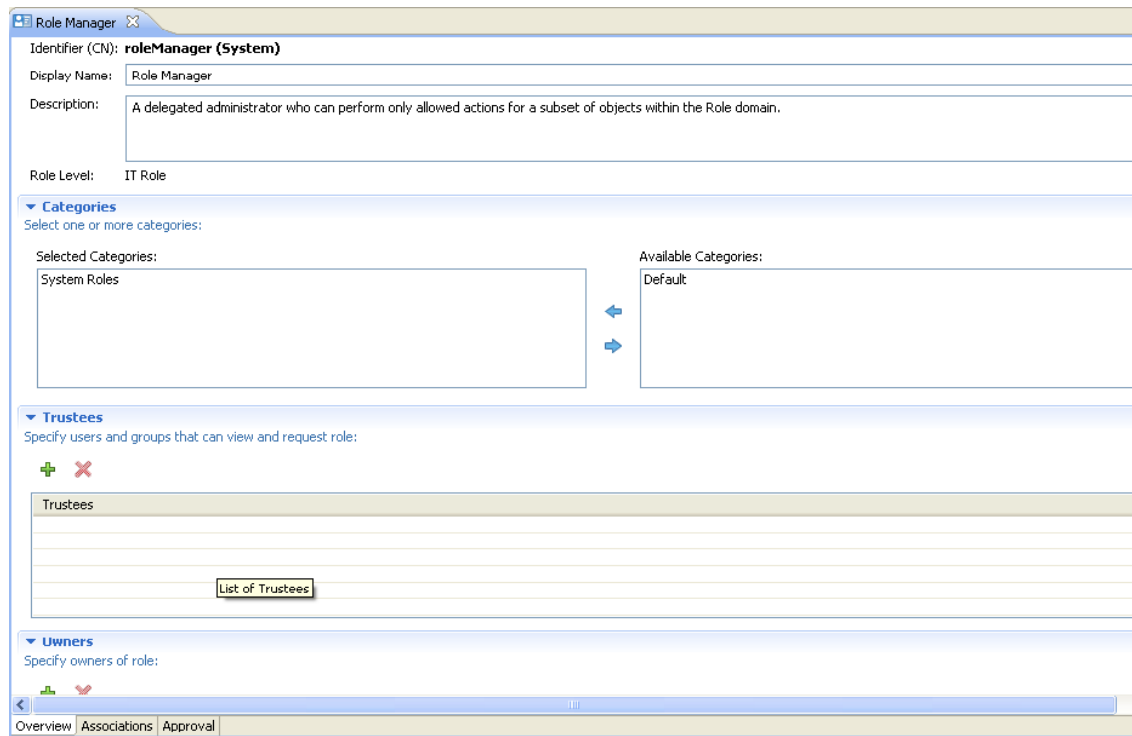3 Click *Finish*. Designer creates the role locally and opens the Role editor.



- 4 Fill in the remaining fields in the *Overview* tab as described in [Table 11-4, “Role Overview Properties,”](#) on page 386.
- 5 Click *Approval*.

For more information on completing the Contained Roles section, see [“Specifying a Role Hierarchy”](#) on page 380. For more information on how to use the Entitlements section, see [“Specifying Entitlements”](#) on page 381.

The screenshot shows the 'Role Manager' application window. The 'Approval Details' section is active, showing options for 'None', 'Standard', and 'Custom'. The 'Standard' option is selected, and the 'Approval Type' is set to 'Serial'. The 'Quorum (Percentage)' is set to 100. Below these settings is an 'Approvers' section with a table for listing approvers. The table has a header row labeled 'Approvers' and several empty rows below it. At the bottom of the window, there are tabs for 'Overview', 'Associations', and 'Approval', with 'Approval' being the active tab.

6 In the *Approval* section, choose *Approval Details*.

The screenshot shows a web-based configuration interface for a role named 'SampleRole'. The 'Approval Details' section is expanded, showing three radio button options: 'None', 'Standard' (which is selected), and 'Custom'. Below this, the 'Standard' section is further expanded to show 'Specify role approval details:'. This includes an 'Approval Type' section with 'Serial' selected over 'Quorum', and a 'Quorum (Percentage)' spinner set to '100'. Underneath, there are four icons: a green plus sign, a red minus sign, an upward arrow, and a downward arrow. A list box titled 'Approvers' contains one entry: 'ablake.users.idmsample-jboss5.novell'. At the bottom of the window, there are three tabs: 'Overview', 'Associations', and 'Approval' (which is the active tab).

You are prompted for different values, depending your selection. See [Table 11-3, “Role Approval Properties,”](#) on page 385 for information about each type.

7 Save the role.

For information on deploying a role, see [Section 2.7, “Deploying Provisioning Objects,”](#) on page 27.


Specifying a Role Hierarchy

You specify a role hierarchy by defining the roles that contain other roles (called Role Relationships in the User Application).

To define a role hierarchy for a new or existing role:

- 1 Navigate to the *Associations* tab of the Role editor.
- 2 In the *Contained Roles* section, click + to add a lower-level role to the current role.

The current role must be a mid-level (IT Role) or top-level role (Business Role), because the lowest level role (Permission Role) cannot contain other roles. The Role Search dialog box displays:




- 3 To use the Role Search dialog box:

- 3a** Specify the *CN*, *Display Name*, *Description*, *Category*, and *Role Level* on which you want to search.

For *CN*, *Display Name*, and *Description*, you can enter a wildcard (such as *S**, **S*), or regular expressions (such as *[A-Z][a-z]**).

You can enter a value for all of the fields or none of the fields. If you do not supply a value in a particular field, the search returns all of the possible values for that field. If you enter values in one or more of the fields, the values are ANDed together to create the search filter. The search occurs on the roles defined locally, not the roles deployed to the driver.

Role Level values are All Lower Levels, Level 10, and Level 20 depending on the level of the currently selected role.

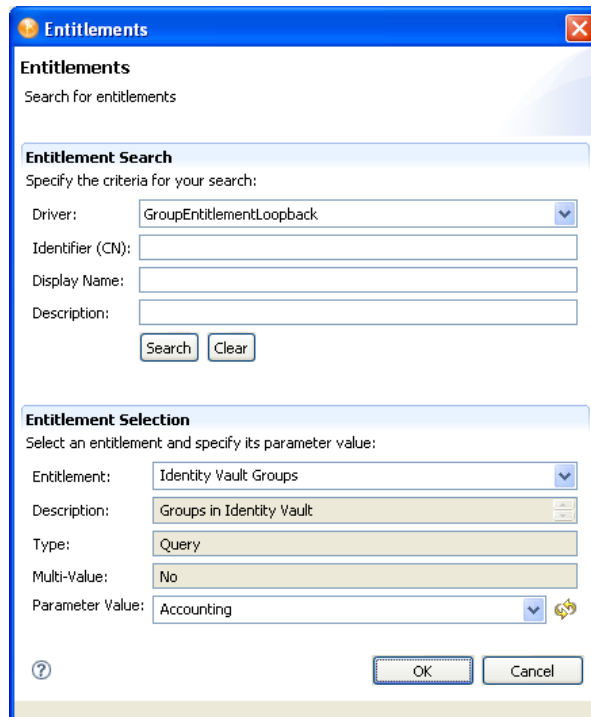
- 3b** Click *Search*. Roles matching the search criteria are displayed in the *Matching Roles* section within the *Available* roles list.
- 3c** Double-click the role or select the role and click .
- 3d** Click *OK* when you are done adding roles.

Designer closes the search dialog box and displays the roles you selected in the *Contained Roles* section.

NOTE: The ability to add entitlements to a role will be deprecated in future. You should add entitlements to a resource by using the User Application Web client.

Specifying Entitlements

- 1 In the *Entitlements* section, click + to add an entitlement for this role. The Entitlement Search dialog box displays:



The screenshot shows the 'Entitlements' dialog box. It is divided into two main sections: 'Entitlement Search' and 'Entitlement Selection'.
The 'Entitlement Search' section is titled 'Search for entitlements' and 'Specify the criteria for your search:'. It contains four input fields: 'Driver' (a dropdown menu with 'GroupEntitlementLoopback' selected), 'Identifier (CN)', 'Display Name', and 'Description'. Below these fields are 'Search' and 'Clear' buttons.
The 'Entitlement Selection' section is titled 'Select an entitlement and specify its parameter value:'. It contains five input fields: 'Entitlement' (a dropdown menu with 'Identity Vault Groups' selected), 'Description' (a text box with 'Groups in Identity Vault'), 'Type' (a text box with 'Query'), 'Multi-Value' (a text box with 'No'), and 'Parameter Value' (a dropdown menu with 'Accounting' selected). Below these fields are 'OK' and 'Cancel' buttons, along with a help icon (?) on the left.

- 2 To complete the Entitlement search:

- 2a Choose the driver that contains the entitlement you want.

- 2b Specify the *CN*, *Display Name*, and *Description* on which you want to search.

You can enter a wildcard (such as *S**, **S*) or a regular expression (such as *[A-Z][a-z]**), then click *Search*.

You can enter a value for all of the fields or none of the fields. If you do not supply a value in a particular field, the search returns all of the possible values for that field. If you enter values in one or more of the fields, the values are ANDed together to create the search filter. The search occurs locally. Entitlements contained by the selected driver that match the search criteria are displayed in the Entitlements Selection section.



The search is complete when the *Entitlement* field displays *<Select an Entitlement>*.

- 3 To complete the Entitlement selection:

- 3a Choose the entitlement from the Entitlement drop-down list.

The *Description*, *Type*, and *Multi-Value* fields are read-only. These values are obtained from the Entitlement definition.

- 3b Choose the parameter value.

Type	Parameter Value Options
None	No parameter value needed.
User-defined	Specify your own value.
Admin-defined	Select from the available parameter values provided in the drop-down list. These values are retrieved from the local Entitlement definition.
Query	<p>Select from the available parameter values provided in the drop-down list. Designer connects to your Identity Vault to retrieve a cached list of available parameter values. These values were obtained by a prior run of the query defined in the Entitlement section.</p> <p>If Designer is unsuccessful in retrieving these values, it displays a dialog box reporting the problem. You can either resolve these issues before attempting to create this entitlement reference again or simply enter your own value in the <i>Parameter Value</i> field. There are two buttons to help you retrieve your query parameter values:</p> <p>: <i>Refresh cached query result.</i> Click this button if you want Designer to attempt to connect to the Identity Vault and retrieve the query parameter values. This is most useful if Designer was not able to connect to the Identity Vault on the first attempt.</p> <p>: <i>Run query in Identity Vault.</i> Click this button if you want Designer to run the query in the Identity Vault and return the refreshed results.</p>

- 3c** Click *OK* to save the definition. Designer displays the definition in the Entitlements table. Query parameter values are translated to the query's full CN when displayed in the table.

The entitlements defined for the role are triggered when the role is granted. However, if the entitlement is invalid, the role assignment still succeeds, but a message about the entitlement failure is written to the role service Audit log.

Specifying Resource Associations

The Resource Associations table is read-only. It is populated through the User Application Web client.

The screenshot shows a web client interface for configuring a role named 'SampleRole'. It is divided into three main sections:

- Contained Roles:** A section for specifying roles contained by the role. It includes a table with columns 'Role' and 'Level'. The table contains two entries: 'Purchasing' with level 'Permission Role' and 'Order Supplies' with level 'Permission Role'. There are '+' and '-' icons for adding and removing roles.
- Entitlements:** A section for adding or removing entitlements. It includes a table with columns 'Entitlement', 'Driver', 'Type', 'Multi-Value', and 'Parameter Value'. There are '+' and '-' icons for adding and removing entitlements. A yellow warning message states: 'The ability to add entitlements to a role will be deprecated. It is recommended that entitlements be added to a resource using the User Application web client.'
- Resources:** A section for resources associated with the role. It includes a table with columns 'Resource', 'Association Description', and 'Association Values'. The table contains five entries: 'Air Travel Resource' (Permit travel privileges), 'Building Pass Resource' (Allow access to company office buildings), 'Group Membership Resource' (Give membership to specified groups, with values '\METACARPALSTREE\novell\ldmsample-jboss5\groups\HR'), 'Health Benefits Resource' (Provide employee health benefits), and 'Parking Permission Resource' (Allow access to specified parking lots, with values 'Cambridge:Main Street'). A yellow warning message states: 'The data below is read-only. To configure the data, please use the User Application web client.'

At the bottom of the window, there are tabs for 'Overview', 'Associations', and 'Approval', with 'Associations' currently selected.

Table 11-2 Specifying Resource Associations

Field	Description
<i>Resource Name</i>	Name of the resource associated with the role.
<i>Association Description</i>	Description of the reason for associating the resource with the role.
<i>Association Values</i>	Values applied to the resource when the role is assigned.

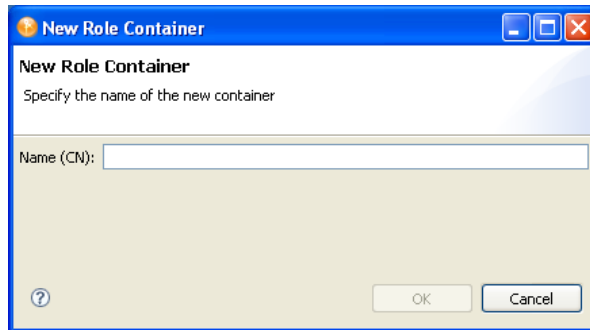
The information present in the Role editor is updated for all the roles when the Role Catalog is imported from eDirectory. You can only detect new resource associations but not the resource associations that have been removed in the User Application.

Ensure that the deleted resource associations are removed from the Resources list.

- 1 Before performing a Live Import from the Role Catalog, go to the Navigator View and navigate to the `\MyProject\Model\Provisioning\AppConfig\RoleConfig\ResourceAssociations` folder.
- 2 Remove all the files in the folder except the `ResourceAssociations.digest` file.
- 3 From the Provisioning View, select the *Role Catalog* object and run the *Live Import* to import all the resource associations again and to provide you the updated correct information.

Creating a Role Container

- 1 From the Provisioning view, open the Role Catalog, navigate to a Role-level container, right-click it, then select *New Role Sub-Container*. The New Role Container dialog box displays:





- 2 Type the name of the container, then click *OK*.

The container name the object's CN. It is not a display label so it is not localizable. Because the name is a CN and is not localizable, it displays as `<name-string> (CN)`.

Designer creates the subcontainer locally. On deploy, the container is created in the role-level container of the `RoleDefs.RoleConfig.AppConfig` node of the User Application driver specified by this project.

Specifying Role Approvals

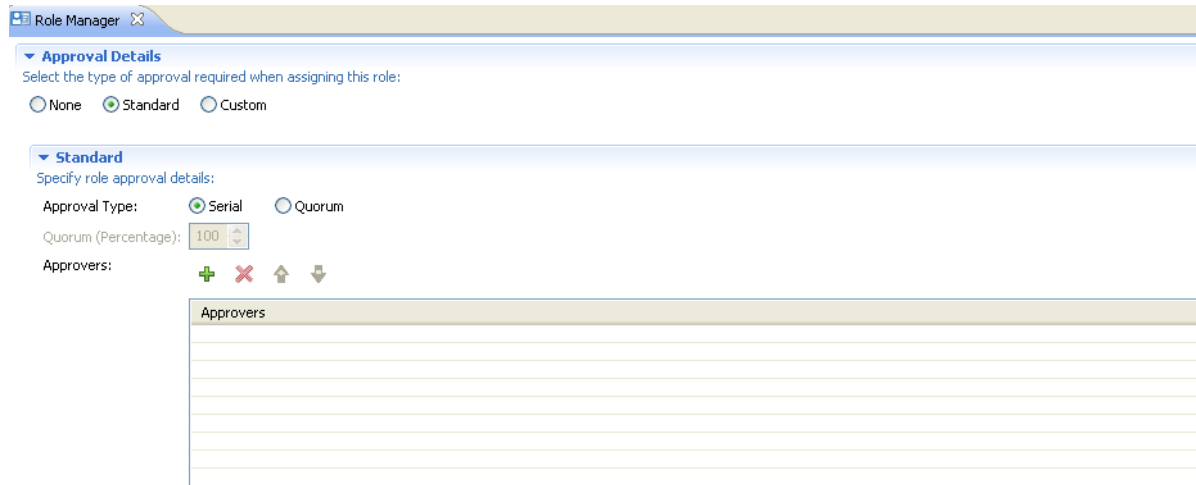Navigate to the *Approval* tab from the Role editor.



Select the type of approval required when assigning a role.

Table 11-3 Role Approval Properties

Field	Description
<i>No Approval</i>	Select this option if the role does not require approval when requested.
<i>Standard Approval</i>	<p>Select this option if the role requires approval when requested, and you want the approval to execute the standard provisioning request definition that ships with the Roles Based Provisioning module. You must select the type of approval (serial or quorum) and the valid approvers.</p> <p>Serial: Select this option if you want the role to be approved by the approvers the Approvers list. The approvers are processed sequentially in the order they appear in the list.</p> <p>Quorum: Select this option if you want the role to be approved in parallel and to be complete when the percentage of approvers specified is reached.</p> <p>For example, if you wanted to require that 25 percent of approvers in the list approve the condition, you would specify Quorum and specify a number; the value is assumed to be a percentage.</p>

Field	Description
<i>Approvers</i>	<p>An approver can be a user, group, or role. To add approvers:</p> <ol style="list-style-type: none"> 1. Click +. <p>If you are connected to the Identity Vault, the Browse Identity Vault dialog box automatically displays.</p> <ol style="list-style-type: none"> 2. Navigate the Identity Vault to locate your approvers. <p>To locate roles, navigate to the User Application driver's <code>AppConfig.RoleConfig.RoleDefs</code> container.</p> <ol style="list-style-type: none"> 3. Select the approver, then click <i>OK</i>. <p>If Designer is not able to connect to the Identity Vault, you can add the approver manually by clicking in the row and typing the approver's distinguished name, for example, <code>admin.novell</code>. Only deployed roles can be specified.</p>
<i>Custom Approval</i>	<p><i>Approval process definition:</i> Select a provisioning request definition to execute when the role is requested. The approvals displayed in this list have <i>Process type of Role Approval</i>.</p>

11.3.3 Role Properties Reference

Table 11-4 Role Overview Properties

Section	Field	Description
<i>Role</i>	<i>Identifier</i>	The unique identifier for the role.
	<i>Display Name</i>	The text displayed in the <i>Roles</i> tab of the User Application as the Role Name. You can translate this text into any of the languages supported by the User Application. For more information, see Section 2.10, "Localizing Provisioning Objects," on page 35.
	<i>Description</i>	The text displayed in the <i>Roles</i> tab of the User Application as the Role Description. You can translate this text into any of the languages supported by the User Application. For more information, see Section 2.10, "Localizing Provisioning Objects," on page 35.
<i>Categories</i>	<i>Available Categories</i>	Lists the categories that are available for the new role to be associated with. The items in this list are populated from the Role Category list in the directory abstraction layer.
	<i>Selected Categories</i>	Lists the categories that the new role is associated with. Use the <i>Add Category</i> and <i>Remove Category</i> buttons to associate the current role with one or more categories.
<i>Role Trustees</i>	<i>Trustees</i>	Specifies the users, groups, or containers that can read, compare, and browse the roles. (Read, compare, and browse are the default privileges.)

Section	Field	Description
Role Owners	Owners	A user who is designated as the owner of the role definition. When you generate reports against the Role Catalog, you can filter these reports based on the role owner. The role owner does not automatically have the authorization to administer changes to a role definition. In some cases, the owner must ask a role administrator to perform any administration actions on the role.

Table 11-5 Role Approval Properties

Section	Field	Description
Contained Roles	Contained Roles	One or more roles of a lower level than the one being defined.
Entitlements	Entitlements	One or more Identity Vault objects that represent a resource in a connected system.
Approval Options	No Approval	Select this option if the role does not require approval when requested.
	Standard Approval	Select this option if the role requires approval when requested, and you want the approval to execute the standard provisioning request definition that ships with the Roles Based Provisioning module. You must select the type of approval (serial or quorum) and the valid approvers.
	Approvers	An approver can be a user, group, or role.
	Custom Approval	<i>Approval process definition:</i> Select a provisioning request definition to execute when the role is requested. The approvals displayed in this list have <i>Process type</i> of <i>Role Approval</i> .

Table 11-6 Role Association Properties

Section	Field	Description
Resources	Resource Name	Name of the resource associated with the role.
	Association Description	Description of the reason for associating the resource with the role.
	Association Values	Values applied to the resource when the role is assigned.

11.4 About the Separation of Duties Editor

The Separation of Duties (SoD) editor allows you to:

- ◆ Define a separation of duties constraint (or rule).
- ◆ Define how to process requests for exceptions to the constraint.

Each SoD constraint represents a rule that makes two roles mutually exclusive. If a user is in one role, he or she cannot be in the second role, unless there is an exception allowed for that constraint. You can define whether exceptions to the constraint are always allowed or are only allowed through an approval flow.

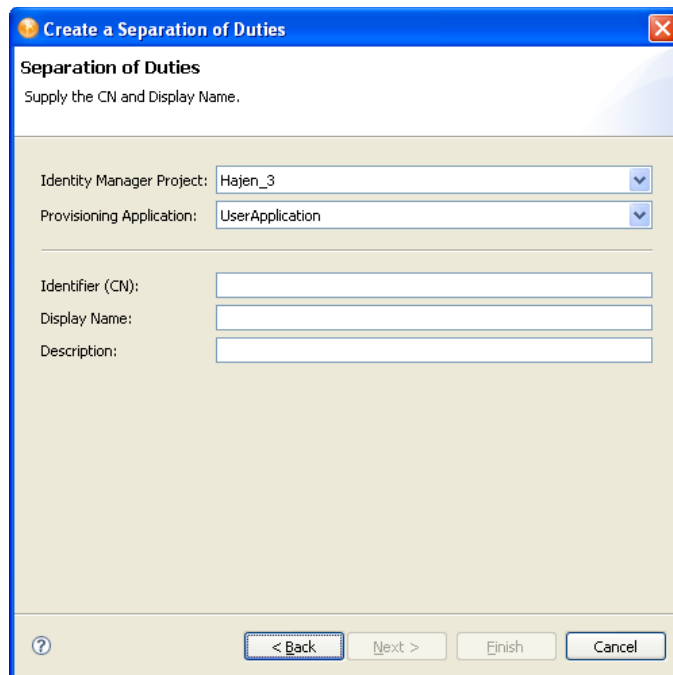
- ◆ [Section 11.4.1, “Using the Separation of Duties Editor,” on page 388](#)
- ◆ [Section 11.4.2, “Separation of Duties Constraints Properties,” on page 389](#)

11.4.1 Using the Separation of Duties Editor

To create a new separation of duties constraint:

- 1 Open the Separation of Duties Wizard in one of these ways:
 - ◆ From the *Provisioning view*, open *Role Catalog*, right-click *Separation of Duties*, then select *New*.
 - ◆ Select *File > New > Provisioning > Separation of Duties*.

The SoD Wizard displays:



- 2 Fill in the fields as follows:
 - * Indicates the field is required.

Field	Description
<i>Identity Manager Project and Provisioning Application*</i>	The name of the Identity Manager project and the provisioning application where you want to create the SoD. NOTE: These two fields display only when you launch the wizard from the <i>File</i> menu.
<i>Identifier (CN)*</i>	The unique identifier for the SoD.
<i>Display Name*</i>	The text used when the SoD name displays in the User Application. You can translate this text into any of the languages supported by the User Application. For more information, see Section 2.10, “Localizing Provisioning Objects,” on page 35.
<i>Description</i>	The text displayed as the SoD Description in the User Application. You can translate this text into any of the languages supported by the User Application. For more information, see Section 2.10, “Localizing Provisioning Objects,” on page 35

3 Click *Finish*.

Designer creates the SoD constraint and launches the SoD editor.

4 Fill in the fields as described in [Table 11-8, “Roles Configuration Properties,”](#) on page 393.

5 Save and deploy the constraint definition.

11.4.2 Separation of Duties Constraints Properties

[Table 11-7](#) describes the fields on the SoD property page.

- ♦ [“Using the Separation of Duties Properties”](#) on page 390
- ♦ [“Using the Role Search Dialog Box”](#) on page 391

Using the Separation of Duties Properties

Table 11-7 Separation of Duties Properties

Section	Field	Description
Separation of Duties Constraints	Identifier (CN)	Read-only. Unique ID for the SoD.
	Display Label	The text displayed as the <i>SoD Constraint Name</i> in the User Application. You can translate this text into any of the languages supported by the User Application. For more information, see Section 2.10, “Localizing Provisioning Objects,” on page 35.
	Description	The text displayed as the <i>SoD Constraint Description</i> field in the User Application. You can translate this text into any of the languages supported by the User Application. For more information, see Section 2.10, “Localizing Provisioning Objects,” on page 35.
Roles	Conflicting Role	<p>The name of the role for which you want to define a constraint.</p> <p>Click <i>Browse</i> to locate a specific role from the available roles. See “Using the Role Search Dialog Box” on page 391.</p> <p>A role defines a set of privileges related to one or more target systems or applications.</p>
	Conflicting Role	The name of the role in conflict. Click <i>Browse</i> to locate an existing role from the available roles. This search excludes the role already selected.
Sod Approval Definition	Approval Required	<p>Select Yes if you want to launch a workflow when a user requests an exception to the SoD constraint.</p> <p>Select No if the user can request an exception to the SoD constraint and no approval is required. In this case, the exception is never denied.</p>
	SoD Approval Definition	Displays the read-only name of the provisioning request definition that executes when a user requests an SoD constraint exception. The value is derived from the Roles Configuration object. It is only executed when the <i>Approval Type</i> is <i>SoD allowed with workflow</i> .
	Approval Type	A read-only field that displays the processing type for the provisioning request definition displayed above. This value is derived from the Roles Configuration object.
	Use Default Approvers	<p>Select Yes to use the default approvers defined in the Roles Configuration object. Does not enable the <i>Approvers</i> selection list in this property page.</p> <p>IMPORTANT: When you choose this option, you must define the approvers in the role configuration editor. If you do not specify approvers, you are able to deploy the SoD, but users encounter a runtime error because there are no approvers defined.</p> <p>Select No to enable the <i>Approvers</i> selection list in this property page.</p> <p>If you change the selection from <i>Yes</i> to <i>No</i> and then perform a Compare, the objects are considered equal. After you specify Approvers, the comparison is no longer equal.</p>

Section	Field	Description
<i>Approvers or Default Approvers</i>	<i>Approvers</i>	<p>An approver can be a user, group, or role. To add approvers:</p> <ol style="list-style-type: none"> 1. Click +. <p>If you are connected to the Identity Vault, the Browse Identity Vault dialog box automatically displays.</p> <ol style="list-style-type: none"> 2. Navigate the Identity Vault to locate your approvers. <p>To locate roles, navigate to the User Application driver's <code>AppConfig.RoleConfig.RoleDefs</code> container.</p> <ol style="list-style-type: none"> 3. Select the approver, then click <i>OK</i>. <p>If Designer is not able to connect to the Identity Vault, you can add the approver manually by clicking in the row and typing the approver's distinguished name, for example, <code>admin.novell</code>. Only deployed roles can be specified.</p>

Using the Role Search Dialog Box

The Role Search dialog box displays when you click *Browse* in the *Roles* section of the SoD editor. The dialog box helps you locate the existing roles for which you can create SoD constraints.

- 1 In the dialog box, specify the *CN*, *Display Name*, *Description*, *Role Category*, and *Role Level* on which you want to search.

For *CN*, *Display Name*, and *Description*, you can enter a wildcard (such as `S*`, `*S`) or regular expressions (such as `[A-Z][a-z]*`).

You can enter a value for all of the fields or none of the fields. If you do not supply a value in a particular field, the search returns all of the possible values for that field. If you enter a value in one or more of the fields, the values are ANDed together to create the search filter. The search occurs on the roles defined locally. Roles matching the search criteria are displayed in the *Matching Roles* selection list.

- 2 Select a role from the *Roles* selection list, then click *OK* to return to the SoD property page.

3 Click *OK*.

Clicking *OK* closes the Search for Role dialog box and populates the role in the SoD properties page. When no roles are available for the specified search criteria, the *OK* button is disabled.

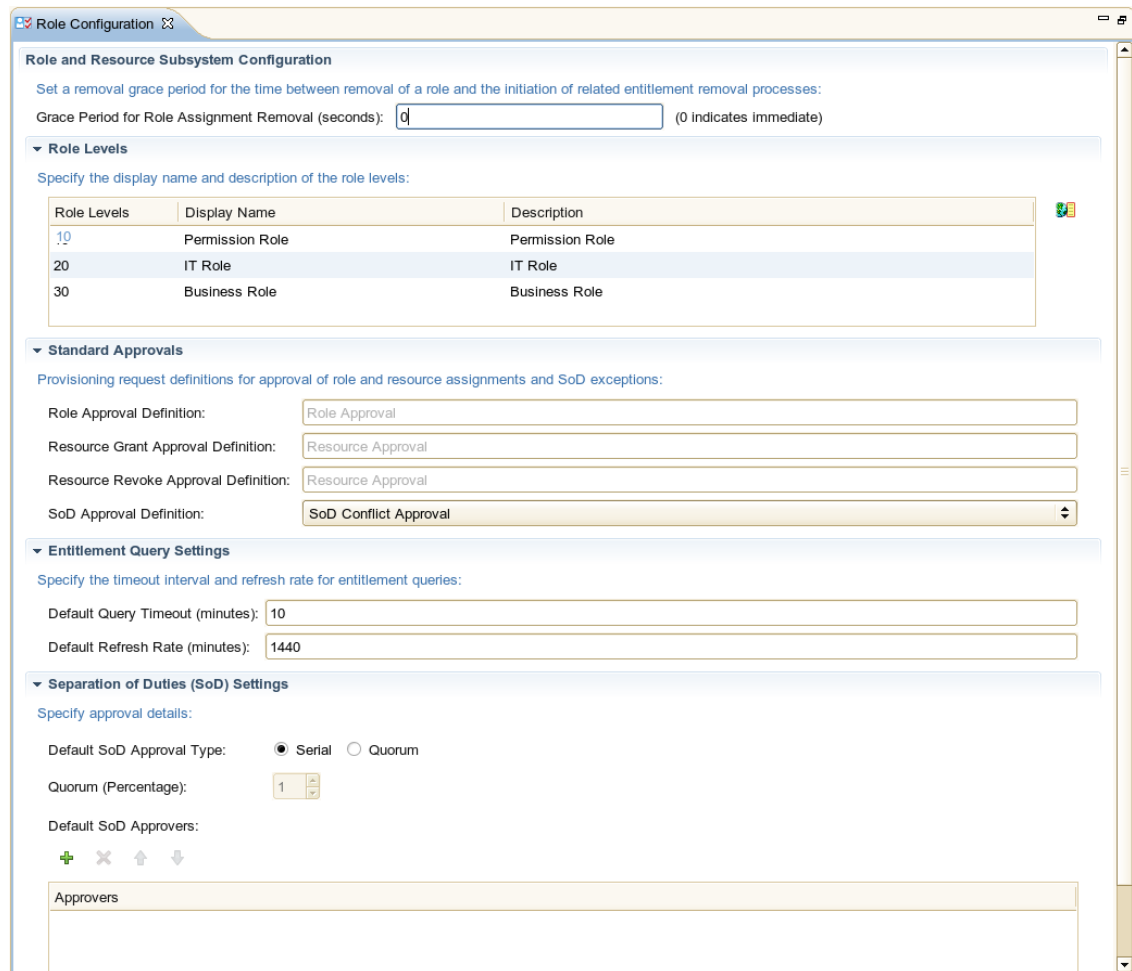
11.5 About the Role Configuration Editor

The role configuration editor is a graphical tool for defining administrative settings for the Roles Configuration object. The Roles Configuration object resides in the Role Catalog (nrfConfigurationobject), and it contains basic settings for an instance of the Role subsystem. There is only one configuration object per Role Catalog, and it resides at the root of the RoleConfig folder. The Roles Configuration object is a protected object, so the menu items *Cut* and *Delete* are disabled. You can copy and paste this object from another project; a paste operation overwrites the existing object.

To start the role configuration editor:

- 1 Expand the Provisioning view, then navigate to and open the Role Catalog.
- 2 Double-click the Role Configuration node.

Designer displays the role configuration editor.








- 3 Fill in the fields as described in [Table 11-8](#).

11.5.1 Role Configuration Editor Properties

The properties you set in the role configuration editor are described in [Table 11-8](#).

Table 11-8 Roles Configuration Properties

Category	Field	Description
General	<i>Grace Period for Role Assignment Removal (seconds)</i>	<p>Specifies the amount of time, in seconds, before a role assignment is removed from the Role Catalog.</p> <p>The value is 0 by default. A grace period of zero means that when someone is removed from a role assignment, the removal happens immediately and the subsequent revocation of entitlements is initiated immediately.</p> <p>You might use the grace period to delay the removal from a role of an account that would subsequently be re-added (for example if a person was being moved between containers). An entitlement can disable an account (this is the default) rather than removing it.</p>
Role Levels	<i>Role Levels</i>	<p>Read-only level that defines the role hierarchy. The hierarchy rules are:</p> <ul style="list-style-type: none">◆ Level 30 roles are higher-level roles in the hierarchy.◆ Level 20 and Level 10 roles are lower-level roles.◆ Level 30 roles include permissions from lower-level roles.◆ Lower-level roles have permissions that are included in higher-level roles.
	<i>Display Name</i>	<p>Specifies the text to display in the User Application <i>Roles</i> tab for each role level. By default, they are Permission Role (Level 10), IT Role (Level 20), and Business Role (Level 30). You can translate this text into any of the languages supported by the User Application. For more information, see Section 2.10, "Localizing Provisioning Objects," on page 35.</p> <p>The User Application caches this value in the RoleSystem cache holder. For your changes to Role Level Display Name to be visible in the User Application, you must flush the RoleSystem cache after you deploy the Role Configuration object.</p>
	<i>Description</i>	<p>Specifies the text to display in the User Application <i>Roles</i> tab for each Role Level Description. You can translate this text into any of the languages supported by the User Application. For more information, see Section 2.10, "Localizing Provisioning Objects," on page 35.</p> <p>The User Application caches this value in the RoleSystem cache holder. For your changes to Role Level Description to be visible in the User Application, you must flush the RoleSystem cache after you deploy the Role Configuration object.</p>

Category	Field	Description
Separation of Duties (SoD) Settings	Approval Type	<p>Select <i>Serial</i> if you want the SoD to be approved sequentially by the approvers in the order they appear in the approvers list.</p> <p>Select <i>Quorum</i> if you want the SoD to be approved in parallel and to be complete when the percentage of users specified is reached.</p> <p>For example, if you wanted to require that 25 percent of approvers in the list approve the condition, you would specify Quorum and specify a number; the value is assumed to be a percentage.</p>
	Approvers	<p>The actual list of individuals, users, groups, or roles that can approve or deny an SoD exception/override. This list can be overridden in the definition of an SoD constraint in the SoD editor. You can use the following buttons to manage the <i>Approvers</i> list:</p> <ul style="list-style-type: none"> ◆  Click to add an approver. Adds the name to the bottom of the list. ◆  Click to delete the selected approver. ◆  Click to access the Identity Vault to search for an approver to add. ◆  Click to move an approver lower on the list. ◆  Click to move an approver higher on the list.
Standard Approvals	Role Approval Definition	Read-only name of the provisioning request definition that runs for a role approval request for this driver.
	SoD Approval Definition	Read-only name of the provisioning request definition that runs for a SoD exception approval for this driver.
	Resource Grant Approval Definition	Read-only name of the provisioning request definition that runs for a resource grant approval request for this driver.
	Resource Revoke Approval Definition	Read-only name of the provisioning request definition that runs for a resource revoke approval request for this driver.
Entitlement Query Settings	Default Query Timeout (minutes)	<p>The Roles Based Provisioning Module periodically queries the external entitlement system to refresh the details of the entitlements that are displayed in the <i>Resource Catalog</i>.</p> <p>You can limit the time that the system waits for the query result by using the <i>Default Query Timeout</i> option.</p>
	Default Refresh Rate (minutes)	For the entitlement queries, you can set the time that the system waits for the query result by using the <i>Default Refresh Rate</i> option.

11.6 Importing Roles Defined in CSV Files

The Role Catalog provides a wizard for importing roles defined in a comma-separated values (CSV) file. For example, if you define the set of roles you want to implement by using a spreadsheet, you can export the definitions of those roles to a CSV file format, then use the Import Roles Wizard to add the roles to the Role Catalog.

- ◆ [Section 11.6.1, “Setting Up the File to Import,” on page 395](#)
- ◆ [Section 11.6.2, “Required CSV File Format,” on page 398](#)
- ◆ [Section 11.6.3, “Using the Wizard to Import Roles,” on page 398](#)
- ◆ [Section 11.6.4, “Error Handling,” on page 400](#)

11.6.1 Setting Up the File to Import

When you create a file to use as input to the Import Roles wizard, you must follow the column layout defined in [Table 11-9](#). In addition, you must also follow the CSV file format described in [Section 11.6.2, “Required CSV File Format,” on page 398](#).

Table 11-9 *Import Record Format*

Column Number	Field Name	Description
1	role level	<p>Required field. Valid role levels are: 10, 20, and 30.</p> <ul style="list-style-type: none">◆ 10: Permission Role◆ 20: IT Role◆ 30: Business Role <p>If an invalid role level is specified, the wizard writes the role record to the error file. It does not create the role.</p> <p>For example:</p> <pre>30</pre>
2	sub-container	<p>Optional field. The name of the subcontainer relative to the role level. The wizard creates any subcontainers that do not exist. There is no limit on the number of subcontainers, but five levels is the recommended maximum depth.</p> <p>For example:</p> <pre>"System\OTB"</pre>
3	id	<p>Required field. The role's identifier (CN). This name must be unique within the role level. If the CSV file contains multiple rows with the same ID, the wizard imports and creates a record for the first one it encounters. It then writes any subsequent records with the same ID to the error file.</p> <p>For example:</p> <pre>"Doctor"</pre>

Column Number	Field Name	Description
4	localized display names	<p>Optional field. The the translated string used to display the role name. Accepts zero or more values. The value must be in this format:</p> <pre>"java-locale-code~string"</pre> <p>The ~ delimits the locale and its localized string. The symbol delimits each set of locale data.</p> <p>For example:</p> <pre>"en~Doctor it~Dottore fr~Docteur"</pre> <p>If you do not want to localize display names, you can supply a single string. The wizard uses this string as the value for the default Designer locale upon import. If no value is present when you attempt to deploy the associated role, Designer generates a validation error.</p>
5	localized descriptions	<p>Optional field. The translated string used to display the role description. Accepts a list of zero or more values. The value must be in this format:</p> <pre>"java-locale-code~string"</pre> <p>The ~ delimits the locale and its localized string. The symbol delimits each set of locale data.</p> <p>For example:</p> <pre>"en~Doctor it~Dottore fr~Docteur"</pre> <p>If you do not want to localize descriptions, you can supply a single string. The wizard uses this string as the value for the default Designer locale upon import. If no value is present when you attempt to deploy the associated role, Designer generates a validation error.</p>
6	categories	<p>Required field. This value should map to a valid category key based on the Role Category list defined in the directory abstraction layer. Accepts a list of zero or more values.</p> <p>If you do not specify a value, the wizard inserts the role category key <code>default</code>.</p> <p>If the value is invalid (it does not exist in the directory abstraction layer), the wizard still includes it in the newly created role; however, Designer's validation requires that this be fixed before the role can be deployed.</p> <p>For example:</p> <pre>"system doctor nurse"</pre>
7	owners	<p>Optional field. Represents the distinguished name of the owner of the role. Accepts a list of zero or more values.</p> <p>For example:</p> <pre>"admin.novell ablake.users.medical-idmsample.novell"</pre>

Column Number	Field Name	Description
8	trustees	<p>Optional field. Represents the distinguished name of the trustees of the role. Accepts a list of zero or more values.</p> <p>For example:</p> <pre>"admin.novell ablake.users.medical-idmsample.novell"</pre>
9	contained roles	<p>Optional field. The role level and common name (CN) of the child or contained roles. Accepts zero or more values.</p> <p>For example:</p> <pre>"10~Administer Drugs 10~Fill Prescriptions"</pre>
10	entitlements	<p>Optional field. DN and parameter values of the role's entitlements. Accepts zero or more values.</p> <p>For example:</p> <pre>"Groups.GroupEntitlementLoopback.TestDrivers.novell~MedicalOperations Groups.GroupEntitlementLoopback.TestDrivers.novell~Pharmacy"</pre>
11	approval workflow	<p>Optional field. Specifies the name of the provisioning request common name and its quorum value. Valid values include:</p> <ul style="list-style-type: none"> ◆ None: Provide the empty string "". ◆ Standard: Supply key word <code>Standard</code> followed by the quorum value. For example: <pre>"Standard~50"</pre> ◆ Custom: Enter the provisioning request definition CN. For example: <pre>"MyCustomPrdCN"</pre> <p>Specify Quorum values as follows:</p> <ul style="list-style-type: none"> ◆ Serial: Specify a quorum value of 0. ◆ Quorum percentage: Specify a value between 1-100.
12	approvers	<p>Optional field. Represents the distinguished name (DN) of the approvers when the approval workflow value is <i>Standard</i>. The order of the approvers in this field is important if the quorum value is <i>serial</i>. Accepts zero or more values.</p> <p>For example:</p> <pre>"admin.novell ablake.users.medical-idmsample.novell"</pre> <p>If the approval workflow is not <i>Standard</i> and you specify a list of approvers, the wizard writes the record to the error file because approvers are not valid.</p>

General Field Formatting Rules

- ♦ Multi-value properties: Use the | symbol as the delimiter between values.
- ♦ DN properties: Specify in dot notation. Designer validates these properties on deploy to ensure that the values correspond to existing Identity Vault objects.
- ♦ Character set encoding must be UTF-8

11.6.2 Required CSV File Format

When you create your spreadsheet to use as input to the Import Roles Wizard, keep in mind that the wizard expects a specific format. It expects a twelve-column document with the columns defined in the order described in [Table 11-9 on page 395](#). The wizard also expects the input file to follow the CSV format rules defined in RFC4180. This format is briefly summarized below:

- ♦ Each role record is on a separate line.
- ♦ Each field in a role record is separated by a comma and is quoted.
- ♦ Each line is delimited by a line break (CRLF)
- ♦ The first line of the file can be a header line, but this is optional. The wizard allows you to identify whether the file contains a header line.
- ♦ If your file contains a header line, it must contain the role record's field names. The header line field count must correspond to the field count of each line in the file.
- ♦ Quotes on numbers are not required.
- ♦ A role record example:

```
20, "  
", "Doctor", "en~Doctor|it~Dottore|fr~Docteur", "en~Doctor|it~Dottore|fr~Docteur"  
, "doctor", , "admin.novell|ablake.users.medical-  
idmsample.novell", , "Groups.GroupEntitlementLoopback.TestDrivers.novell~Medical  
Operations|Groups.GroupEntitlementLoopback.TestDrivers.novell~Pharmacy", ,
```

- ♦ Quotes and nested quotes: You can use single quotes within a text field (such as Display name). Use double quotes to enclose a column.

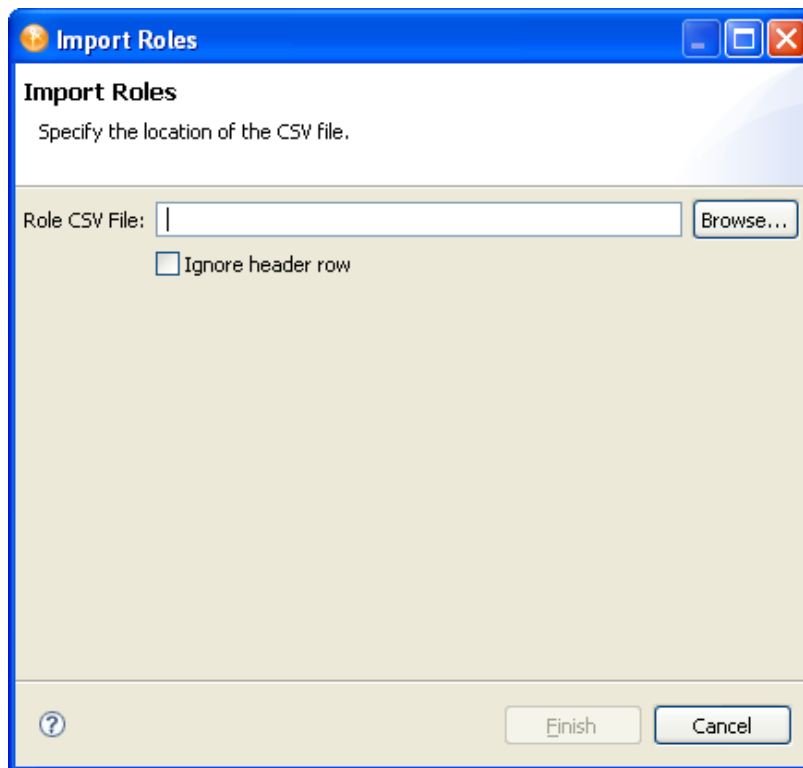
NOTE: For optional fields, the line must include an empty string "" as a placeholder.

11.6.3 Using the Wizard to Import Roles

- 1 Open the Provisioning view of the Designer project where you want to import the roles.
- 2 Right-click a *Role Catalog*, the *Roles* node, or a role level (such as *Business Role*), then select *Import from CSV*.

Designer launches the wizard.

If you select a role level, the wizard imports only the roles for that level and ignores the other roles in the file.



3 Fill in the fields as follows:


Field Name	Description
<i>Role CSV File</i>	Specify the name and location of the CSV file you want to import.
<i>Ignore header row</i>	If the file you specify contains a header row, then select <i>Ignore header row in CSV file</i> .

4 Click *Finish*.

The wizard reads the CSV file and adds all of the roles that meet the criteria for import. If the wizard encounters an error (see [Error Handling](#) for a list of possible errors), the wizard writes the role record to an error file. The wizard creates the error file in the same location as the Role CSV file to import, and it names the file the same name as the Role CSV file with the `_errors` appended to the name.

Only the errors identified in [Error Handling](#) are severe enough to prevent the wizard from creating the role. If the wizard encounters other types of errors, it adds the role, but you must make corrections before the role can be deployed. For example, if the category specified in the role is not yet added to the directory abstraction layer role category list, the role can be added, but Designer displays the role with an informational message as shown in [Figure 11-1](#).

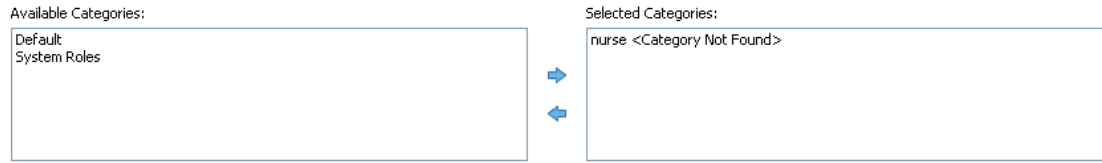Figure 11-1 Role Imported with Invalid Category Specified



Roles that are created with errors like this cannot be deployed until the errors are corrected. The Project Checker notifies you of the errors if you attempt to deploy the roles or if you validate the roles objects.

TIP: If the role has no category, the wizard adds the Default category. If the category supplied does not exist, then it causes the error shown in [Figure 11-1 on page 400](#).

11.6.4 Error Handling

[Table 11-10 on page 400](#) describes the cases where a role cannot be imported. When the wizard encounters these errors, it generates an error file and writes the complete role record to the file. It maintains the role's original column order except that it inserts a new column as the first column in the record. This column includes the error code. You can modify the associated role to fix the error directly within the error file, delete the error code column, then specify this error file as input to the wizard.

Table 11-10 CSV Import Wizard Error Codes

Error Code	Description
INVALID_LEVEL	The row contains a container level that is not valid. This can occur if the level is missing or is not one of these values: 10, 20, or 30. To fix this problem, change the level to 10, 20, or 30.
ROLE_ID_NOT_UNIQUE	A role with the specified ID in that level already exists. To fix this problem change the ID or the role level.
INVALID_SUBCONTAINER_NAME	The subcontainer name can contain only: alphanumeric characters, digits, underscore, and spaces. To fix this problem, update the subcontainer name to follow these rules.
INVALID_ID_NAME	The role ID contains invalid characters. To fix this problem, edit the name to follow the rules for valid characters: alphabetic characters, digits, underscores, and spaces.
INVALID_ROLE_CN	

12 Configuring Resources

This section describes how to use the Resource editor to configure resources and entitlements.

- ♦ [Section 12.1, “About Resources,” on page 401](#)
- ♦ [Section 12.2, “About the Resource Editor,” on page 401](#)
- ♦ [Section 12.3, “Importing Resources Defined in CSV Files,” on page 408](#)

12.1 About Resources

A resource is any digital entity such as a user account, computer, or database that a business user needs to be able to access. The User Application provides a convenient way for end users to request the resources they need. In addition, it provides tools that administrators can use to define resources. Each resource is mapped to an entitlement. A resource definition can have no more than one entitlement bound to it. A resource definition can be bound to the same entitlement more than once, with different entitlement parameters for each resource.

12.2 About the Resource Editor

- ♦ [Section 12.2.1, “Using the Resource Editor,” on page 401](#)
- ♦ [Section 12.2.2, “Resource Property Reference,” on page 407](#)

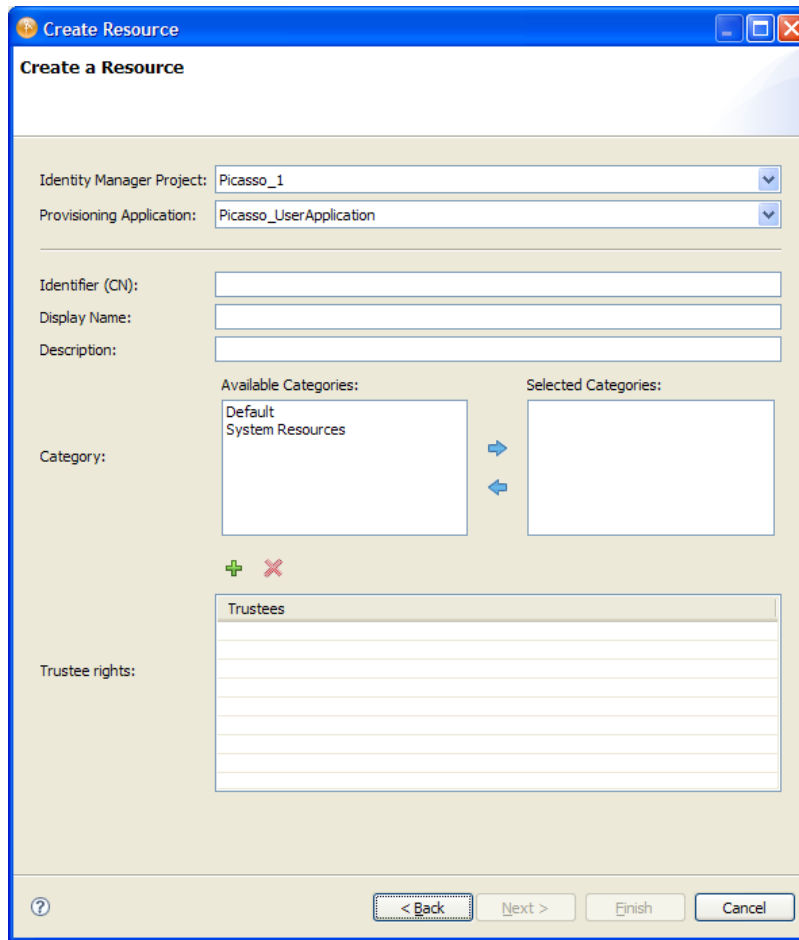
12.2.1 Using the Resource Editor

- ♦ [“Creating Resources” on page 401](#)
- ♦ [“Specifying Entitlements” on page 403](#)
- ♦ [“Specifying Request Form” on page 405](#)
- ♦ [“Specifying Approvals” on page 405](#)

Creating Resources

- 1 Open the Create Resource Wizard in one of these ways:
 - ♦ From the Provisioning view, open *Role Catalog*, right-click *Resources*, then select *New*.
 - ♦ Select *File > New > Provisioning > Resource*.

The Create Resource Wizard displays:




2 Fill in the fields as follows (*indicates a required field).

Field	Description
<i>Identity Manager Project and Provisioning Application</i> *	The name of the Designer project and the provisioning application where you want to create the resources. NOTE: These two fields display when you launch the wizard from the <i>File</i> menu.
<i>Identifier (CN)</i> *	The unique identifier for the resource.
<i>Display Name</i> *	The text displayed as the <i>Resource Name</i> field in the User Application. You can translate this text into any of the languages supported by the User Application. For more information, see Section 2.10, "Localizing Provisioning Objects," on page 35
<i>Description</i>	The text displayed as the <i>Resource Description</i> in the User Application. You can translate this text into any of the languages supported by the User Application. For more information, see Section 2.10, "Localizing Provisioning Objects," on page 35 .
<i>Category</i> *	Allows you to categorize resources. Used for filtering resource lists in the User Application. The category names are defined in the directory abstraction layer Resource Category list.


Field	Description
<i>Trustee Rights</i>	Specifies the users, groups, or containers that can read, compare, and browse the resources. (Read, compare, and browse are the default privileges.)

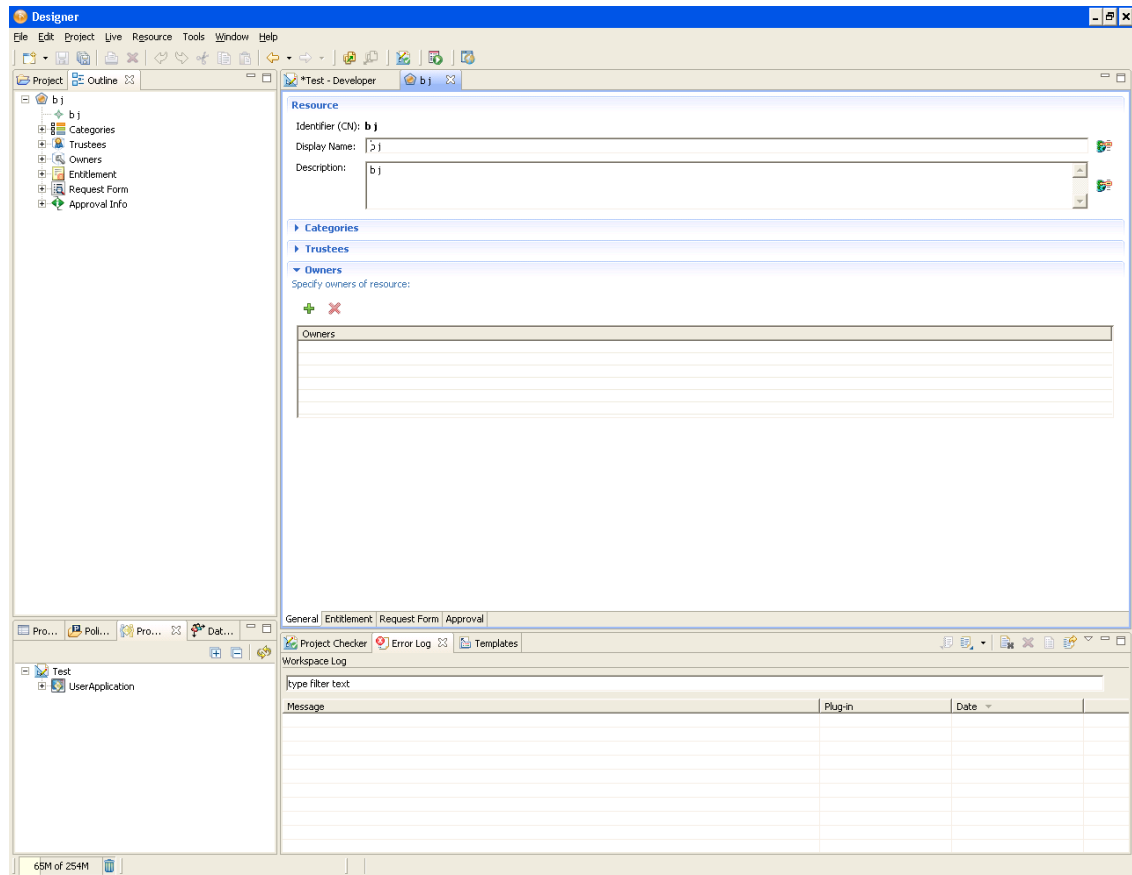- Click *Finish*. Designer creates the resource locally and opens the Resource editor. Use the *General* tab to modify the values you entered in the wizard, and to specify a Resource Owner. For more information on the *General* properties, see [Table 12-2 on page 407](#).



Specifying Entitlements

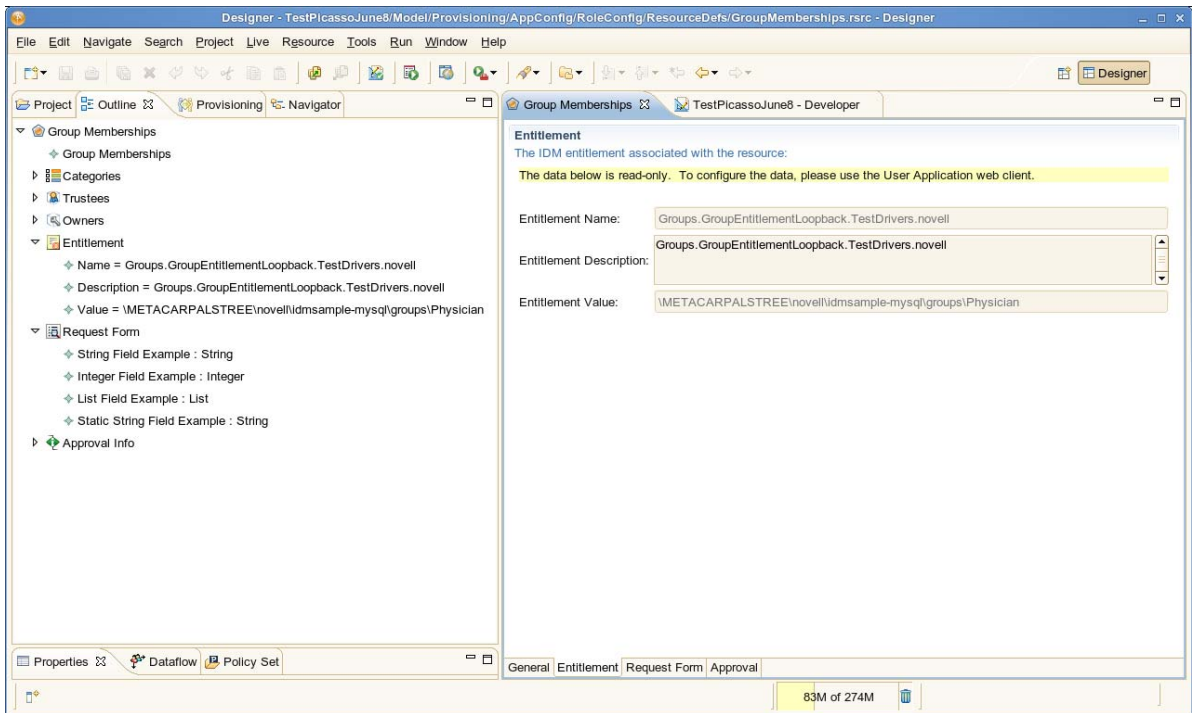Navigate to the *Entitlement* tab. The Entitlement page is in read-only mode. It shows entitlements associated with a resource.



Field

Description

Entitlement Name

The description of the entitlement if the entitlement has been imported and is known to the Designer Identity Vault. Otherwise, it is simply the entitlement DN.

Entitlement Description

Information about the entitlement description. It could also be the entitlement DN.

Entitlement Value

The entitlement value can be static or dynamic.

- ◆ If it is static, the value displayed is the one chosen by the resource administrator when the resource was created.
 - ◆ If it is dynamic, the *Entitlement Value* is set at the request time under the specified *Request Form* field.
-

Specifying Request Form

Navigate to the *Request Form* tab. The *Request Form* page is in read-only mode. The information is displayed in the *Request Form* fields when a Resource is requested.


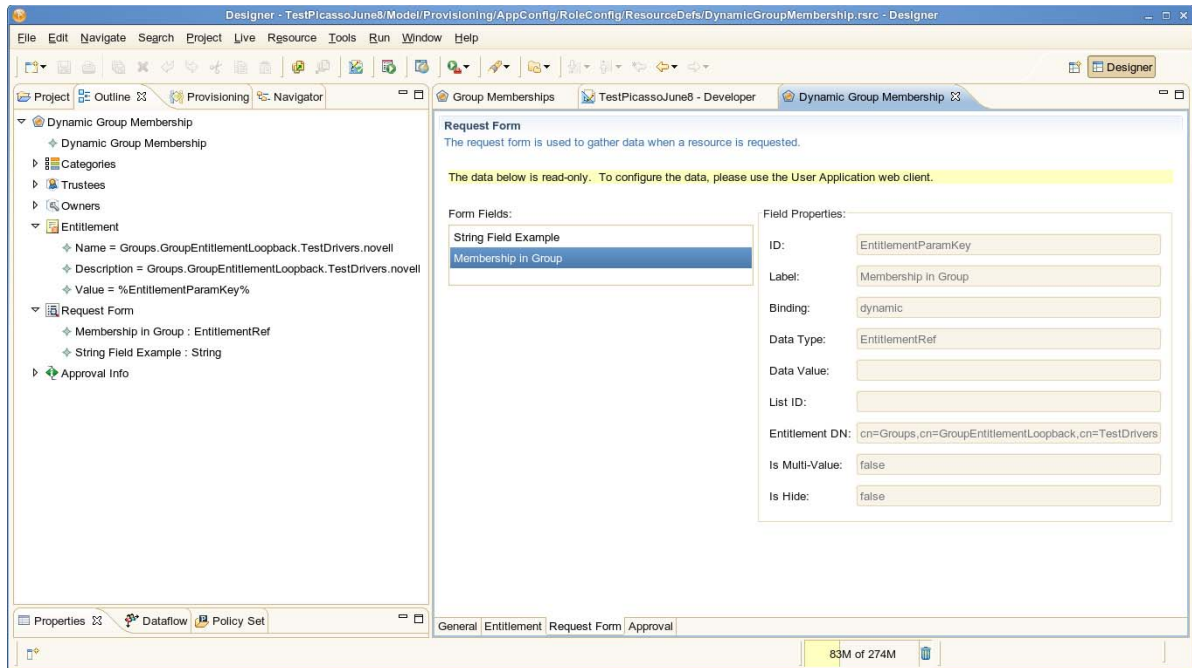


Table 12-1 Form Field Properties

Field	Description
<i>ID</i>	The system-generated ID for the field.
<i>Label</i>	The display label to be used on the field.
<i>Binding</i>	<ul style="list-style-type: none"> ◆ Static, if the value is assigned at design time. ◆ Dynamic, if the value is assigned at request time.
<i>Data Type</i>	Can be a String, Integer, Boolean, List, or EntitlementRef type.
<i>Data Value</i>	The binding value can be static or dynamic. <ul style="list-style-type: none"> ◆ If it is static, it uses the value specified by the Resource Administrator. ◆ If it is dynamic, the value is specified at request time.
<i>List ID</i>	If the <i>Data Type</i> is List, then a <i>List ID</i> is specified.
<i>Entitlement DN</i>	If the <i>Data Type</i> is EntitlementRef, then an <i>Entitlement DN</i> is specified.
<i>Is Multi-Value</i>	Boolean. True, if users can specify more than one value for this field, else False.
<i>Is Hide</i>	Boolean. True, if the value is hidden during the request time.

Specifying Approvals

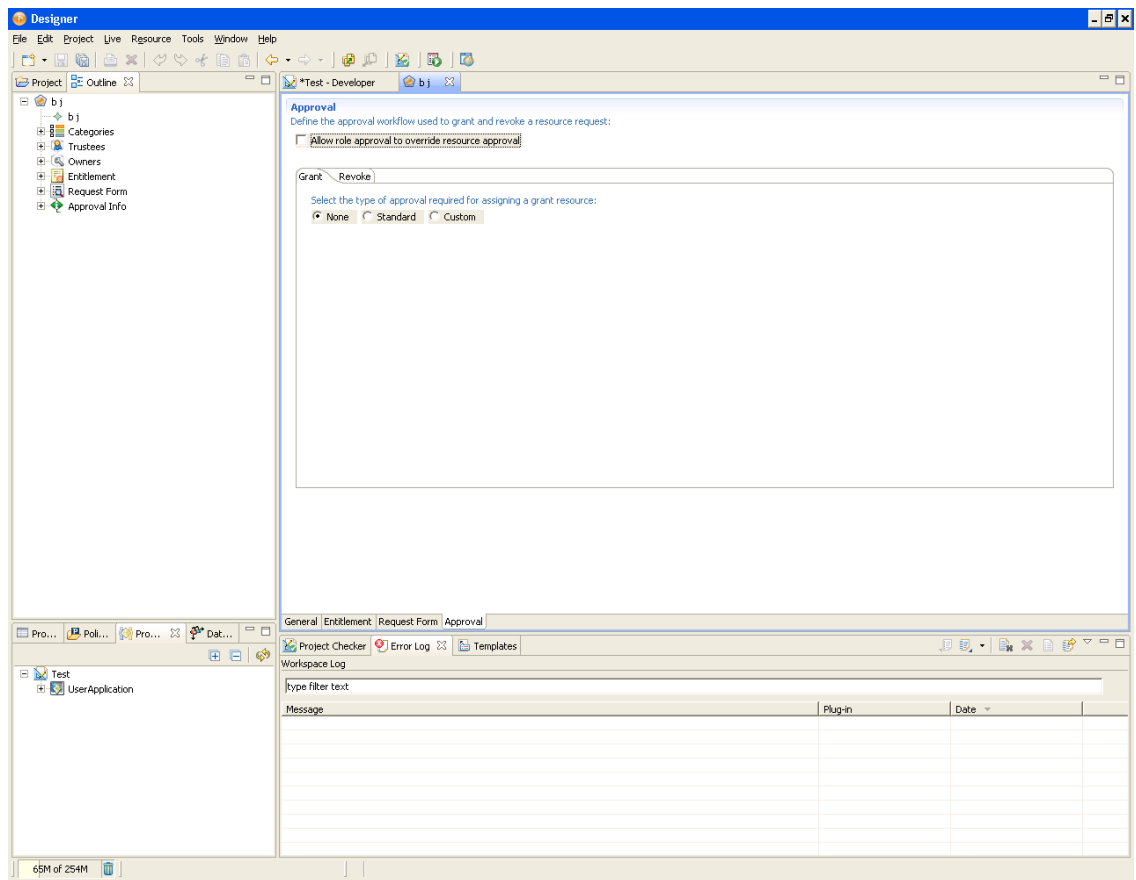- 1 Navigate to the *Approvals* tab.



- 2 Select *Allow role approval to override resource approval* when you want the requesting system (such as role provisioning) to override approvals of the resource provisioning.
- 3 Click the *Grant* or *Revoke* tab, then select the type of grant or revoke for the resource.
 - ◆ *None*: Select this option when no approval is required for a resource grant or revoke request. Continue with [Step 5](#).
 - ◆ *Standard*: Select this option if the resource requires approval for a grant or revoke request, and you want the approval to execute the standard provisioning request definition that ships with the Roles Based Provisioning Module. Continue with [Step 4](#).
 - ◆ *Custom*: Select this option when you want to specify a custom provisioning request definition for granting or revoking resources. You are prompted to select a provisioning request definition from the dropdown list. The list is populated with approvals whose Process Type is Resource. Continue with [Step 5](#).
- 4 For Standard Approval types, fill in the fields as follows:

Field	Description
<i>Approval Type</i>	<p>Serial: Select this option if you want the resource grant or revoke request to be approved by the approvers listed in the Approvers list. The approvers are processed sequentially in the order they appear in the list.</p> <p>Quorum: Select this option if you want the resource grant or revoke request to be approved in parallel and to be complete when the percentage of approvers specified is reached. For example, if you wanted to require that 25 percent of approvers in the list approve the condition, you would specify Quorum and specify a number; the value is assumed to be a percentage.</p>
<i>Approvers</i>	<p>An approver can be a user, group, or role. To add approvers:</p> <ol style="list-style-type: none"> 1. Click +. <p>If you are connected to the Identity Vault, the <i>Browse Identity Vault</i> dialog box automatically displays.</p> 2. Navigate the Identity Vault to choose your approvers. <p>To locate roles, navigate to the User Application driver's <code>AppConfig.RoleConfig.ResourceDefs</code> container.</p> 3. Select the approver, then click <i>OK</i>. <p>If Designer is not able to connect to the Identity Vault, you can add the approver manually by clicking in the row and typing the approver's distinguished name, for example, <code>admin.novell</code>. Only deployed roles can be specified.</p>

5 Save the Resource definition.

12.2.2 Resource Property Reference

Table 12-2 *Resource Overview Properties*

Property	Description
Identifier (CN)	The unique identifier for the resource.
Display Name	The text displayed as the <i>Resource Name</i> field in the User Application. You can translate this text into any of the languages supported by the User Application. For more information, see Section 2.10, "Localizing Provisioning Objects," on page 35
Description	The text displayed as the <i>Resource Description</i> in the User Application. You can translate this text into any of the languages supported by the User Application. For more information, see Section 2.10, "Localizing Provisioning Objects," on page 35 .
Categories	Allows you to categorize resources. Used for filtering resource lists in the User Application. The category names are defined in the directory abstraction layer Resource Category list.
Trustees	Specifies the users, groups, or containers that can read, compare, and browse the resources. (Read, compare, and browse are the default privileges.)

Property	Description
Owners	A user who is designated as the owner of the resource definition. The resource owner does not automatically have the authorization to administer changes to a resource definition.

12.3 Importing Resources Defined in CSV Files

The Resource Catalog provides a wizard for importing resources defined in a comma-separated values (CSV) file. For example, if you define the set of resources you want to implement by using a spreadsheet, you can export the definitions of those resources to a CSV file format, then use the Import Resources wizard to add the resources to the Resource Catalog.

- [Section 12.3.1, “Setting Up the File to Import,” on page 408](#)
- [Section 12.3.2, “Required CSV File Format,” on page 411](#)
- [Section 12.3.3, “Using the Wizard to Import Roles from a CSV File,” on page 412](#)
- [Section 12.3.4, “Error Handling,” on page 413](#)

12.3.1 Setting Up the File to Import

When you create a file to use as input to the Import Resources Wizard, you must follow the column layout defined in [Table 12-3](#). In addition, you must also follow the CSV file format described in [Section 12.3.2, “Required CSV File Format,” on page 411](#).

Table 12-3 *Import Record Format*

Column Number	Field Name	Description
1	id	<p>Required field. The resource’s identifier (CN). This name must be unique . If the CSV file contains multiple rows with the same ID, the wizard imports and creates a record for the first one it encounters. It then writes any subsequent records with the same ID to the error file.</p> <p>For example:</p> <p>"Doctor"</p>

Column Number	Field Name	Description
2	localized display names	<p>Optional field. The translated string used to display the resource name. Accepts zero or more values. The value must be in this format:</p> <pre>"java-locale-code~string"</pre> <p>The ~ delimits the locale and its localized string. The symbol delimits each set of locale data.</p> <p>For example:</p> <pre>"en~Doctor it~Dottore fr~Docteur"</pre> <p>If you do not want to localize display names, you can supply a single string. The wizard uses this string as the value for the default Designer locale upon import. If no value is present when you attempt to deploy the associated resource, Designer generates a validation error.</p>
3	localized descriptions	<p>Optional field. The translated string used to display the resource description. Accepts a list of zero or more values. The value must be in this format:</p> <pre>"java-locale-code~string"</pre> <p>The ~ delimits the locale and its localized string. The symbol delimits each set of locale data.</p> <p>For example:</p> <pre>"en~Doctor it~Dottore fr~Docteur"</pre> <p>If you do not want to localize descriptions, you can supply a single string. The wizard uses this string as the value for the default Designer locale upon import. If no value is present when you attempt to deploy the associated resource, Designer generates a validation error.</p>
4	categories	<p>Required field. This value should map to a valid category key based on the resource Category list defined in the directory abstraction layer. Accepts a list of zero or more values.</p> <p>If you do not specify a value, the wizard inserts the resource category key default.</p> <p>If the value is invalid (it does not exist in the directory abstraction layer), the wizard still includes it in the newly created resource; however, Designer's validation requires that this be fixed before the resource can be deployed.</p>
5	owners	<p>Optional field. Represents the distinguished name of the owner of the resource. Accepts a list of zero or more values.</p> <p>For example:</p> <pre>"admin.novell ablake.users.medical-idmsample.novell"</pre>

Column Number	Field Name	Description
6	trustees	<p>Optional field. Represents the distinguished name of the trustees of the resource. Accepts a list of zero or more values.</p> <p>For example:</p> <pre>"admin.novell ablake.users.medical-idmsample.novell"</pre>
7	Grant Approvers	<p>Optional field. Represents the distinguished name (DN) of the approvers when the approval workflow value is Standard. The order of the approvers in this field is important if the quorum value is serial. Accepts zero or more values.</p> <p>For example:</p> <pre>"admin.novell ablake.users.medical-idmsample.novell"</pre> <p>If the approval workflow is not Standard and you specify a list of approvers, the wizard writes the record to the error file because approvers are not valid.</p>
8	Grant Approvers Workflow	<p>Optional field. Specifies the name of the provisioning request common name and its quorum value. Valid values include:</p> <ul style="list-style-type: none"> ◆ None: Provide the empty string "". ◆ Standard: Supply key word Standard followed by the quorum value. For example: <pre>"Standard~50"</pre> ◆ Custom: Enter the provisioning request definition CN. For example: <pre>"MyCustomPrdCN"</pre> <p>Specify Quorum values as follows:</p> <ul style="list-style-type: none"> ◆ Serial: Specify a quorum value of 0. ◆ Quorum percentage: Specify a value between 1-100.
9	Revoke Approvers	<p>Optional field. Represents the distinguished name (DN) of the approvers when the approval workflow value is Standard. The order of the approvers in this field is important if the quorum value is serial. Accepts zero or more values.</p> <p>For example:</p> <pre>"admin.novell ablake.users.medical-idmsample.novell"</pre> <p>If the approval workflow is not Standard and you specify a list of approvers, the wizard writes the record to the error file because approvers are not valid.</p>

Column Number	Field Name	Description
10	Revoke Approvers Workflow	<p>Optional field. Specifies the name of the provisioning request common name and its quorum value. Valid values include:</p> <ul style="list-style-type: none"> ◆ None: Provide the empty string " ". ◆ Standard: Supply the keyword Standard followed by the quorum value. For example: "Standard~50" ◆ Custom: Enter the provisioning request definition CN. For example: "MyCustomPrdCN" <p>Specify Quorum values as follows:</p> <ul style="list-style-type: none"> ◆ Serial: Specify a quorum value of 0. ◆ Quorum percentage: Specify a value between 1-100.
11	Role Approval overrides Resource Approval	Boolean field for Role Approval to override Resource Approval. It takes True or False.

General Field Formatting Rules

- ◆ Multi-value properties: Use the | symbol as the delimiter between values.
- ◆ DN properties: Specify in dot notation. Designer validates these properties on deploy to ensure that the values correspond to existing Identity Vault objects.
- ◆ Character set encoding must be UTF-8.

12.3.2 Required CSV File Format

When you create your spreadsheet to use as input to the Import Resources Wizard, keep in mind that the wizard expects a specific format. It expects a twelve-column document with the columns defined in the order described in [Table 12-3](#). The wizard also expects the input file to follow the CSV format rules defined in RFC4180. This format is briefly summarized below:

- ◆ Each Resource record is on a separate line.
- ◆ Each field in a Resource record is separated by a comma and is quoted.
- ◆ Each line is delimited by a line break (CRLF).
- ◆ The first line of the file can be a header line, but this is optional. The wizard allows you to identify whether the file contains a header line.
- ◆ If your file contains a header line, then it must contain the Resource record's field names. The header line field count must correspond to the field count of each line in the file.
- ◆ Quotes on numbers are not required.
- ◆ A resource record example:


Doctor, en~Doctor, en~Doctor|it~Dottore|fr~Docteur,, admin.novell|ablake.users.medical-idmsample.novell, admin.novell|ablake.users.medical-idmsample.novell, admin.novell|ablake.users.medical-idmsample.novell, Standard~50, admin.novell|ablake.users.medical-idmsample.novell, MyCustomPrdCN, true

- ♦ Quotes and nested quotes: You can use single quotes within a text field (such as Display name). Use double quotes to enclose a column.

NOTE: For optional fields, the line must include an empty string " " as a placeholder.

12.3.3 Using the Wizard to Import Roles from a CSV File

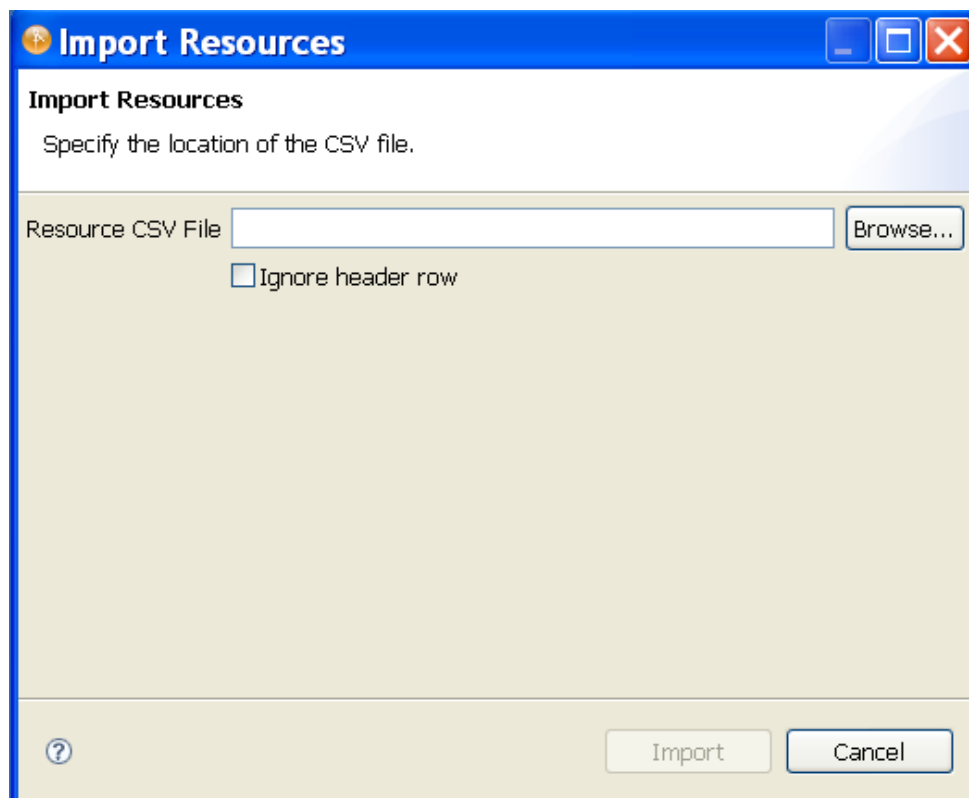- 1 Open the Provisioning view of the Designer project where you want to import the roles. Select the *Resources* node, right-click then select *Import from CSV*. Designer launches the wizard.



- 2 Fill in the fields as follows:

Field Name	Description
<i>Role CSV File</i>	Specify the name and location of the CSV file you want to import.
<i>Ignore header row</i>	If the file you specify contains a header row, select <i>Ignore header row</i> in CSV file.

- 3 Click *Finish*.

The wizard reads the CSV file and adds all the resources that meet the criteria for import. If the wizard encounters an error (see Error Handling for a list of possible errors), the wizard writes the role record to an error file. The wizard creates the error file in the same location as the Role CSV file to import, and it names the file the same name as the Resource CSV file with the `_errors` appended to the name.

Only the errors identified in [Error Handling](#) are severe enough to prevent the wizard from creating the resource. If the wizard encounters other types of errors, it adds the resource, but you must make corrections before the resource can be deployed. For example, if the category specified in the role is not yet added to the directory abstraction layer role category list, the resource can be added, but Designer displays the resource with an informational message.

Resource that are created with errors like this cannot be deployed until the errors are corrected. The Project Checker notifies you of the errors if you attempt to deploy the resource or if you validate the resource objects.

12.3.4 Error Handling

[Table 12-4](#) describes the cases where a resource cannot be imported. When the wizard encounters these errors, it generates an error file and writes the complete resource record to the file. It maintains the resource original column order except that it inserts a new column as the first column in the record. This column includes the error code. You can modify the associated resource to fix the error directly within the error file, delete the error code column, then specify this error file as input to the wizard.

Table 12-4 CSV Import Wizard Error Codes

Error Code	Description
RESOURCE_ID_NOT_UNIQUE	A resource with the specified ID already exists.
INVALID_ID_NAME	The resource ID contains invalid characters. To fix this problem, edit the name to follow the rules for valid characters: alphabetic characters, digits, underscores, and spaces.
INVALID_RESOURCE_CN	The role ID contains invalid characters.

A ECMAScript Core Reference

This section provides details on using the ECMA Expression Builder.

- ♦ [Section A.1, “ECMAScript Operators,” on page 415](#)
- ♦ [Section A.2, “Functions/Methods,” on page 418](#)
- ♦ [Section A.3, “DOM Methods,” on page 418](#)
- ♦ [Section A.4, “ECMAScript Core,” on page 443](#)

A.1 ECMAScript Operators

The following tables provide descriptions of the operators supported by the ECMA Expression Builder.

- ♦ [Table A-1, “Math,” on page 415](#)
- ♦ [Table A-2, “Assignment,” on page 415](#)
- ♦ [Table A-3, “Other,” on page 416](#)
- ♦ [Table A-4, “Relational,” on page 417](#)
- ♦ [Table A-5, “Logical,” on page 417](#)
- ♦ [Table A-6, “String,” on page 417](#)

Table A-1 *Math*

Operator	Description
+ Add	Returns the sum of two numerical values (either literals or variables).
- Subtract	Subtracts one number from another.
* Multiply	Returns the product of two numerical values (either literals or variables).
/ Divide	Divides one number by another.

Table A-2 *Assignment*

Operator	Description
= Assignment	Assigns the value of the right operand to the left operand.

Operator	Description
<code>+=</code> Add to this	Adds the left and right operands and assigns the result to the left operand. For example, <code>a += b</code> is the same as <code>a = a + b</code> .
<code>-=</code> Subtract from this	Subtracts the right operand from the left operand and assigns the result to the left operand. For example, <code>a -= b</code> is the same as <code>a = a - b</code> .
<code>*=</code> Multiply to this	Multiplies the two operands and assigns the result to the left operand. For example, <code>a *= b</code> is the same as <code>a = a * b</code> .
<code>/=</code> Divide this to	Divides the left operand by the right operand and assigns the result to the left operand. For example, <code>a /= b</code> is the same as <code>a = a / b</code> .
<code>%=</code> Modulus	Divides the left operand by the right operand and assigns the remainder to the left operand. For example, <code>a %= b</code> is the same as <code>a = a % b</code> .
<code>&=</code> Apply bitwise AND to this	Performs bitwise AND on operands and assigns the result to the left operand. For example, <code>a &= b</code> is the same as <code>a = a & b</code> .
<code> =</code> Apply bitwise OR to this	Performs bitwise OR on operands and assigns the result to the left operand. For example, <code>a = b</code> is the same as <code>a = a b</code> .
<code><<=</code> Apply bitwise left shift to this	Performs bitwise left shift on operands and assigns the result to the left operand. For example, <code>a <<= b</code> is the same as <code>a = a << b</code> .
<code>>>=</code> Apply bitwise signed right shift to this	Performs bitwise right shift on operands and assigns the result to the left operand. For example, <code>a >>= b</code> is the same as <code>a = a >> b</code> .
<code>>>>=</code> Apply bitwise unsigned right shift to this	Performs bitwise unsigned right shift on operands and assigns the result to the left operand. For example, <code>a >>>= b</code> is the same as <code>a = a >>> b</code> .

Table A-3 *Other*

Operator	Description
<code>%</code> Modulus	Divides the left operand by the right operand and returns the integer remainder.
<code>++</code> Autoincrement	Increments the operand by one (can be used before or after the operand).
<code>--</code> Autodecrement	Decrements the operand by one (can be used before or after the operand).
<code>~</code> Bitwise NOT	Inverts the bits of its operand.
<code>&</code> Bitwise AND	Returns a 1 in each bit position for which the corresponding bits of both operands are ones.
<code> </code> Bitwise OR	Returns a 1 in each bit position for which the corresponding bits of either or both operands are ones.
<code>^</code> Bitwise XOR	Returns a 1 in each bit position for which the corresponding bits of either but not both operands are ones.

Operator	Description
<< Bitwise left shift	Shifts the digits of the binary representation of the first operand to the left by the number of places specified by the second operand. The spaces created to the right are filled in by zeros, and any digits shifted to the left are discarded.
>> Signed bitwise right shift	Shifts the digits of the binary representation of the first operand to the right by the number of places specified by the second operand, discarding any digits shifted to the right. The copies of the leftmost bit are added on from the left, preserving the sign of the number.
>>> Unsigned bitwise right shift	Shifts the binary representation of the first operand to the right by the number of places specified by the second operand. Bits shifted to the right are discarded and zeroes are added to the left.

Table A-4 *Relational*

Operator	Description
== Equal	Assigns the value of the right operand to the left operand.
!= Not Equal	Returns a Boolean True if the operands are not equal.
< Less than	Returns True if the left operand is less than the right operand.
> Greater than	Returns True if the left operand is greater than the right operand.
<= Less than or equal	Returns True if the left operand is less than or equal to the right operand.
>= Greater than or equal	Returns True if the left operand is greater than or equal to the right operand.

Table A-5 *Logical*

Operator	Description
&& AND	Returns a Boolean true if both operands are true; otherwise, returns False.
OR	Returns True if either operand is true. Returns false when both operands are False.
! NOT	Returns False if its single operand can be converted to true (or if it is a non-Boolean value). Returns True if its operand can be converted to False.

Table A-6 *String*

Operator	Description
+ Concatenate	Concatenates two string operands, returning a string that is the union of the two operand strings.

A.2 Functions/Methods

For a description of the functions and methods available in the ECMA Expression Builder, see [Section 9.3, “User Application API,” on page 325](#).

A.3 DOM Methods

This section lists all DOM-related methods and properties supported by the ECMA Expression Builder, including not only DOM-1 and DOM-2 extensions (defined by the relevant W3C standards), but also Designer’s own ECMAScript extensions. Extension methods are specifically noted as such in the text. DOM methods are displayed in the ECMA Expression Builder when you are working with expressions in the Integration activity.

This section includes the following topics:

- ♦ [Section A.3.1, “Node,” on page 418](#)
- ♦ [Section A.3.2, “Document,” on page 423](#)
- ♦ [Section A.3.3, “Element,” on page 428](#)
- ♦ [Section A.3.4, “Attribute,” on page 434](#)
- ♦ [Section A.3.5, “CharacterData,” on page 435](#)
- ♦ [Section A.3.6, “NodeList,” on page 436](#)
- ♦ [Section A.3.7, “NamedNodeMap,” on page 438](#)
- ♦ [Section A.3.8, “Text,” on page 440](#)
- ♦ [Section A.3.9, “DocumentType,” on page 440](#)
- ♦ [Section A.3.10, “DOMImplementation,” on page 441](#)
- ♦ [Section A.3.11, “Notation,” on page 442](#)
- ♦ [Section A.3.12, “Entity,” on page 443](#)
- ♦ [Section A.3.13, “ProcessingInstruction,” on page 443](#)

A.3.1 Node

Lets you work with nodes. This section includes the following topics:

- ♦ [“attributes” on page 419](#)
- ♦ [“childNodes” on page 419](#)
- ♦ [“firstChild” on page 419](#)
- ♦ [“lastChild” on page 419](#)
- ♦ [“nextSibling” on page 419](#)
- ♦ [“nodeName” on page 419](#)
- ♦ [“nodeType” on page 420](#)
- ♦ [“nodeValue” on page 420](#)
- ♦ [“ownerDocument” on page 420](#)
- ♦ [“parentNode” on page 420](#)

- ♦ “previousSibling” on page 420
- ♦ “XML” on page 420
- ♦ “appendChild(newChild)” on page 420
- ♦ “cloneNode(deep)” on page 420
- ♦ “createXPath(XPathType asPattern)” on page 421
- ♦ “hasChildNodes()” on page 421
- ♦ “insertBefore(newChild, refChild)” on page 421
- ♦ “removeChild(oldChild)” on page 421
- ♦ “replaceChild(newChild, oldChild)” on page 421
- ♦ “getXML()” on page 421
- ♦ “ownerDocument” on page 421
- ♦ “namespaceURI” on page 422
- ♦ “prefix” on page 422
- ♦ “localName” on page 422
- ♦ “normalize()” on page 422
- ♦ “hasAttributes()” on page 422
- ♦ “isSupported(feature, version)” on page 422

attributes

W3C DOM Level 1 Node property. This property returns a NamedNodeMap object of the attributes for the Node.

childNodes

W3C DOM Level 1 Node property. This property returns a NodeList object consisting of the immediate children of the Node.

firstChild

W3C DOM Level 1 Node property. This property returns the first child node of a Node object.

lastChild

W3C DOM Level 1 Node property. This property returns the last child node of a Node object.

nextSibling

W3C DOM Level 1 Node property. This property returns the next sibling node for a Node object.

nodeName

W3C DOM Level 1 Node property. This property returns the node name as a String object.

nodeType

W3C DOM Level 1 Node property. This property returns the node type as a short in with one of the following values:

- 1 = Element
- 2 = Attribute
- 3 = Text
- 4 = CDATASection
- 5 = EntityReference
- 6 = Entity
- 7 = ProcessingInstruction
- 8 = Comment
- 9 = Document
- 10 = DocumentType
- 11 = DocumentFragment
- 12 = Notation

nodeValue

W3C DOM Level 1 Node property. This property returns the node text data as a String.

ownerDocument

W3C DOM Level 1 Node property. This property returns a Document object.

parentNode

W3C DOM Level 1 Node property. This property returns the parent node object for a Node object.

previousSibling

W3C DOM Level 1 Node property. This property returns the previous sibling node for a Node object.

XML

Designer extension property. This property returns a string representing the DOM. Useful in Log actions for debugging components (for example, Input.XML).

appendChild(newChild)

Node `appendChild(newChild)`

W3C DOM Level 1 Node method. Appends a node as the last child for a Node. The `newChild` parameter is of type Node.

cloneNode(deep)

Node `cloneNode(deep)`

W3C DOM Level 1 Node method. Creates an unattached Node object. The deep parameter is of type Boolean.

createXPath(XPathType asPattern)

Object createXPath(XPathType asPattern)

ECMAScript extension method. Creates the XPath pattern. The XPath Type asPattern parameter supports only abbreviated XPath notation and explicit ordinals. XPath functions are not supported.

hasChildNodes()

boolean hasChildNodes()

W3C DOM Level 1 Node method. Returns a Boolean indicating whether the node has children.

insertBefore(newChild, refChild)

Node insertBefore(newChild, refChild)

W3C DOM Level 1 Node method. Inserts a node object into the parent node before the refChild node. The newChild parameter is of type Node. The refChild parameter is of type Node.

removeChild(oldChild)

Node removeChild(oldChild)

W3C DOM Level 1 Node method. Removes a node from a parent and returns an unattached node. The oldChild parameter is of type Node.

replaceChild(newChild, oldChild)

Node replaceChild(newChild, oldChild)

W3C DOM Level 1 Node method. Replaces one node with another node. The newChild parameter is of type Node. The oldChild parameter is of type Node.

getXML()

String getXML()

ECMAScript extension method. This property returns a string representing the DOM. Useful in Log actions for debugging components. Example:

```
Input.XPath("root/child").getXML()
```

ownerDocument

W3C DOM Level 2 modified Node property. Returns the Document object associated with this node. This is also the Document object used to create new nodes. Example:

```
someNodeObject.ownerDocument
```

namespaceURI

W3C DOM Level 2 Node property. Returns the namespace URI of this node, or null if the namespace URI is not specified. Example:

```
someNodeObject.namespaceURI
```

prefix

W3C DOM Level 2 Node property. Returns the namespace prefix of this node, or null if the namespace prefix is not specified. Example:

```
someNodeObject.prefix
```

localName

W3C DOM Level 2 Node property. Returns the local part of the qualified name of this node. Example:

```
someNodeObject.localName
```

normalize()

```
void normalize()
```

W3C DOM Level 2 modified Node method. Puts all Text nodes in the full depth of the subtree underneath this Node, including attribute nodes, into a “normal” form in which only structure separates Text nodes, (for example, elements, comments, processing instructions, CDATA sections, and entity references). In other words, there are neither adjacent Text nodes nor empty Text nodes.

hasAttributes()

```
boolean hasAttributes()
```

W3C DOM Level 2 Node method. Returns True if the node has any attributes; otherwise, returns False. Example:

```
Temp.XPath("A/B/C").item(0).hasAttributes()
```

isSupported(feature, version)

```
boolean isSupported(feature, version)
```

W3C DOM Level 2 Node method. Returns True if the specified feature is supported on this node; otherwise, returns False.

Table A-7 Parameters of the `IsSupported` Method

Parameter	Features
feature	Core XML HTML Views Stylesheets CSS CSS2 Events UIEvents MouseEvents MutationEvents HTMLEvents Range Transversal
version	Specifies the version number of the feature to test. In Level 2, version 1, this is the string "2.0". If the version is not specified, supporting any version of the feature causes the method to return True.

Example:

```
aNodeObject.isSupported("Core", "2.0")
```

A.3.2 Document

Lets you work with documents. This section includes the following topics:

- ♦ [“doctype” on page 424](#)
- ♦ [“documentElement” on page 424](#)
- ♦ [“implementation” on page 424](#)
- ♦ [“text” on page 424](#)
- ♦ [“createAttribute\(name\)” on page 424](#)
- ♦ [“createCDATASection\(data\)” on page 424](#)
- ♦ [“createComment\(data\)” on page 424](#)
- ♦ [“createDocumentFragment\(\)” on page 425](#)
- ♦ [“createElement\(tagName\)” on page 425](#)
- ♦ [“createEntityReference\(name\)” on page 425](#)
- ♦ [“createProcessingInstruction\(target,data\)” on page 425](#)
- ♦ [“createTextNode\(data\)” on page 425](#)
- ♦ [“getElementsByTagName\(tagName\)” on page 425](#)
- ♦ [“reset\(\)” on page 425](#)
- ♦ [“setDTD\(Node RootElementName, Object PublicName, Object URL\)” on page 425](#)
- ♦ [“setValue\(Object aValue\)” on page 426](#)
- ♦ [“toString\(\)” on page 426](#)

- “XPath(String asPattern)” on page 426
- “importNode(sourceNode, deep)” on page 426
- “createElementNS(namespaceURI, qualifiedName)” on page 426
- “createAttributeNS(namespaceURI, qualifiedName)” on page 427
- “getElementsByTagNameNS(namespaceURI, localName)” on page 427
- “getElementById(elementId)” on page 428
- “setSkipNameSpaces(abFlag)” on page 428
- “setEncoding(encoding)” on page 428

doctype

W3C DOM Level 1 Document property. This property returns a `DocumentType` object reflecting the DTD for the document. A `Document` also has all the properties and methods of `Node`.

documentElement

W3C DOM Level 1 Document property. This property returns an `Element` object (the root element). A `Document` also has all the properties and methods of `Node`.

implementation

W3C DOM Level 1 Document property. This property returns a `DOMImplementation` object. A `Document` also has all the properties and methods of `Node`.

text

Designer extension property. This property returns a concatenated string of all the text nodes (content) under it.

createAttribute(name)

```
Attr createAttribute(name)
```

W3C DOM Level 1 Document method. Returns an unattached `Attr` object. The `name` parameter is of type `String`. A `Document` also has all the properties and methods of `Node`.

createCDATASection(data)

```
CDATASection createCDATASection(data)
```

W3C DOM Level 1 Document method. Returns an unattached `CDATASection` object. The `data` parameter is of type `String`. A `Document` also has all the properties and methods of `Node`.

createComment(data)

```
Comment createComment(data)
```

W3C DOM Level 1 Document method. Returns an unattached `Comment` object. The `data` parameter is of type `String`. A `Document` also has all the properties and methods of `Node`.

createDocumentFragment()

`DocumentFragment createDocumentFragment()`

W3C DOM Level 1 Document method. Returns an unattached DocumentFragment. A Document also has all the properties and methods of Node.

createElement(tagName)

`Element createElement(tagName)`

W3C DOM Level 1 Document method. Creates an unattached Element. The `tagName` parameter is of type String. A Document also has all the properties and methods of Node.

createEntityReference(name)

`EntityReference createEntityReference(name)`

W3C DOM Level 1 Document method. Creates an unattached EntityReference. The `name` parameter is of type String. A Document also has all the properties and methods of Node.

createProcessingInstruction(target,data)

`ProcessingInstruction createProcessingInstruction(target,data)`

W3C DOM Level 1 Document method. Returns an unattached ProcessingInstruction object. The `target` and `data` parameters are of type String. A Document also has all the properties and methods of Node.

createTextNode(data)

`Text createTextNode(data)`

W3C DOM Level 1 Document method. Creates an unattached Text object. The `data` parameter is of type String. A Document also has all the properties and methods of Node.

getElementsByTagName(tagName)

`NodeList getElementsByTagName(tagName)`

W3C DOM Level 1 Document method. Returns a NodeList object consisting of the tagname element nodes. The `tagName` parameter is of type String. A Document also has all the properties and methods of Node.

reset()

`void reset()`

W3C DOM Level 1 Document method. Clears the document.

setDTD(Node RootElementName, Object PublicName, Object URL)

`setDTD(Node RootElementName, Object PublicName, Object URL)`

ECMAScript extension method. Sets the DTD file for the document.

setValue(Object aValue)

```
setValue(Object aValue)
```

ECMAScript extension method. Sets the Value of a document from the passed objects. If the passed object is another document, then it copies child nodes (elements and attributes). If the passed object is text, the text is parsed to create a DOM.

toString()

```
String toString()
```

ECMAScript extension method. Converts a DOM document to an XML formatted string.

Example:

```
Input.XPath("root/child").item(0).toString()
```

XPath(String asPattern)

```
NodeList XPath(XPathType asPattern)
```

ECMAScript extension method. XPathTypes can be of type NodeList, String, Number, or Boolean. Usually used to return a Nodelist matching the XPath pattern. Use brackets to select a particular node from the list. For example, `Input.XPath("INVOICE/LINEITEM[1]")` or `Input.XPath("INVOICE/LINEITEM[last()]")`. Use the `@` symbol to select a node by attribute. For example, `Input.XPath("INVOICE/LINEITEM[@myattr]")` To select by attribute value: `Input.XPath("INVOICE/LINEITEM[@myattr='abc']")`.

importNode(sourceNode, deep)

```
Node importNode(sourceNode, deep)
```

W3C DOM Level 2 Document method. Imports a node from a document to the current document. Creates a new copy of the sourceNode. The sourceNode is not altered. A Document also has all the properties and methods of Node.

Table A-8 Parameters for the ImportNode Method

Parameter	Description
sourceNode	The node to import.
deep	A Boolean. If True, recursively import the subtree under the specified node. If False, import only the node itself.

Example:

```
Temp.importNode(Input.XPath("A/B[2]"), false)
```

createElementNS(namespaceURI, qualifiedName)

```
Element createElementNS(namespaceURI, qualifiedName)
```

W3C DOM Level 2 Document method. Creates an Element of the given qualifiedName and namespaceURI. A Document also has all the properties and methods of Node.

Table A-9 Parameters for the createElementNS Method

Parameter	Description
namespaceURI	A string representing the namespace URI that you want to create for the element.
qualifiedName	A string representing the name to create for the element. qualifiedName = namespaceprefix + : + localName

Example:

```
Temp.createElementNS("someURI", "namespace:PRICE")
```

createAttributeNS(namespaceURI, qualifiedName)

```
Attr createAttributeNS(namespaceURI, qualifiedName)
```

W3C DOM Level 2 Document method. Creates an Attribute of the given qualifiedName and namespaceURI. A Document also has all the properties and methods of Node.

Table A-10 Parameters for the createAttributeNS Method

Parameter	Description
namespaceURI	A string representing the namespace URI that you want to create for the attribute.
qualifiedName	A string representing the name to create for the attribute. qualifiedName = namespaceprefix + : + localName

Example:

```
Temp.createAttributeNS("someURI", "namespace:PRICE")
```

getElementsByTagNameNS(namespaceURI, localName)

```
NodeList getElementsByTagNameNS(namespaceURI, localName)
```

W3C DOM Level 2 Document method. Returns a NodeList of all the Elements with a given localName and namespace URI, in the order in which they are encountered in a preorder traversal of the Document tree. A Document also has all the properties and methods of Node.

Table A-11 Parameters for the getElementsByTagNameNS Method

Parameter	Description
namespaceURI	A string of the elements on which to match. The special value "*" matches all namespaces.
qualifiedName	A string of the elements on which to match. The special value "*" matches all local names.

Example:

```
Temp.getElementsByTagNameNS("someURI", "someName")
```

getElementById(elementId)

Element getElementById(elementId)

W3C DOM Level 2 Document method. Returns the Element for which the ID is given by elementId. If no such element exists, returns null. Behavior is not defined if more than one element has this ID. A Document also has all the properties and methods of Node.

Example;

```
Temp.getElementById("someId")
```

setSkipNameSpaces(abFlag)

void setSkipNameSpaces(boolean flag)

Can be used to turn off usage of namespaces and match nodes without any prefixes, behaving like a wildcard match.

setEncoding(encoding)

void setEncoding(String encoding)

Sets the character set encoding for the document.

A.3.3 Element

Lets you work with elements. This section includes the following topics:

- ♦ [“tagName” on page 429](#)
- ♦ [“text” on page 429](#)
- ♦ [“booleanValue\(\)” on page 429](#)
- ♦ [“countOfElement\(String propertyName\)” on page 429](#)
- ♦ [“doubleValue\(\)” on page 429](#)
- ♦ [“exists\(String propertyName\)” on page 429](#)
- ♦ [“getAttribute\(name\)” on page 429](#)
- ♦ [“getAttributeNode\(name\)” on page 430](#)
- ♦ [“getElementsByTagName\(name\)” on page 430](#)
- ♦ [“getIndex\(\)” on page 430](#)
- ♦ [“getParent\(\)” on page 430](#)
- ♦ [“normalize\(\)” on page 430](#)
- ♦ [“removeAttribute\(name\)” on page 430](#)
- ♦ [“removeAttributeNode\(oldAttr\)” on page 430](#)
- ♦ [“setAttribute\(name,value\)” on page 430](#)
- ♦ [“setAttributeNode\(newAttr\)” on page 431](#)
- ♦ [“setIndex\(int aiIndex\)” on page 431](#)
- ♦ [“setText\(String asText\)” on page 431](#)
- ♦ [“setValue\(Object aValue\)” on page 431](#)
- ♦ [“toNumber\(\)” on page 431](#)

- ♦ [“toString\(\)” on page 431](#)
- ♦ [“XPath\(XPathType asPattern\)” on page 431](#)
- ♦ [“getAttributeNS\(namespaceURI, localName\)” on page 431](#)
- ♦ [“setAttributeNS\(namespaceURI, qualifiedName, value\)” on page 432](#)
- ♦ [“removeAttributeNS\(namespaceURI, localName\)” on page 432](#)
- ♦ [“getAttributeNodeNS\(namespaceURI, localName\)” on page 433](#)
- ♦ [“setAttributeNodeNS\(newAttr\)” on page 433](#)
- ♦ [“getElementsByTagNameNS\(namespaceURI, localName\)” on page 433](#)
- ♦ [“hasAttribute\(name\)” on page 434](#)
- ♦ [“hasAttributeNS\(namespaceURI, localName\)” on page 434](#)

tagName

W3C DOM Level 1 Element property. This property returns a String object containing the element name. An Element also has all the properties and methods of Node.

text

Designer extension property. This property returns the concatenated text of all the text nodes under it.

booleanValue()

`boolean booleanValue()`

ECMAScript extension method. Returns the Boolean value (True or False) of this object, if possible.

countOfElement(String propertyName)

`Number countOfElement(String propertyName)`

ECMAScript extension method. Returns a count of the named child.

doubleValue()

`double doubleValue()`

ECMAScript extension method. Returns a double value for this object if possible.

exists(String propertyName)

`Boolean exists(String propertyName)`

ECMAScript extension method. Checks for the existence of the named child.

getAttribute(name)

`String getAttribute(name)`

W3C DOM Level 1 Element method. Returns a String consisting of the attribute value. The name parameter is of type String. An Element also has all the properties and methods of Node.

getAttributeNode(name)

`Attr getAttributeNode(name)`

W3C DOM Level 1 Element method. Returns an `Attr`. The name parameter is of type `String`. An `Element` also has all the properties and methods of `Node`.

getElementsByTagName(name)

`NodeList getElementsByTagName(name)`

W3C DOM Level 1 Element method. Returns a `NodeList` of all elements with a specified name. The name parameter is of type `String`. An `Element` also has all the properties and methods of `Node`.

getIndex()

`int getIndex()`

ECMAScript extension method. Returns the current index.

getParent()

`Node getParent()`

ECMAScript extension method. Returns the parent element.

normalize()

`void normalize()`

W3C DOM Level 1 Element method. Returns a `void`. An `Element` also has all the properties and methods of `Node`.

removeAttribute(name)

`void removeAttribute(name)`

W3C DOM Level 1 Element method. Removes an attribute from an element. The name parameter is of type `String`. An `Element` also has all the properties and methods of `Node`.

removeAttributeNode(oldAttr)

`Attr removeAttributeNode(oldAttr)`

W3C DOM Level 1 Element method. Removes an attribute from an element and returns an unattached `Attr`. The `oldAttr` parameter is of type `Attr`. An `Element` also has all the properties and methods of `Node`.

setAttribute(name,value)

`void setAttribute(name, value)`

W3C DOM Level 1 Element method. Sets the value of an attribute node for an element. The name parameter is of type `String`. The value parameter is of type `String`. An `Element` also has all the properties and methods of `Node`.

setAttributeNode(newAttr)

`Attr setAttributeNode(newAttr)`

W3C DOM Level 1 Element method. Attaches an attribute node to an element. The `newAttr` parameter is of type `Attr`. An `Element` also has all the properties and methods of `Node`.

setIndex(int aiIndex)

`setIndex(int aiIndex)`

ECMAScript extension method. Sets the iterator index value for this element.

setText(String asText)

`setText(String asText)`

ECMAScript extension method. Sets the text node associated with this element.

setValue(Object aValue)

`setValue(Object aValue)`

ECMAScript extension method. Sets the value of an element from the passed object. If the passed object is another element, then it also copies child nodes (elements and attributes).

toNumber()

`Number toNumber()`

ECMAScript extension method. Gets the text node and converts it to a number.

toString()

`String toString()`

ECMAScript extension method. Gets the text node associated with this element.

XPath(XPathType asPattern)

`NodeList XPath(XPathType asPattern)`

ECMAScript extension method. The `XPathType` parameter can be of type `NodeList`, `String`, `Number`, or `Boolean`. Usually used to return a `NodeList` matching the XPath pattern. Use brackets to select a particular node from the list. For example, `Input.XPath("INVOICE/LINEITEM[1]")` or `Input.XPath("INVOICE/LINEITEM[last()]")`. Use the `@` symbol to select a node by attribute. For example, `Input.XPath("INVOICE/LINEITEM[@myattr]")`. To select by attribute value: `Input.XPath("INVOICE/LINEITEM[@myattr='abc']")`.

getAttributeNS(namespaceURI, localName)

`string getAttributeNS(namespaceURI, localName)`

W3C DOM Level 2 Element method. Returns the `Attr` value as a string. An `Element` also has all the properties and methods of `Node`.

Table A-12 Parameters for the `getAttributeNS` Method

Parameter	Description
<code>namespaceURI</code>	Specifies a string representing the namespace URI of the target Attr.
<code>localName</code>	Specifies a string of the localName of the target Attr.

Example:

```
Temp.XPath("A/B[0]").getAttributeNS("someURI", "someAttr")
```

setAttributeNS(namespaceURI, qualifiedName, value)

```
void setAttributeNS(namespaceURI, qualifiedName, value)
```

W3C DOM Level 2 Element method. Adds a new attribute. If an attribute with the same namespaceURI and localName is already present in the element, its prefix is changed to be the prefix part of the qualifiedName parameter, and its value is changed to be the value parameter. An Element also has all the properties and methods of Node.

Table A-13 Parameters for the `setAttributeNS` Method

Parameter	Description
<code>namespaceURI</code>	The namespace URI of the attribute to create or alter.
<code>qualifiedName</code>	Specifies the qualified name of the attribute to create or alter. TIP: qualifiedName = namespaceprefix + : + localName
<code>value</code>	Specifies the value to set in string form.

Example:

```
Temp.XPath("A/B[0]").setAttributeNS("someURI", "someAttrName", "someAttrvalue")
```

removeAttributeNS(namespaceURI, localName)

```
void removeAttributeNS(namespaceURI, localName)
```

W3C DOM Level 2 Element method. Removes an attribute by local name and namespace URI. If the removed attribute has a default value, it is immediately replaced. The replacing attribute has the same namespace URI and local name, as well as the original prefix. An Element also has all the properties and methods of Node.

Table A-14 Parameters for the `removeAttributeNS` Method

Parameter	Description
<code>namespaceURI</code>	Specifies the namespaceURI of the attribute to remove.
<code>localName</code>	Specifies the name of the attribute to remove.

Example:

```
Temp.XPath("A/B[0]").removeAttributeNS("someURI", "someAttrName")
```


getAttributeNodeNS(namespaceURI, localName)

Attr getAttributeNodeNS(namespaceURI, localName)

W3C DOM Level 2 Element method. Retrieves an attribute node by local name and namespace URI. An Element also has all the properties and methods of Node.

Table A-15 Parameters for the getAttributeNodeNS Method

Parameter	Description
namespaceURI	Specifies the namespaceURI of the attribute to retrieve.
localName	Specifies the name of the attribute to retrieve.

Example:

```
Temp.XPath("A/B[0]").getAttributeNodeNS("someURI", "someAttr")
```

setAttributeNodeNS(newAttr)

Attr setAttributeNodeNS(newAttr)

W3C DOM Level 2 Element method. Adds a new attribute. If an attribute with the same local name and namespace URI is already present in the element, it is replaced by the new attribute. If the newAttr attribute replaces an existing attribute with the same local name and namespace URI, the replaced Attr node is returned, otherwise null is returned. The newAttr parameter is a new attribute object. An Element also has all the properties and methods of Node.

Example:

```
Temp.XPath("A/B[0]").setAttributeNodeNS(newAttr)
```

getElementsByTagNameNS(namespaceURI, localName)

NodeList getElementsByTagNameNS(namespaceURI, localName)

W3C DOM Level 2 Element method. Returns a NodeList of all the descendant Elements with a given local name and namespace URI in the order in which they are encountered in a preorder traversal of this Element tree. An Element also has all the properties and methods of Node.

Table A-16 Parameters for the getElementsByTagNameNS Method

Parameter	Description
namespaceURI	Specifies the namespaceURI of the elements on which to match. The special value "*" matches all namespaces.
localName	Specifies the localName of the elements on which to match. The special value "*" matches all local names.

Example:

```
Temp.XPath("A/B[0]").getElementsByTagNameNS("someURI", "someName")
```

hasAttribute(name)

boolean hasAttribute()

W3C DOM Level 2 Element method. Returns True when an attribute with a given name is specified for this element or has a default value. Otherwise, returns False. The parameter name is a string that specifies the attribute name for which to look. An Element also has all the properties and methods of Node.

Example:

```
Temp.XPath("A/B[0]").hasAttribute("someName")
```

hasAttributeNS(namespaceURI, localName)

boolean hasAttributeNS(namespaceURI, localName)

W3C DOM Level 2 Element method. Returns True when an attribute with a given local name and namespace URI is specified on this element or has a default value. Otherwise, returns False. An Element also has all the properties and methods of Node.

Table A-17 Parameters for the hasAttributeNS Method

Parameter	Description
namespaceURI	Specifies the namespaceURI of the attribute for which to look.
localName	Specifies the localName of the attribute for which to look.

Example:

```
Temp.XPath("A/B[0]").hasAttributeNS("someURI", "someName")
```

A.3.4 Attribute

Lets you work with attributes. This section includes the following topics:

- ♦ [“name” on page 434](#)
- ♦ [“specified” on page 435](#)
- ♦ [“text” on page 435](#)
- ♦ [“value” on page 435](#)
- ♦ [“setValue\(Object aValue\)” on page 435](#)
- ♦ [“toString\(\)” on page 435](#)
- ♦ [“ownerElement” on page 435](#)

name

W3C DOM Level 1 attribute property. This property returns a String object indicating the tag name of the attribute. An attribute also has all the properties and methods of Node.

specified

W3C DOM Level 1 Attr property. This property returns a Boolean. An attribute also has all the properties and methods of Node.

text

Designer extension property. This property returns the text value of the attribute.

value

W3C DOM Level 1 Attr property. This property returns a String object representing the text value of the attribute. An attribute also has all the properties and methods of Node.

setValue(Object aValue)

```
setValue(Object aValue)
```

Designer extension method. Sets the value of an attribute from the passed object.

toString()

```
String toString()
```

ECMAScript extension method. Gets the text node associated with the attribute.

ownerElement

W3C DOM Level 2 Attr property. Returns the Element node to which this attribute is attached. Returns null if this attribute is not in use. An Attr also has all the properties and methods of Node.

Example:

```
attributeObject.ownerElement
```

A.3.5 CharacterData

Lets you work with character data. This section includes the following topics:

- ♦ [“data” on page 435](#)
- ♦ [“length” on page 436](#)
- ♦ [“appendData\(arg\)” on page 436](#)
- ♦ [“insertData\(offset, arg\)” on page 436](#)
- ♦ [“deleteData\(offset, count\)” on page 436](#)
- ♦ [“replaceData\(offset, count, arg\)” on page 436](#)
- ♦ [“substringData\(offset, count\)” on page 436](#)

data

W3C DOM Level 1 CharacterData property. This property is of type String and represents the contents of the CharacterData object. CharacterData also has all the properties and methods of Node.

length

W3C DOM Level 1 CharacterData property. This property represents the length of the CharacterData object. CharacterData also has all the properties and methods of Node.

appendData(arg)

```
void appendData(arg)
```

W3C DOM Level 1 CharacterData method. Appends text to the CharacterData object. The arg parameter is of type String. CharacterData also has all the properties and methods of Node.

insertData(offset, arg)

```
void insertData(offset, arg)
```

W3C DOM Level 1 CharacterData method. Inserts text in the CharacterData object. The offset parameter is of type unsigned long. The arg parameter is of type String. CharacterData also has all the properties and methods of Node.

deleteData(offset, count)

```
void deleteData(offset, count)
```

W3C DOM Level 1 CharacterData method. Deletes text in the CharacterData object. The offset and count parameters are of type unsigned long. CharacterData also has all the properties and methods of Node.

replaceData(offset, count, arg)

```
void replaceData(offset, count, arg)
```

W3C DOM Level 1 CharacterData method. Replaces text in the CharacterData object. The offset and count parameters are of type unsigned long. The arg parameter is of type String. CharacterData also has all the properties and methods of Node.

substringData(offset, count)

```
String substringData(offset, count)
```

W3C DOM Level 1 CharacterData method. Returns a substring of the CharacterData object. The offset and count parameters are of type unsigned long. CharacterData also has all the properties and methods of Node.

A.3.6 NodeList

Lets you work with node lists. This section includes the following topics:

- ♦ [“length” on page 437](#)
- ♦ [“avg\('\[NodeList\]’\)” on page 437](#)
- ♦ [“count\('\[NodeList\]’\)” on page 437](#)
- ♦ [“item\(index\)” on page 437](#)
- ♦ [“min\('\[NodeList\]’\)” on page 437](#)

- ♦ [“max\(\['NodeList'\]\)” on page 438](#)
- ♦ [“sum\(\['NodeList'\]\)” on page 438](#)
- ♦ [“where\(XPathType asPattern\)” on page 438](#)
- ♦ [“toNumber\(\)” on page 438](#)

length

W3C DOM Level 1 `NodeList` property. This property returns the number of nodes in a `NodeList` object.

avg(['NodeList'])

```
Number avg(' [NodeList]')
```

ECMAScript aggregate extension method. Returns a number equal to the average value in the `NodeList`. The `NodeList` parameter is of type `XPath`. If no parameter is supplied, then the current `NodeList/GroupName` is used. The function argument should be in single quotes, and must be escaped for nested calls.

Example:

```
Input.XPath("rootElem/childElem").avg()
```

count(['NodeList'])

```
Number count(' [NodeList]')
```

ECMAScript aggregate extension method. Returns a number equal to a count of the nodes in the `NodeList` that have data. Nodes without data, or nodes with only child elements are not counted. To count all nodes, use the `.length` property on a `nodeList` object. The optional `NodeList` parameter is of type `XPath`. If no parameter is supplied (the usual case), then the current `NodeList/GroupName` is used. The function argument should be in single quotes, and must be escaped for nested calls.

Example:

```
Input.XPath("rootElem/childElem").count()
```

item(index)

```
Node item(index)
```

W3C DOM Level 1 `NodeList` method. Returns the indicated `Node` from the `NodeList`. The index parameter is of type unsigned long. The Index is 0-based.

min(['NodeList'])

```
Number min(' [NodeList]')
```

ECMAScript aggregate extension method. Returns a number equal to the lowest value in the `NodeList`. The `NodeList` parameter is of type `XPath`. If no parameter is supplied, then the current `NodeList/GroupName` is used. The function argument should be in single quotes, and must be escaped for nested calls.

Example:

```
Input.XPath("rootElem/childElem").min()
```

max(['NodeList'])

Number max(['NodeList'])

ECMAScript aggregate extension method. Returns a number equal to the highest value in the NodeList. The NodeList parameter is of type XPath. If no parameter is supplied, then the current NodeList/GroupName is used. The function argument should be in single quotes, and must be escaped for nested calls.

Example:

```
Input.XPath("rootElem/childElem").max()
```

sum(['NodeList'])

Number sum(['NodeList'])

ECMAScript aggregate extension method. Returns a number equal to the sum of the values in NodeList. The NodeList parameter is of type XPath. If no parameter is supplied, then the current NodeList/GroupName is used. The function argument should be in single quotes, and must be escaped for nested calls.

Example:

```
Input.XPath("rootElem/childElem").sum()
```

where(XPathType asPattern)

NodeList where(String asPattern)

ECMAScript extension method. Gets a NodeList of nodes matching the XPath pattern.

toNumber()

toNumber()

Converts the data of the first instance in the NodeList to an ECMAScript Number object. Any alphabetic characters or embedded spaces in data return NaN. Leading and trailing spaces are permitted.

Example:

```
var myNum = Input.XPath("Invoice/Amount").toNumber()
```

A.3.7 NamedNodeMap

Lets you work with named node maps. This section includes the following topics:

- ♦ [“length” on page 439](#)
- ♦ [“getNamedItem\(name\)” on page 439](#)
- ♦ [“getNamedItemNS\(namespaceURI, localName\)” on page 439](#)
- ♦ [“item\(index\)” on page 439](#)
- ♦ [“removeNamedItem\(name\)” on page 439](#)
- ♦ [“removeNamedItemNS\(namespaceURI, localName\)” on page 439](#)

- ♦ [“setNamedItem\(arg\)” on page 440](#)
- ♦ [“setNamedItemNS\(Node arg\)” on page 440](#)

length

length W3C DOM Level 1 NamedNodeMap property. This property returns the number of nodes in a NamedNodeMap.

getNamedItem(name)

Node getNamedItem(name)

W3C DOM Level 1 NamedNodeMap method. Returns all selected Nodes of the indicated name. The name parameter is of type String.

getNamedItemNS(namespaceURI, localName)

Node getNamedItemNS(namespaceURI, localName)

W3C DOM Level 2 NamedNodeMap method. Returns a node specified by local name and namespace URI.

Table A-18 Parameters for the NamedNodeMap Method

Parameter	Description
namespaceURI	Specifies the namespaceURI of the node to retrieve.
localName	Specifies the localName of the node to retrieve.

Example:

```
Temp.XPath("A/B").item(0).getAttributes().getNamedItemNS("someURI", "anAttrName")
```

item(index)

Node item(index)

W3C DOM Level 1 NamedNodeMap method. Returns the indicated Node from the NamedNodeMap. The index parameter is of type unsigned long. The index is 0-based.

removeNamedItem(name)

Node removeNamedItem(name)

W3C DOM Level 1 NamedNodeMap method. Removes the indicated node from the NamedNodeMap and returns an unattached node. The name parameter is of type String.

removeNamedItemNS(namespaceURI, localName)

Node removeNamedItemNS(namespaceURI, localName)

W3C DOM Level 2 NamedNodeMap method. Removes and returns the node specified by namespace URI and local name.

Table A-19 Parameters for the `removeNamedItemNS` Method

Parameter	Description
<code>namespaceURI</code>	Specifies the <code>namespaceURI</code> of the node to remove.
<code>localName</code>	Specifies the <code>localName</code> of the node to remove.

Example:

```
Temp.XPath("A/B").item(0).getAttributes().removeNamedItemNS("someURI",  
"anAttrName")
```

setNamedItem(arg)

`Node setNamedItem(arg)`

W3C DOM Level 1 `NamedNodeMap` method. Returns a `Node`. The `arg` parameter is of type `Node`.

setNamedItemNS(Node arg)

`Node setNamedItemNS(arg)`

W3C DOM Level 2 `NamedNodeMap` method. If the new `Node` replaces an existing node, the replaced `Node` is returned, otherwise `null` is returned.

Example:

```
var item = Temp.XPath("A/B").item(0);  
item.getAttributes().setNamedItemNS(aNodeObject)
```

A.3.8 Text

Lets you work with text.

splitText(offset)

`Text splitText(offset)`

W3C DOM Level 1 `Element` method. Removes the text up to the `offset` and creates an unattached text node with the removed text. The `offset` parameter is of type `unsigned long`. A `Text` also has all the properties and methods of `CharacterData`.

A.3.9 DocumentType

Lets you work with document types. This section includes the following topics:

- ♦ [“name” on page 441](#)
- ♦ [“entities” on page 441](#)
- ♦ [“internalSubset” on page 441](#)
- ♦ [“notations” on page 441](#)
- ♦ [“publicId” on page 441](#)
- ♦ [“systemId” on page 441](#)

name

W3C DOM Level 1 `DocumentType` property. This property returns a `String` representing the document type name.

entities

W3C DOM Level 1 `DocumentType` property. This property returns a `NamedNodeMap` of the entities defined in the document.

internalSubset

W3C DOM Level 2 `DocumentType` property. This property returns a `String` representing the internal subset as a string.

notations

W3C DOM Level 1 `DocumentType` property. This property returns a `NamedNodeMap` of the notations defined in the document.

publicId

W3C DOM Level 2 `DocumentType` property. This property returns a `String` representing the public identifier of the external subset.

systemId

W3C DOM Level 2 `DocumentType` property. This property returns a `String` representing the system identifier of the external subset.

A.3.10 DOMImplementation

Lets you work with DOM implementations. This section includes the following topics:

- ♦ [“`createDocument\(namespaceURI, qualifiedName, doctype\)`” on page 441](#)
- ♦ [“`createDocumentType\(qualifiedName, publicID, systemID\)`” on page 442](#)
- ♦ [“`hasFeature\(feature, version\)`” on page 442](#)

`createDocument(namespaceURI, qualifiedName, doctype)`

`Document createDocument(namespaceURI, qualifiedName, doctype)`

W3C DOM Level 2 `DOMImplementation` method. Creates an XML Document object of the specified type with its document element.

Table A-20 Parameters for the `DOMImplementation` Method

Parameter	Description
<code>namespaceURI</code>	Specifies the namespaceURI of the document element to create.
<code>qualifiedName</code>	Specifies the qualified name of the document element to create. <code>qualifiedName = namespaceprefix + : + localName</code>
<code>doctype</code>	Specifies the type of document to create, or null.

createDocumentType(qualifiedName, publicID, systemID)

`DocumentType createDocumentType(qualifiedName, publicID, systemID)`

W3C DOM Level 2 `DOMImplementation` method. Creates an empty `DocumentType` node. Parameters: `qualifiedName` is a string of the name of the document type to create. `publicID` is the external subset public identifier. `systemID` is the external subset system identifier. Note: `qualifiedName = namespaceprefix + : + localName`

Table A-21 Parameters for the `createDocumentType` Method

Parameter	Description
<code>qualifiedName</code>	Specifies the qualified name of the document element to create. <code>qualifiedName = namespaceprefix + : + localName</code>
<code>publicID</code>	Specifies the external subset public identifier.
<code>systemID</code>	Specifies the external subset system identifier.

hasFeature(feature, version)

`boolean hasFeature(feature, version)`

W3C DOM Level 1 `DOMImplementation` method. Returns a Boolean. The `feature` parameter is of type String. The `version` parameter is of type String.

A.3.11 Notation

Lets you work with notation. This section includes the following topics:

- ♦ [“publicId” on page 442](#)
- ♦ [“systemId” on page 442](#)

publicId

W3C DOM Level 2 This property returns a String representing the public identifier of the external subset.

systemId

W3C DOM Level 2 property. This property returns a String representing the system identifier of the external subset.

A.3.12 Entity

Lets you work with entities. This section includes the following topics:

- ♦ [“publicId” on page 443](#)
- ♦ [“systemId” on page 443](#)
- ♦ [“notationName” on page 443](#)

publicId

W3C DOM Level 2 property. This property returns a String representing the public identifier of the external subset.

systemId

W3C DOM Level 2 property. This property returns a String representing the system identifier of the external subset.

notationName

W3C DOM Level 1 Entity property. This property is of type String. An Entity also has all the properties and methods of Node.

A.3.13 ProcessingInstruction

Lets you work with processing instructions. This section includes the following topics:

- ♦ [“target” on page 443](#)
- ♦ [“data” on page 443](#)

target

W3C DOM Level 1 ProcessingInstruction property. This property is a String representation of the target part of a Processing Instruction.

data

W3C DOM Level 1 ProcessingInstruction property. This property is a String representation of the data part of a Processing Instruction.

A.4 ECMAScript Core

This section lists all ECMAScript core methods and properties supported by the ECMA Expression Builder. This section includes the following topics:

- ♦ [Section A.4.1, “Array Object,” on page 444](#)
- ♦ [Section A.4.2, “Boolean Object,” on page 445](#)
- ♦ [Section A.4.3, “Date Object,” on page 445](#)
- ♦ [Section A.4.4, “Function Object,” on page 452](#)

- ♦ [Section A.4.5, “Global,” on page 452](#)
- ♦ [Section A.4.6, “Math Object,” on page 454](#)
- ♦ [Section A.4.7, “Number Object,” on page 459](#)
- ♦ [Section A.4.8, “Object,” on page 461](#)
- ♦ [Section A.4.9, “String Object,” on page 461](#)

A.4.1 Array Object

Lets you work with arrays. This section includes the following topics:

- ♦ [“Array\(item0, item1, . . .\)” on page 444](#)
- ♦ [“join\(separator\)” on page 444](#)
- ♦ [“length” on page 444](#)
- ♦ [“reverse\(\)” on page 444](#)
- ♦ [“sort\(comparefn\)” on page 444](#)
- ♦ [“toString\(\)” on page 445](#)

Array(item0, item1, . . .)

`Array()`

Constructor

join(separator)

`Array join(separator)`

The elements of the array are converted to strings, and these strings are then concatenated, separated by occurrences of the separator. If no separator is provided, a single comma is used as the separator.

length

Array length. The length property of this Array object

reverse()

`reverse()`

The elements of the array are rearranged so as to reverse their order. The operation is done in-place, meaning that the original array is modified.

sort(comparefn)

`Array sort()`

The elements of this array are sorted. The sort is not necessarily stable. If `comparefn` is supplied, it should be a function that accepts two arguments `x` and `y` and returns a negative value if `x < y`, zero if `x = y`, or a positive value if `x > y`.

toString()

Array toString()

The elements of this object are converted to strings, and these strings are then concatenated, separated by comma characters. The result is the same as if the built-in join method were invoked for this object with no argument.

A.4.2 Boolean Object

There is seldom a need to use the object version of Boolean in place of True/False literal values. This object is provided for completeness. It is specified in ECMA-262.

This section includes the following topics:

- ♦ [“Boolean\(\)” on page 445](#)
- ♦ [“toString\(\)” on page 445](#)
- ♦ [“valueOf\(\)” on page 445](#)

Boolean()

Boolean([true/false])

Constructor. Optionally takes either True or False as an argument.

toString()

Boolean toString()

If this Boolean value is True, then the string “true” is returned. Otherwise, this Boolean value must be false, and the string “false” is returned.

valueOf()

Boolean valueOf()

Returns this Boolean value.

A.4.3 Date Object

Lets you work with dates and times. This section includes the following topics:

- ♦ [“Date\(\)” on page 446](#)
- ♦ [“getDate\(\)” on page 447](#)
- ♦ [“getDay\(\)” on page 447](#)
- ♦ [“getFullYear\(\)” on page 447](#)
- ♦ [“getHours\(\)” on page 447](#)
- ♦ [“getMilliseconds\(\)” on page 447](#)
- ♦ [“getMinutes\(\)” on page 447](#)
- ♦ [“getMonth\(\)” on page 447](#)
- ♦ [“getSeconds\(\)” on page 447](#)

- ♦ “getTime()” on page 447
- ♦ “getTimezoneOffset()” on page 448
- ♦ “getUTCDate()” on page 448
- ♦ “getUTCDay()” on page 448
- ♦ “getUTCFullYear()” on page 448
- ♦ “getUTCHours()” on page 448
- ♦ “getUTCMilliseconds()” on page 448
- ♦ “getUTCMinutes()” on page 448
- ♦ “getUTCSeconds()” on page 448
- ♦ “getYear()” on page 449
- ♦ “parse(string)” on page 449
- ♦ “setDate(date)” on page 449
- ♦ “setFullYear(year[,mon[,date]])” on page 449
- ♦ “setHours(hour[,min[,sec[,ms]]])” on page 449
- ♦ “setMilliseconds(ms)” on page 449
- ♦ “setMinutes(min[,sec[,ms]])” on page 449
- ♦ “setMonth(mon[,date])” on page 449
- ♦ “setSeconds(sec [, ms])” on page 450
- ♦ “setTime(time)” on page 450
- ♦ “setUTCDate(date)” on page 450
- ♦ “setUTCFullYear(year[,mon[,date]])” on page 450
- ♦ “setUTCHours(min[,sec[,ms]])” on page 450
- ♦ “setUTCMilliseconds(ms)” on page 450
- ♦ “setUTCMinutes(min[,sec[,ms]])” on page 450
- ♦ “setUTCMonth(mon[,date])” on page 451
- ♦ “setUTCSeconds(sec [, ms])” on page 451
- ♦ “setYear(year)” on page 451
- ♦ “toLocaleString()” on page 451
- ♦ “toString()” on page 451
- ♦ “toUTCString()” on page 451
- ♦ “UTC()” on page 451
- ♦ “valueOf()” on page 451

Date()

Date ()

The constructor of the Date can have various signatures. The date constructor format can accept up to seven parameters, in the following format: new Date(year,month,date,hrs,mins,secs,ms). This date must be a java.util.Date object and not an ECMAScript Date object if you intend to use it with the Identity Manager User Application workflow system.

getDate()

`getDate()`

Returns `DateFromTime(LocalTime(t))`.

getDay()

`getDay()`

Returns `WeekDay(LocalTime(t))`. The days of week are numbered from 0-6. The number 0 represents Sunday and 6 represents Saturday.

getFullYear()

`getFullYear()`

Returns `YearFromTime(LocalTime(t))`.

getHours()

`getHours()`

Returns `HourFromTime(LocalTime(t))`.

getMilliseconds()

`getMilliseconds()`

Returns `msFromTime(LocalTime(t))`.

getMinutes()

`getMinutes()`

Returns `MinFromTime(LocalTime(t))`.

getMonth()

`getMonth()`

Returns `MonthFromTime(LocalTime(t))`. The months are returned as an integer value from 0-11. The number 0 represents January and 11 represents December.

getSeconds()

`getSeconds()`

Returns `SecFromTime(LocalTime(t))`.

getTime()

`getTime()`

Returns a number, which is this time value. The number value is a millisecond representation of the specified Date object.

getTimezoneOffset()

`getTimezoneOffset()`

Returns $(t * \text{LocalTime}(t)) / \text{msPerMinute}$. The difference is in minutes between (GMT) and local time.

getUTCDate()

`getUTCDate()`

Returns `DateFromTime(t)`.

getUTCDay()

`getUTCDay()`

Returns `WeekDay(t)`. The days of week are numbered from 0-6. The number 0 represents Sunday and 6 represents Saturday.

getUTCFullYear()

`getUTCFullYear()`

Returns `YearFromTime(t)`. There is no `getYearUTC` method, so it must be used to obtain a year from a UTC Date object.

getUTCHours()

`getUTCHours()`

Returns `HourFromTime(t)`.

getUTCMilliseconds()

`getUTCMilliseconds()`

Returns `msFromTime(t)`.

getUTCMinutes()

`getUTCMinutes()`

Returns `MinFromTime(t)`.

getUTCSeconds()

`getUTCSeconds()`

Returns `SecFromTime(t)`.

getFullYear()

`getFullYear()`

Returns `YearFromTime(LocalTime(t)) - 1900`. The function `getFullYear()` is preferred for nearly all purposes because it avoids the year 2000 problem.

parse(string)

`parse(string)`

Applies the `ToString` operator to its argument and interprets the resulting string as a date; it returns a number, the number which is a UTC time value corresponding to the date. The string is interpreted as a local time, a UTC time, or a time in some other time zone, depending on the contents of the string.

setDate(date)

`setDate(date)`

Sets the day of the month, using an integer from 1 to 31, for the supplied date according to local time.

setFullYear(year[,mon[,date]])

`setFullYear(year[,mon[,date]])`

Sets the `[Value]` property of this value to UTC `ECMAScript.Date`. Returns the value of the `[Value]` property of this value.

setHours(hour[,min[,sec[,ms]]])

`setHours(hour[,min[,sec[,ms]]])`

Sets the `[Value]` property of this value to UTC time. Returns the value of the `[Value]` property of this value. When entering a value for hours, an hour value greater than 23 is added to the existing hour value, not set.

setMilliseconds(ms)

`setMilliseconds(ms)`

Computes UTC from argument and sets the `[Value]` property of this value to `TimeClip(calculatedUTCtime)`. Returns the value of the `[Value]` property of this value.

setMinutes(min[,sec[,ms]])

`setMinutes(min[,sec[,ms]])`

Sets the `[Value]` property of this value to UTC time. Returns the value of the `[Value]` property of this value.

setMonth(mon[,date])

`setMonth(mon[,date])`

Sets the [Value] property of this value to UTC ECMAScript.Date. Returns the value of the [Value] property of this value. If the [Value] property of this exceeds 11, the [Value] property for this is added to the existing month, not set.

setSeconds(sec [, ms])

```
setSeconds(sec [, ms ] )
```

Sets the [Value] property of this value to UTC time. Returns the value of the [Value] property of this value.

setTime(time)

```
setTime(time)
```

Sets the [Value] property of this value to TimeClip(time). Returns the value of the [Value] property of this value. The [Value] property of this is a millisecond value that is converted by the TimeClip(time) method.

setUTCDate(date)

```
setUTCDate(date)
```

Sets the [Value] property of this value to ECMAScript.Date. Returns the value of the [Value] property of this value. If the [Value] property of this exceeds 30 or 31, the [Value] of this is added to the existing date value, not set.

setUTCFullYear(year[,mon[,date]])

```
setUTCFullYear(year [, mon [, date] ] )
```

Sets the [Value] property of this value to ECMAScript.Date. Returns the value of the [Value] property of this value.

setUTCHours(min[,sec[,ms]])

```
setUTCHours (min [, sec [, ms] ] )
```

Sets the [Value] property of this value to time. Returns the value of the [Value] property of this value. When entering a value for hours, an hour value greater than 23 is added to the existing hour value, not set.

setUTCMilliseconds(ms)

```
setUTCMilliseconds (ms)
```

Sets the [Value] property of this value to time and returns the value of the [Value] property of this value.

setUTCMinutes(min[,sec[,ms]])

```
setUTCMinutes (min [, sec [, ms] ] )
```

Sets the [Value] property of this value to time. Returns the value of the [Value] property of this value.

setUTCMonth(mon[,date])

`setUTCMonth(mon[,date])`

Sets the [Value] property of this value to `ECMAScript.Date`. Returns the value of the [Value] property of this value. If the [Value] property of this exceeds 11, the [Value] property for this is added to the existing month, not set.

setUTCSeconds(sec [, ms])

`setUTCSeconds(sec [, ms])`

Sets the [Value] property of this value to time. Returns the value of the [Value] property of this value.

setYear(year)

`setYear(year)`

Sets the [Value] property of this value to UTC `ECMAScript.Date`. Returns the value of the [Value] property of this value.

toLocaleString()

`toLocaleString()`

Returns a string value. The contents of the string are implementation-dependent, but are intended to represent the Date in a convenient, human-readable form appropriate to the geographic or cultural locale.

toString()

`toString()`

Returns this string value. The contents of the string are implementation-dependent, but are intended to represent the Date in a convenient, human-readable form in the current time zone.

toUTCString()

`toUTCString()`

Returns a string value. The contents of the string are implementation-dependent, but are intended to represent the Date in a convenient, human-readable form in UTC.

UTC()

`UTC()`

Can accept a number of different arguments. The `UTC` function differs from the `Date` constructor in two ways: it returns a time value as a number, rather than creating a `Date` object, and it interprets the arguments in UTC rather than as local time.

valueOf()

`valueOf()`

Returns a number, which is this time value. The `valueOf()` function is not generic, so it generates a runtime error if the object is not a Date object.

A.4.4 Function Object

Used to work with the Function Object. This section includes the following topics:

- ♦ [“Function\(p1, p2, . . . , pn, body\)” on page 452](#)
- ♦ [“length” on page 452](#)
- ♦ [“toString\(\)” on page 452](#)

Function(p1, p2, . . . , pn, body)

Function Constructor. The last argument specifies the body (executable code) of a function; any preceding arguments specify formal parameters.

length

The value of the length property is usually an integer that indicates the “typical” number of arguments expected by the function. However, the language permits the function to be invoked with some other number of arguments. The behavior of a function when invoked on a number of arguments other than the number specified by its length property depends on the function.

toString()

```
String toString()
```

An implementation-dependent representation of the function is returned. This representation has the syntax of a `FunctionDeclaration`. The use and placement of whitespace, line terminators, and semicolons within the representation string is implementation-dependent.

A.4.5 Global

ECMAScript provides certain “top-level” methods and properties, so-called because they are available from any context: They are not parented by any particular object.

This section includes the following topics:

- ♦ [“escape\(string\)” on page 453](#)
- ♦ [“eval\(x\)” on page 453](#)
- ♦ [“Infinity” on page 453](#)
- ♦ [“isFinite\(number\)” on page 453](#)
- ♦ [“isNaN\(value \)” on page 453](#)
- ♦ [“NaN” on page 453](#)
- ♦ [“parseFloat\(string\)” on page 453](#)
- ♦ [“parseInt\(string, radix\)” on page 454](#)
- ♦ [“unescape\(string\)” on page 454](#)

escape(string)

String escape()

The escape function computes a new, URL-legal version of a string in which certain URL-illegal characters have been replaced by hexadecimal escape sequences.

eval(x)

eval()

When the eval function is called with one argument *x*, the following steps are taken:

1. If *x* is not a string value, return *x*.
2. Parse *x* as an ECMAScript Program. If the parse fails, generate a runtime error.
3. Evaluate the program from Step 2.
4. If Result(3) is “normal” completion after value “*V*”, return the value *V*.
5. Return undefined.

Infinity

A special primitive value representing positive infinity.

isFinite(number)

isFinite()

Applies Number() to its argument, then returns false if the result is NaN (Not a Number), +*, or **; otherwise, returns True.

isNaN(value)

isNaN()

Returns True if the argument evaluates to NaN (Not a Number); otherwise, returns False

NOTE: Any form of logical comparison of NaN against anything else, including itself, returns false. Use isNaN() to determine whether a variable (or a return value, etc.) is equal to NaN.

NaN

The primitive value NaN represents the set of IEEE standard Not-a-Number values.

parseFloat(string)

number parseFloat()

Produces a floating-point number by interpretation of the contents of the string argument. If the string cannot be converted to a number, the special value NaN (see “NaN” on page 453) is returned.

parseInt(string, radix)

`number parseInt()`

Produces an integer value dictated by interpretation of the contents of the string argument, according to the specified radix.

unescape(string)

`String unescape()`

Computes a new version of a string value in which escape sequences that might be introduced by the escape function are replaced with the character they represent.

A.4.6 Math Object

All of the Math object's properties and methods are static, which means you should prepend "Math" to the property or method name in your code. For example, use "Math.PI," not simply "PI."

This section includes the following topics:

- ♦ "E" on page 455
- ♦ "LN10" on page 455
- ♦ "LN2" on page 455
- ♦ "LOG2E" on page 455
- ♦ "LOG10E" on page 455
- ♦ "PI" on page 455
- ♦ "SQRT1.2" on page 455
- ♦ "SQRT2" on page 455
- ♦ "abs(x)" on page 455
- ♦ "acos(x)" on page 456
- ♦ "asin(x)" on page 456
- ♦ "atan(x)" on page 456
- ♦ "atan2(x,y)" on page 456
- ♦ "ceil(x)" on page 456
- ♦ "cos(x)" on page 457
- ♦ "exp(x)" on page 457
- ♦ "floor(x)" on page 457
- ♦ "log(x)" on page 457
- ♦ "max(x,y)" on page 457
- ♦ "min(x,y)" on page 458
- ♦ "pow(x,y)" on page 458
- ♦ "random()" on page 458
- ♦ "round(x)" on page 458
- ♦ "sin(x)" on page 458

- ♦ “`sqrt(x)`” on page 459
- ♦ “`tan(x)`” on page 459

E

The number value for e , the base of the natural logarithms, which is approximately 2.7182818284590452354.

LN10

The number value for the natural logarithm of 10, which is approximately 2.302585092994046.

LN2

The number value for the natural logarithm of 2, which is approximately 0.6931471805599453.

LOG2E

The number value for the base-2 logarithm of e , the base of the natural logarithms; this value is approximately 1.4426950408889634. The value of `Math.LOG2E` is approximately the reciprocal of the value of `Math.LN2`.

LOG10E

The number value for the base-10 logarithm of e , the base of the natural logarithms; this value is approximately 0.4342944819032518. The value of `Math.LOG10E` is approximately the reciprocal of the value of `Math.LN10`.

PI

The number value for π , the ratio of the circumference of a circle to its diameter, which is approximately 3.14159265358979323846.

SQRT1.2

The number value for the square root of $1/2$, which is approximately 0.7071067811865476. The value of `Math.SQRT1_2` is approximately the reciprocal of the value of `Math.SQRT2`.

SQRT2

The number value for the square root of 2, which is approximately 1.4142135623730951.

abs(x)

Number `abs(x)`

Returns the absolute value of the argument x ; in general, the result has the same magnitude as the argument but has a positive sign. The input value x can be any number value.

Example:

```
Math.abs(-123.23940) = 123.23940
```

acos(x)

Number `acos(x)`

Returns an implementation-dependent approximation to the arc cosine of the argument. The result is expressed in radians and ranges from +0 to +PI(3.14159...) radians. The input value `x` must be a number between -1.0 and 1.0.

Example:

```
PI/4 = 0.785 Math.acos(0.785) = 0.6681001997570769
```

asin(x)

Number `asin(x)`

Returns an implementation-dependent approximation to the arc sine of the argument. The result is expressed in radians and ranges from -PI/2 to +PI/2. The input value `x` must be a number between -1.0 and 1.0.

Example:

```
PI/4 = 0.785 Math.asin(0.785) = 0.9026961270378197
```

atan(x)

Number `atan(x)`

Returns an implementation-dependent approximation to the arc tangent of the argument. The result is expressed in radians and ranges from -PI/2 to +PI/2. The input value `x` can be any number.

Example:

```
3PI/4 = 2.355 Math.atan(2.355) = 1.169240427545485
```

atan2(x,y)

Number `atan2(x,y)`

Returns an implementation-dependent approximation to the arc tangent of the quotient `y/x` of the arguments `y` and `x`, where the signs of the arguments are used to determine the quadrant of the result. It is intentional and traditional for the two-argument arc tangent function that the argument named `y` be first and the argument named `x` be second. The result is expressed in radians and ranges from -PI to +PI. The input value `x` is the `x`-coordinate of the point. The input value `y` is the `y`-coordinate of the point.

Example:

```
PI/2 = 1.57 Math.atan2(1.57,-1.57) = 2.356194490192345
```

ceil(x)

Number `ceil(x)`

Returns the smallest (closest to -infinity) number value that is not less than the argument and is equal to a mathematical integer. If the argument is already an integer, the result is the argument itself. The input value x can be any numeric value or expression. The `Math.ceil(x)` function property is the same as `-Math.floor(-x)`. Example:

Example:

```
Math.ceil(123.78457) = 123
```

cos(x)

Number `cos(x)`

Returns an implementation-dependent approximation to the cosine of the argument. The argument must be expressed in radians.

exp(x)

Number `exp(x)`

Returns an implementation-dependent approximation to the exponential function of the argument (e raised to the power of the argument, where e is the base of the natural logarithms). The input value x can be any numeric value or expression greater than 0.

Example:

```
Math.exp(10) = 22026.465794806718
```

floor(x)

Number `floor(x)`

Returns the greatest (closest to +infinity) number value that is not greater than the argument and is equal to a mathematical integer. If the argument is already an integer, the result is the argument itself. The input value x can be any numeric value or expression.

Example:

```
Math.floor(654.895869) = 654
```

log(x)

Number `log(x)`

Returns an implementation-dependent approximation to the natural logarithm of the argument. The input value x can be any numeric value or expression greater than 0.

Example:

```
Math.log(2) = 0.6931471805599453
```

max(x,y)

Number `max(x,y)`

Returns the larger of the two arguments. The input values x and y can be any numeric values or expressions.

Example:

```
Math.max(12.345,12.3456) = 12.3456
```

min(x,y)

Number min(x,y)

Returns the smaller of the two arguments. The input values x and y can be any numeric values or expressions.

Example:

```
Math.min(-12.457,-12.567) = -12.567
```

pow(x,y)

Number pow(x,y)

Returns an implementation-dependent approximation to the result of raising x to the power of y. The input value x must be the number raised to a power. The input value y must be the power to which x is raised.

Example:

```
Math.pow(2,4) = 16
```

random()

Number random()

Takes no arguments and returns a pseudo-random number between 0 and 1. The number value has approximately uniform distribution over that range, using an implementation-dependent algorithm or strategy. This function takes no arguments.

Example:

```
Math.random() = 0.9545176397178535
```

round(x)

Number round(x)

Returns the number value that is closest to the argument and is equal to a mathematical integer. If two integer number values are equally close to the argument, then the result is the number value that is closer to +infinity. If the argument is already an integer, the result is the argument itself. The input value x can be any number.

Example:

```
Math.round(13.53) = 14
```

sin(x)

Number sin(x)

Returns an implementation-dependent approximation to the sine of the argument. The argument is expressed in radians. The input value x must be an angle measured in radians.

sqrt(x)

Number sqrt(x)

Returns an implementation-dependent approximation to the square root of the argument. The input value *x* must be any numeric value or expression greater than or equal to 0. If the input value *x* is less than zero, the string "NaN" is returned. (NaN stands for Not a Number.)

Example:

```
Math.sqrt(25) = 5
```

tan(x)

Number tan(x)

Returns an implementation-dependent approximation to the tangent of the argument. The argument is expressed in radians. The input value *x* must be an angle measured in radians.

A.4.7 Number Object

Lets you work with numeric values. The Number object is an object wrapper for primitive numeric values.

This section includes the following topics:

- ♦ ["MAX_VALUE" on page 459](#)
- ♦ ["MIN_VALUE" on page 459](#)
- ♦ ["NaN" on page 460](#)
- ♦ ["NEGATIVE_INFINITY" on page 460](#)
- ♦ ["Number\(\)" on page 460](#)
- ♦ ["POSITIVE_INFINITY" on page 460](#)
- ♦ ["toString\(radix\)" on page 460](#)
- ♦ ["valueOf\(\)" on page 460](#)

MAX_VALUE

The largest positive finite value of the number type (approximately 1.7976931348623157e308).

Example:

```
Number.MAX_VALUE
```

MIN_VALUE

The smallest positive nonzero value of the number type (approximately 5e-324).

Example:

```
Number.MIN_VALUE
```

NaN

The primitive value NaN represents the set of IEEE Standard Not-a-Number values.

Example:

```
Number.NaN
```

NEGATIVE_INFINITY

The value of negative infinity.

Example:

```
Number.NEGATIVE_INFINITY
```

Number()

```
Number()
```

The constructor of Number has two forms: Number(value) and Number().

POSITIVE_INFINITY

The value of positive infinity.

Example:

```
Number.POSITIVE_INFINITY
```

toString(radix)

```
toString()
```

If the radix is the number 10 or is not supplied, then this number value is given as an argument to the ToString operator; the resulting string value is returned. If the radix is supplied and is an integer from 2 to 36, but not 10, the result is a string, the choice of which is implementation-dependent. The toString function is not generic; it generates a runtime error if this value is not a Number object. Therefore, it cannot be transferred to other kinds of objects for use as a method.

valueOf()

```
valueOf()
```

Returns this number value. The valueOf function is not generic; it generates a runtime error if its value is not a Number object. Therefore, it cannot be transferred to other kinds of objects for use as a method.

A.4.8 Object

Used to work with objects. Object is the primitive JavaScript object type. All ECMAScript objects are descended from object. That is, all ECMAScript objects have the methods defined for object.

This section includes the following topics:

- ♦ [“Object\(\)” on page 461](#)
- ♦ [“toString\(\)” on page 461](#)
- ♦ [“valueOf\(\)” on page 461](#)

Object()

Constructor for object.

toString()

`Object toString()`

When the `toString` method is called on an arbitrary object, the following steps are taken:

1. Get the `[[Class]]` property of this object.
2. Compute a string value by concatenating the three strings “[object “, `Result(1)`, and “]”.
3. Return `Result(2)`.

valueOf()

`Object valueOf()`

The `valueOf` method for an object usually returns the object; however, if the object is a wrapper for a host object, as might be created by the `Object` constructor, the contained host object should be returned.

A.4.9 String Object

Used to work with String Objects. This section includes the following topics:

- ♦ [“String\(x\)” on page 462](#)
- ♦ [“charAt\(pos\)” on page 462](#)
- ♦ [“charCodeAt\(pos\)” on page 462](#)
- ♦ [“fromCharCode\(char0, char1, . . .\)” on page 462](#)
- ♦ [“indexOf\(searchString, pos\)” on page 462](#)
- ♦ [“lastIndexOf\(searchString, pos\)” on page 462](#)
- ♦ [“length” on page 463](#)
- ♦ [“match\(RegExp\)” on page 463](#)
- ♦ [“replace\(RegExp, String\)” on page 463](#)
- ♦ [“search\(RegExp\)” on page 463](#)
- ♦ [“split\(separator\)” on page 463](#)
- ♦ [“substring\(start, end\)” on page 463](#)

- ♦ `toLowerCase()` on page 463
- ♦ `toString()` on page 463
- ♦ `toUpperCase()` on page 464
- ♦ `valueOf()` on page 464

String(x)

`String(x)`

The constructor of the string.

charAt(pos)

`charAt(pos)`

Returns a string containing the character at position `pos` in the string resulting from converting this object to a string. If there is no character at that position, the result is the empty string. The result is a string value, not a string object.

charCodeAt(pos)

`charCodeAt(pos)`

Returns a number (a nonnegative integer less than 2^{16}) representing the Unicode code point encoding of the character at position `pos` in the string resulting from converting this object to a string. If there is no character at that position, the result is NaN.

fromCharCode(char0, char1, . . .)

`fromCharCode(char0, char1, . . .)`

Returns a string value containing as many characters as the number of arguments. Each argument specifies one character of the resulting string, with the first argument specifying the first character, and so on, from left to right. An argument is converted to a character by applying the operation `ToUint16` and regarding the resulting 16-bit integer as the Unicode code point encoding of a character. If no arguments are supplied, the result is the empty string.

indexOf(searchString, pos)

`indexOf(searchString, pos)`

If the given `searchString` appears as a substring of the result of converting this object to a string, at one or more positions that are at or to the right of the specified position, then the index of the leftmost such position is returned; otherwise, -1 is returned. If position is undefined or not supplied, 0 is assumed, in order to search all of the string.

lastIndexOf(searchString, pos)

`lastIndexOf(searchString, pos)`

If the given `searchString` appears as a substring of the result of converting this object to a string, at one or more positions that are at or to the left of the specified position, then the index of the rightmost such position is returned; otherwise, -1 is returned. If position is undefined or not supplied, the length of the string value is assumed, in order to search all of the string.

length

Returns the length of the String.

match(RegExp)

`String match(RegExp)`

Takes a regular expression object as argument. It returns an array of matches; otherwise, returns null.

replace(RegExp, String)

`String replace(RegExp, String)`

Takes a regular expression and a replacement string. It returns the original string with replacements accomplished.

search(RegExp)

`String search(RegExp)`

Takes a regular expression as the sole arg and returns the offset of the first substring that matches, or -1 on no match.

split(separator)

`split(separator)`

Returns an Array object, into which substrings of the result of converting this object to a string have been stored. The substrings are determined by searching from left to right for occurrences of the given separator; these occurrences are not part of any substring in the returned array, but serve to divide the string value. The separator may be a string of any length.

substring(start, end)

`substring(start, end)`

Returns a substring of the result of converting this object to a string, starting from character position start and running to the position end of the string. If the second parameter is not present, the end position is considered the end of the string. The result is a string value, not a string object.

toLowerCase()

`toLowerCase()`

Returns a string equal in length to the length of the result of converting this object to a string. The result is a string value, not a string object. Every character of the result is equal to the corresponding character of the string, unless that character has a Unicode 2.0 lowercase equivalent, in which case the lowercase equivalent is used instead. The canonical Unicode 2.0 case mapping must be used, which does not depend on implementation or locale.

toString()

`toString()`

Returns this string value. When concerned with the placement and use of whitespace line terminators and semicolons within the representation, the string value is implementation-dependent.

toUpperCase()

`toUpperCase()`

Returns a string equal in length to the length of the result of converting this object to a string. The result is a string value, not a string object. Every character of the result is equal to the corresponding character of the string, unless that character has a Unicode 2.0 uppercase equivalent, in which case the uppercase equivalent is used instead. The canonical Unicode 2.0 case mapping must be used, which does not depend on implementation or locale.

valueOf()

`valueOf()`

Returns this string value. The `valueOf()` function is not generic, so it generates a runtime error if the object is not a `String` object.